
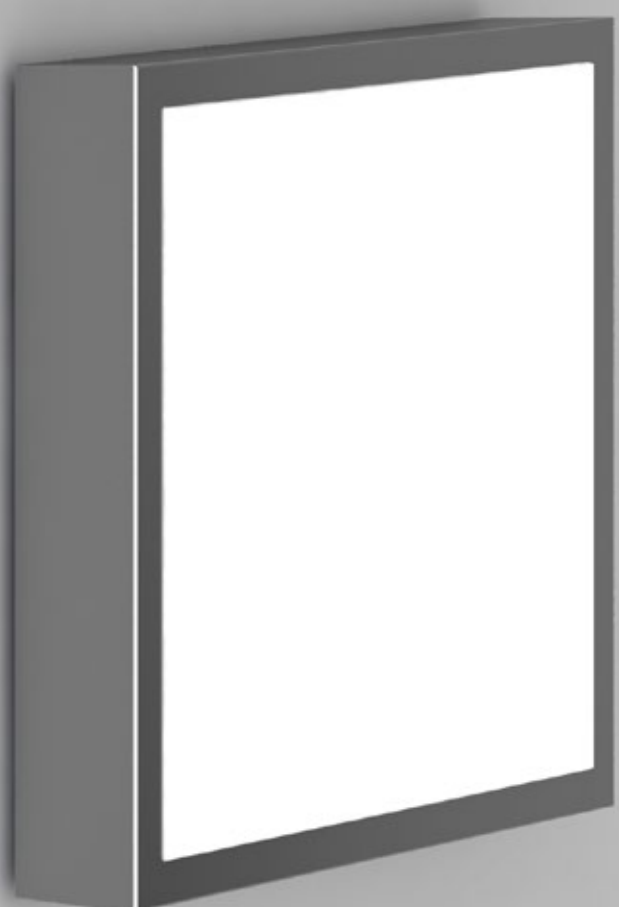




base

Ideal illumination for architectural entrances. ADA-compliant well suited for multiple hallway or wall applications. Durable, suitable for damp or dry location.

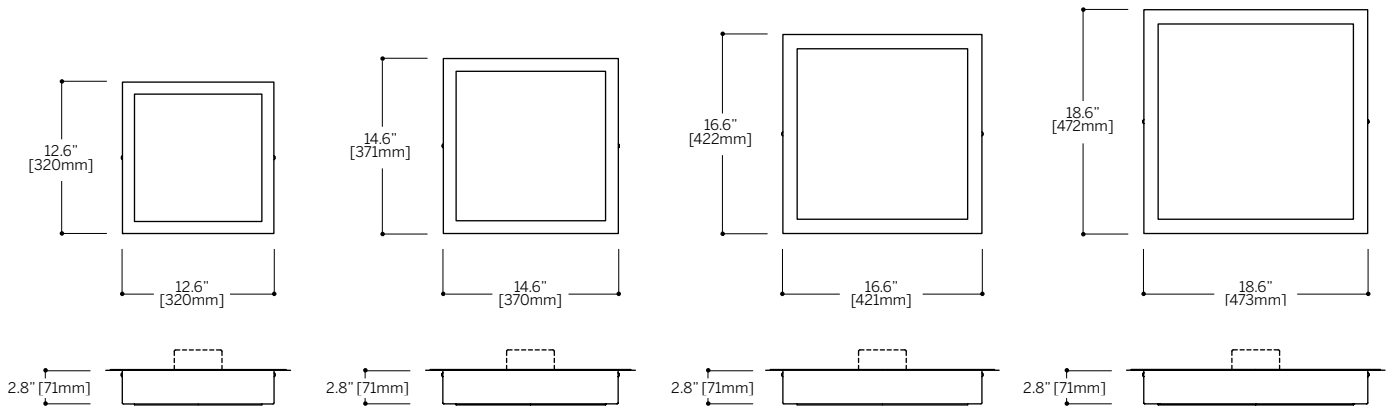

 **Finish**
Satin Stainless Steel

 **Optional finish**
Satin Nickel
Painted White
Painted Custom Color

 **Diffuser**
Satin White Opal Acrylic

 **Lamping**

1800.S33SW10-12.6
1 x 22 Watt / 2GX13

1800.S36SW10-14.6
1 x 22 + 40 Watt / 2GX13

1800.S34SW10-14.6
1 x 40 Watt / 2GX13

1800.S35SW10-14.6
1 x 55 Watt / 2GX13

1800.S36SW10-16.6
1 x 22 + 40 Watt / 2GX13

1800.S34SW10-16.6
1 x 40 Watt / 2GX13

1800.S35SW10-16.6
1 x 55 Watt / 2GX13

1800.S172SW10-16.6
2 x 24 Watt / 2G11

1800.S36SW10-18.6
1 x 22 + 40 Watt / 2GX13

1800.S34SW10-18.6
1 x 40 Watt / 2GX13

1800.S35SW10-18.6
1 x 55 Watt / 2GX13

1800.S193SW10-18.6
3 x 36 Watt / 2G11

1800.S194SW10-18.6
4 x 36 Watt / 2G11

**Consult factory for LED
and dimming options**
Specify 120 or 277 Volt

