


Edgeless Cove LED Specifications

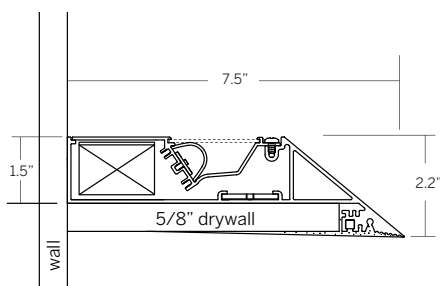

Ordering Information

Model	Type	Length	LED ³	Color ⁴	Voltage	Power ⁵	Diffuser	Mount	Options ²
WG-EC	S ¹	A	L	827	UNV	S	S (STD)	P	LEC REC LREC LWR RWR
	PC ²	A x B	M	830		D010	OF ⁶		
	PR ²	A x B x C	H	835		D3W	SF ⁶		
	PZ ²	A x B x A x B		840		DES			
				927					
				930					
				935					
				940		120	DFPN		

Luminaire

- Indirect cove system featuring plaster-in precision knife edge for clean, minimal effect.
- White LED light source.
- Lengths and angles factory cut to exact field dimensions.
- Powder coat painted white - RAL 9010.
- Snap-on satin diffuser optimized for forward distribution (standard).

Type

- S = Straight run¹
- PC = Standard patterns coffer 2, 3 or 4 sided with 90° corners²
- PR = Standard patterns raft 2, 3 or 4 sided with 90° corners²
- PZ = Non-standard patterns and/or corners other than 90°, consult factory²

Length

- A, B, C = specify feet & inches to the nearest 0.25" (i.e. 6' 5.5") For patterns specify each length (i.e. 2 sided: A x B = 6' 5" x 6'; 3 sided: A x B x C; 4 sided: A x B x A x B)

LED³

- L = Low Power (3W/ft)
- M = Mid Power (6W/ft)
- H = High Power (10W/ft)

Color / Lumens⁴

- 80+ CRI minimum (Low/Mid/High)
- 827 = 2700K, 294/545/862 lm/ft
 - 830 = 3000K 294/545/862 lm/ft
 - 835 = 3500K, 305/568/897 lm/ft
 - 840 = 4000K, 311/579/915 lm/ft
 - For 90+ CRI specify 927, 930, etc

Voltage

- UNV = 120-277V
- 120 = 120V (DFPN only)

Power Supply (integral)⁵

- S = Standard driver, 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- D3W = Lutron, 1%, 3-wire fluorescent dimming, 120-277V
- DES = Lutron, 1%, EcoSystem E1/E2 digital dimming, 120-277V
- DFPN = Lutron 1% forward phase with neutral, 120V only

Diffuser


- S = Snap-on satin diffuser (standard)
- OF = Opal flat diffuser⁶
- SF = Satin flat diffuser⁶

Mounting

- P = Plaster-in

Options²

- LEC = Left end cap
- REC = Right end cap
- LREC = Left & Right end caps
- LWR = Left wall return
- RWR = Right wall return
- Contact factory for emergency lighting options

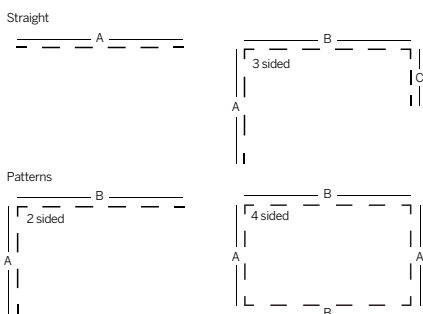


- 1 Standard setup assumes the cove ends at a perpendicular wall and the led board is set back from the end to minimize light on the perpendicular wall. Contact us for options.
- 2 See pattern specsheet.
- 3 Wattage shown does not include power supplies/drivers.
- 4 Delivered lumens with snap-on satin diffuser shown.
- 5 See power supply specsheet.
- 6 Recommended for wipe down applications.



Edgeless Cove LED Ends and Corners



End Caps




WG-EC-LEC
Left End Cap*


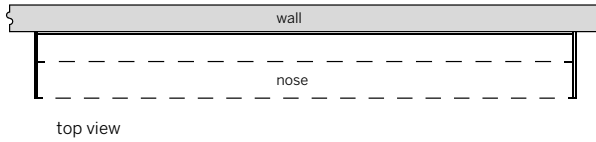


WG-EC-REC:
Right End Cap*

End Returns



WG-EC-LWR:
Left End Wall Return*

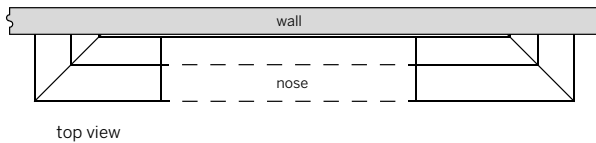

WG-EC-RWR:
Right End Wall Return*