




clearline

PENDANT


The ClearLine pendant is an elegant and refined option for direct and indirect illumination in offices or reception desks. Adjustable accent downlights are provided with independent aiming mechanism. ClearLine pendant mounts via aircraft cable. The mounting height is adjusted without tools.

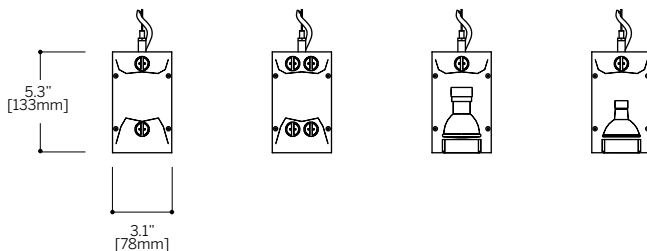


Consult factory for LED options






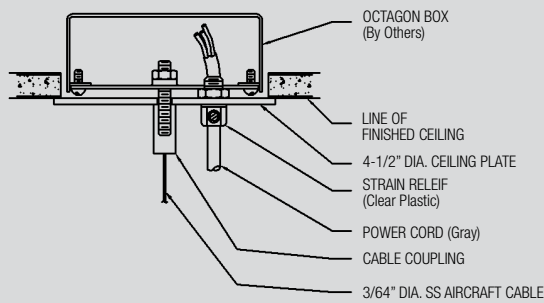


STANDARD SUPPORT CABLE/FEED
OPTION: WS-1

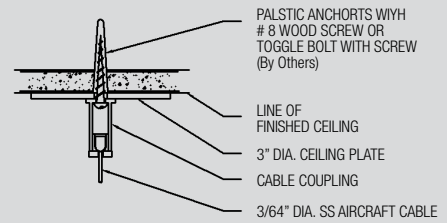

SUPPORT CABLE, OPTION: S-1

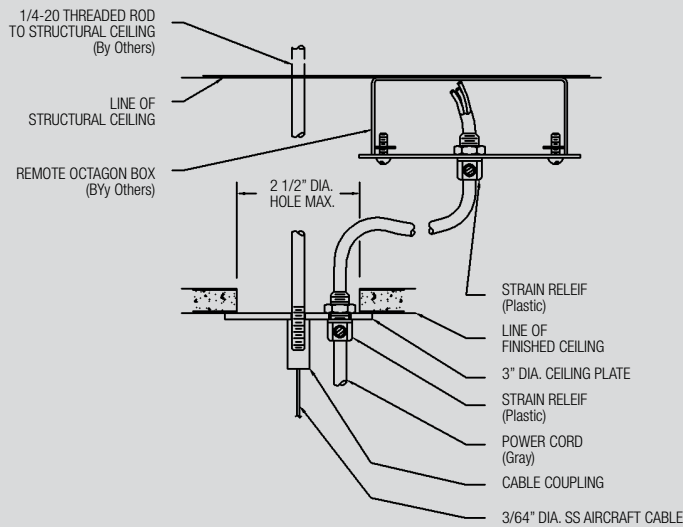

OPTIONAL SUPPORT CABLE/FEED
OPTION: WS-2

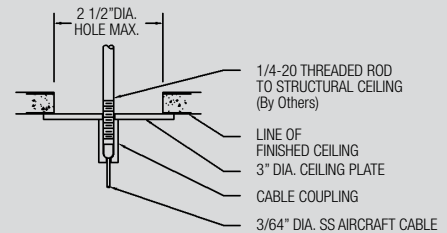

SUPPORT CABLE, OPTION: S-2

CEILING PLATE AVAILABLE IN:
Clear Anodized ALUMINIUM - TO MATCH FIXTURE - STANDARD
CUSTOM COLOR - SELECT FROM STANDARDS

NOTE:
* CABLE COUPLINGS ARE AVAILABLE IN NICKEL FINISH ONLY
* SUPPORT CABLE AND POWER CORD 50" LONG - STANDARD



Series	
CL2P	Pendant
CL2W	Wall
CL2S	Surface

*	Fixture Length	*	Lamping	*	Diffuser	*	Suspension / Mounting	*	Voltage
		00	None	00	None	SM	Surface Mounted	1	120 Volts
3	36"	40	1 x 14 Watt / G5	SA	Clear Satin Acrylic	C	Cable Suspension	2	277 Volts
4	48"	402	2 x 14 Watt / G5	SW	Satin White Opal Acrylic	S	Stem Suspension	U	120/277 Volts
6	72"	41	1 x 24 Watt H0 / G5	CX	Extruder Aluminum Cover	WS	Wall Small Bracket		
8	96"	412	2 x 24 Watt H0 / G5						
9	108"	42	1 x 21 Watt / G5	*	Reflector	*	Cable Support / Power Feed	*	Circuit
10	120"	422	2 x 21 Watt / G5	AR	Asymmetric Reflector	01	Option: WS-1	1	Single
12	144"	423	3 x 21 Watt / G5	SR	Symmetric Reflector	02	Option: WS-2	2	Dual
		424	4 x 21 Watt / G5					3	Triple
		43	1 x 39 Watt H0 / G5	*	Accent Downlight	*	Cable Support	D	Dimming
		432	2 x 39 Watt H0 / G5	00	NONE	03	Option: S-1	2D	Dual Dimming
		433	3 x 39 Watt H0 / G5	80	1 x 50 Watt MR16 / GU5.3 <i>*Please specify spacing and location</i>	04	Option: S-2	EM	Emergency Ballast
		434	4 x 39 Watt H0 / G5	91	1 x 39 Watt MR16, MH / GX10 <i>*Please Specify spacing and location</i>				
		44	1 x 28 Watt / G5	MS	Monopoint Steng Socket <i>*Please specify spacing and location</i>			*	Finish
		442	2 x 28 Watt / G5					16	Clear Anodized Aluminum
		443	3 x 28 Watt / G5					21	Painted White
		444	4 x 28 Watt / G5					22	Painted Custom Color
		446	6 x 28 Watt / G5						
		448	8 x 28 Watt / G5						
		45	1 x 54 Watt H0 / G5						
		452	2 x 54 Watt H0 / G5						
		453	3 x 54 Watt H0 / G5						
		454	4 x 54 Watt H0 / G5						
		456	6 x 54 Watt H0 / G5						
		458	8 x 54 Watt H0 / G5						

** Consult the factory for LED lamping options*

Series	Fixture Length	Uplight Lamping	Uplight Diffuser	Uplight Reflector	Downlight Lamping	Downlight Diffuser	Downlight Reflector	Accent Downlight	Suspension/ Mounting	Cable Support / Power Feed	Cable Support	Voltage	Circuit	Finish