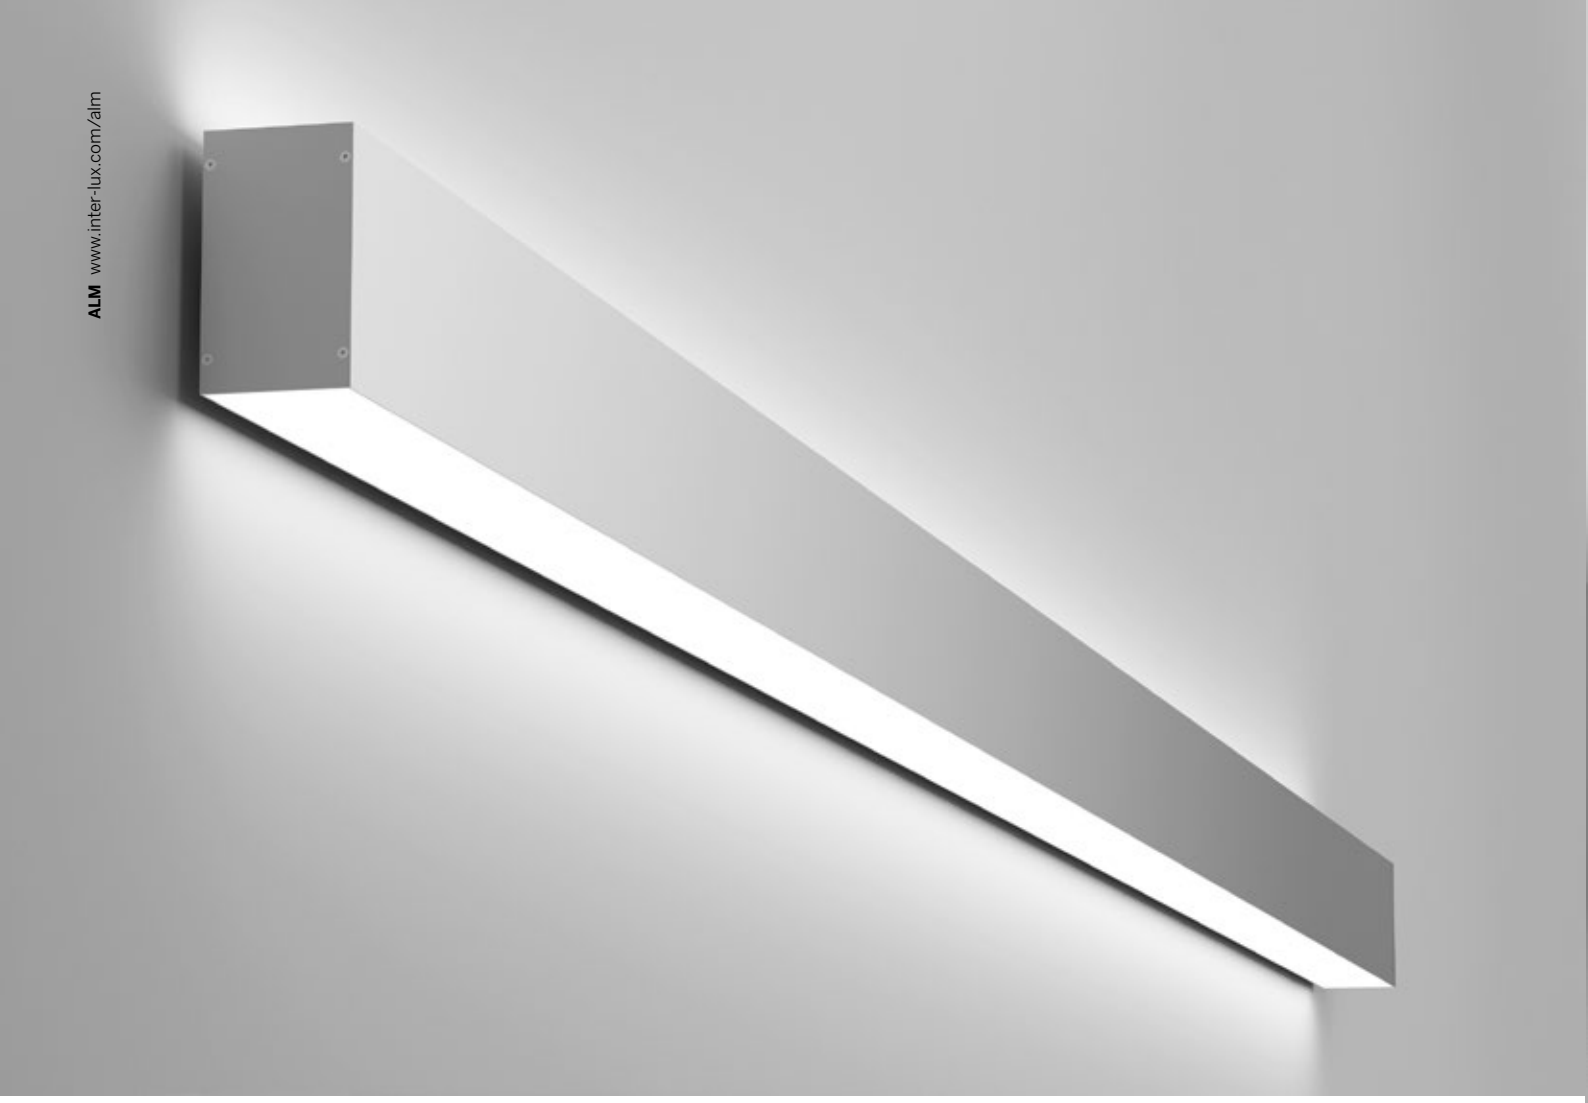

clearline

WALL SCONCE

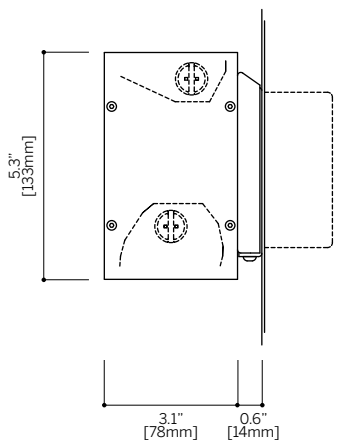

The ClearLine wall sconce is an elegant and refined option for direct and indirect illumination in offices or hallways.

Series	
CL2P	Pendant
CL2W	Wall
CL2S	Surface

*	Fixture Length
3	36″
4	48″
6	72″
8	96″
9	108″
10	120″
12	144″

*	Lamping
00	None
40	1 x 14 Watt / G5
402	2 x 14 Watt / G5
41	1 x 24 Watt HO / G5
412	2 x 24 Watt HO / G5
42	1 x 21 Watt /G5
422	2 x 21 Watt / G5
423	3 x 21 Watt / G5
424	4 x 21 Watt / G5
43	1 x 39 Watt HO / G5
432	2 x 39 Watt HO / G5
433	3 x 39 Watt HO / G5
434	4 x 39 Watt HO / G5
44	1 x 28 Watt / G5
442	2 x 28 Watt / G5
443	3 x 28 Watt / G5
444	4 x 28 Watt / G5
446	6 x 28 Watt / G5
448	8 x 28 Watt / G5
45	1 x 54 Watt HO / G5
452	2 x 54 Watt HO / G5
453	3 x 54 Watt HO / G5
454	4 x 54 Watt HO / G5
456	6 x 54 Watt HO / G5
458	8 x 54 Watt HO / G5

** Consult the factory for LED lamping options*

*	Diffuser
00	None
SA	Clear Satin Acrylic
SW	Satin White Opal Acrylic
CX	Extruder Aluminum Cover

*	Reflector
AR	Asymmetric Reflector
SR	Symmetric Reflector

*	Accent Downlight
00	NONE
80	1 x 50 Watt MR16 / GU5.3 **Please specify spacing and location*
91	1 x 39 Watt MR16, MH / GX10 **Please Specify spacing and location*
MS	Monopoint Steng Socket **Please specify spacing and location*

** Consult the factory for LED lamping options*

*	Suspension / Mounting
SM	Surface Mounted
C	Cable Suspension
S	Stem Suspension
WS	Wall Small Bracket

*	Cable Support / Power Feed
01	Option: WS-1
02	Option: WS-2

*	Cable Support
03	Option: S-1
04	Option: S-2

*	Voltage
1	120 Volts
2	277 Volts
U	120/277 Volts

*	Circuit
1	Single
2	Dual
3	Triple
D	Dimming
2D	Dual Dimming
EM	Emergency Ballast

*	Finish
16	Clear Anodized Aluminum
21	Painted White
22	Painted Custom Color

Series	Fixture Length	Uplight Lamping	Uplight Diffuser	Uplight Reflector	Downlight Lamping	Downlight Diffuser	Downlight Reflector	Accent Downlight	Suspension/ Mounting	Cable Support / Power Feed	Cable Support	Voltage	Circuit	Finish