

Warp



Light management: aluminum casing coated with **embossed** or **golden** effect

Passive heat dissipation: **die-cast aluminum** heat sink

Discreet aesthetics: the **thin flange** blends into the false ceiling









Photo-engraved screen with *F.O.L.*™ and a light-diffusing and protective function (for 15 and 25W models)




Optical compartment with an organic shape and embossed or “*warm & chic*” **golden finish**

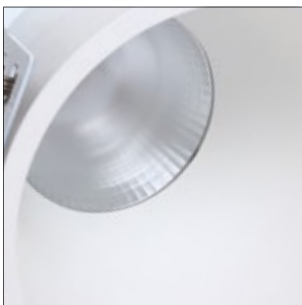


Warp Downlight - LED PowerLED 2 W 630 mA**Damp**  **C.C. IP44**  

type	color	lumens			optic
 E95700	4000K	165 lm	CRI 80	N	8° 08
 E95701	3500K	158 lm	CRI 80	T	15° 15
 E95703	3000K	154 lm	CRI 80	W	30° 30
	2700K	147 lm	CRI 80	M	45° 45

power supply options (remote only)

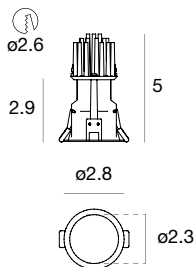
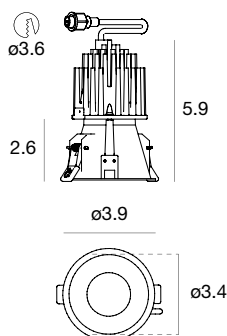

S	D010
Standard non-dim, 120-277V	1%, 0-10V dimming, 120-277V







Warp Downlight - LED PowerLEDs 8 W 630 mA**Damp** **C.C. IP44**   

type	color	lumens			optic
 E95704	4000K	627 lm	CRI 80	N	15° 15
 E95705	3500K	601 lm	CRI 80	T	30° 30
 E95707	3000K	570 lm	CRI 80	W	60° 60
	2700K	538 lm	CRI 80	M	

power supply options (remote only)

S	D010
Standard non-dim, 120-277V	1%, 0-10V dimming, 120-277V

Warp Downlight - LED Array 15 W 400 mA**Damp**  **C.C. IP44**  


type	color	lumens			optic
 E95708	4000K	1126 lm	CRI 83	N	15° 15
 E95709	3500K	1080 lm	CRI 83	T	30° 30
 E95711	3000K	1058 lm	CRI 83	W	60° 60
	2700K	978 lm	CRI 83	M	
 E95732	3000K	787 lm	CRI 95	W	15° 15
 E95733	2700K	723 lm	CRI 95	M	30° 30
 E95735					60° 60

power supply options (remote only)

S	D010
Standard non-dim, 120-277V	1%, 0-10V dimming, 120-277V

Warp Downlight - LED Array 25 W 720 mA

Damp  **C.C. IP44**  

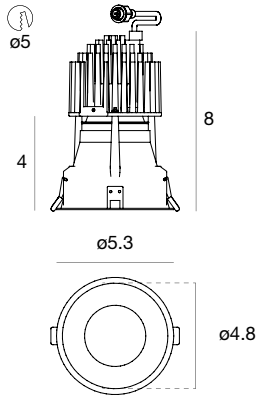

type	color	lumens				optic
White E95756	4000K	1855 lm	CRI 83	N	15° 15	
Black E95757	3500K	1780 lm	CRI 83	T	30° 30	
Gold E95759	3000K	1715 lm	CRI 83	W	60° 60	
	2700K	1673 lm	CRI 83	M		
White E95780	4000K	16484 lm	CRI 95	N	15° 15	
Black E95781	3000K	1413 lm	CRI 95	W	30° 30	
Gold E95783	2700K	1386 lm	CRI 95	M	60° 60	

power supply options (remote only)

S	D010
Standard non-dim, 120-277V	1%, 0-10V dimming, 120-277V