


# Silicone\_C

Flexible circuit **entirely covered in silicone**




60 LEDs per meter with **different power** and luminous intensity levels



The strip **may be folded or cut** into 6-LED units and wired to obtain the desired measure.

**Silicone\_C LED Strip - BASIC 60 LEDs/m**

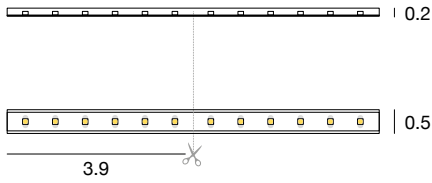


ETL wet location listed C.V. IP66

L inches		color	lumens		
39.4	4.8 W	2500 K	83 lm/ft	CRI 70	<b>E-98345</b>
196.9 (reel)	24 W	2500 K	83 lm/ft	CRI 70	<b>E-98346</b>


power supply options (remote only)

<b>S</b>	<b>D010</b>
Standard non-dim, 120-277V	1%, 0-10V dimming, 120-277V

accessories



**Silicone\_C LED Strip - HI-FLUX 60 LEDs/m**

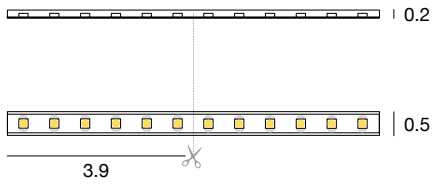

ETL wet location listed C.V. IP66

L inches		color	lumens		
39.4	14.4 W	2500 K	249 lm/ft	CRI 70	<b>E-98351</b>
196.9 (reel)	72 W	2500 K	249 lm/ft	CRI 70	<b>E-98352</b>


power supply options (remote only)

<b>S</b>	<b>D010</b>
Standard non-dim, 120-277V	1%, 0-10V dimming, 120-277V

accessories



**Corner profile** LED Strip

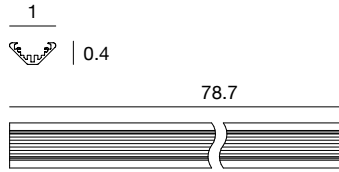

type suitable for  
Grey Ribbon, Dropper, Silicone Cased **E-98392**


Triangular section anodized aluminum profile for surface mounting.



**E-98393**  
 Side closing kit

**E-98394**  
 Snap-fit mounting kit

**Surface profile** LED Strip

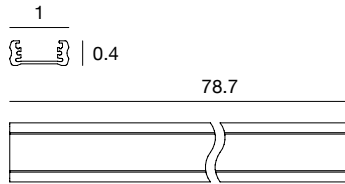

type suitable for  
Grey Ribbon, Dropper, Silicone Cased **E-98419**


Anodized aluminum profile for surface mounting.



**E-98418**  
 Side closing kit

**E-98420**  
 Snap-fit mounting kit

**Cover** LED Strip

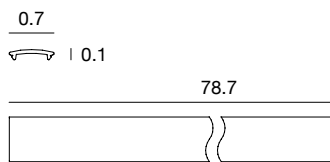

type suitable for  
Opaline Profiles E-98392, E-98419 **E-98395**

Opaline extruded polycarbonate diffuser (not compatible with the Silicone Cased strip).



IP66 extension cable with M connector for the monochromatic strip power supply cable.

connectors	suitable for
1 M	Silicone Mono

**E-89629**



IP66 extension cable with F connector for the monochromatic strip power supply cable.

connectors	suitable for
1 F	Silicone Mono

**E-99000**