

# U060 LIGHTWAY

## CUT-OFF WASHER / CEILING MOUNTED

# inter•lux

**U060** **CM** **WO** **XX** **-----**  
 Profile Mounting Optic Beam LED inserts

**40** **N** **I** **-----**  
 Dimming IP Body finish Emergency Layout Length

**Profile** **U060:** Profile 2.6 inch width  
**Mounting** **CM:** Ceiling mounted  
**Optic** **WO:** Cut-Off washer  
**Beam** **XX:** No beam angle  
**IP** **40:** IP40  
**Emergency** **N:** No emergency  
**Layout** **I:** Linear straight run

### LED inserts

(High-Power LED - Monocolor / CRI 80+)

Temperature	LED Model	Wattage (W/ft)	Lumen (lm/ft)
2700°K	827M1:	8.2 W/ft	626 lm/ft
	827M2:	11.9 W/ft	818 lm/ft
	827M3:	16.8 W/ft	1044 lm/ft
3000°K	830M1:	8.2 W/ft	648 lm/ft
	830M2:	11.9 W/ft	867 lm/ft
	830M3:	16.8 W/ft	1156 lm/ft
3500°K	835M1:	8.2 W/ft	688 lm/ft
	835M2:	11.9 W/ft	889 lm/ft
	835M3:	16.8 W/ft	1185 lm/ft

Total connected load (W/ft) - Delivered Lumen (lm/ft)

### Dimming

#### Integral driver

- C:** Non-Dim integral
- D:** Lutron - remote only
- E:** 0-10V dim integral

(Other dimming protocol are available upon request)

### Body Finish

- B:** Black
- W:** White
- G:** Gray


### Length (inch)

12 - 24 - 35 - 47 - 59 - 70 - 82 - 93 - 105

(For all 12 inch modules, driver is remote)


### Electrical Data

120 - 277V Power range

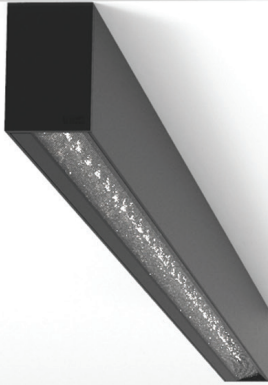

Highest wall illuminance up to 40' minimizes spill light  
 Setback ratio of 1:6  
 Continuous rows or individual fixtures  
 Install a min 4" from side walls to prevent spill light

Section drawing (inch)



### Notes

- Total connected load: including driver + LED power consumption

# VICE

410 381 1497 inter-lux.com answers@inter-lux.com  
 Inter-lux reserves the right to make technical changes without notice.

