

**IMPORTANT:** Fixture(s) must be wired in series! Refer to driver wiring document


Luminaires must be installed by a qualified electrician. Check with local and national codes for proper installation.



To prevent electrical shock disconnect electrical supply before installation or servicing.

**Never connect a live fixture!!!**

Contractor is responsible for adequately reinforcing walls and/or ceilings to support fixture weight. Provide blocking when necessary.

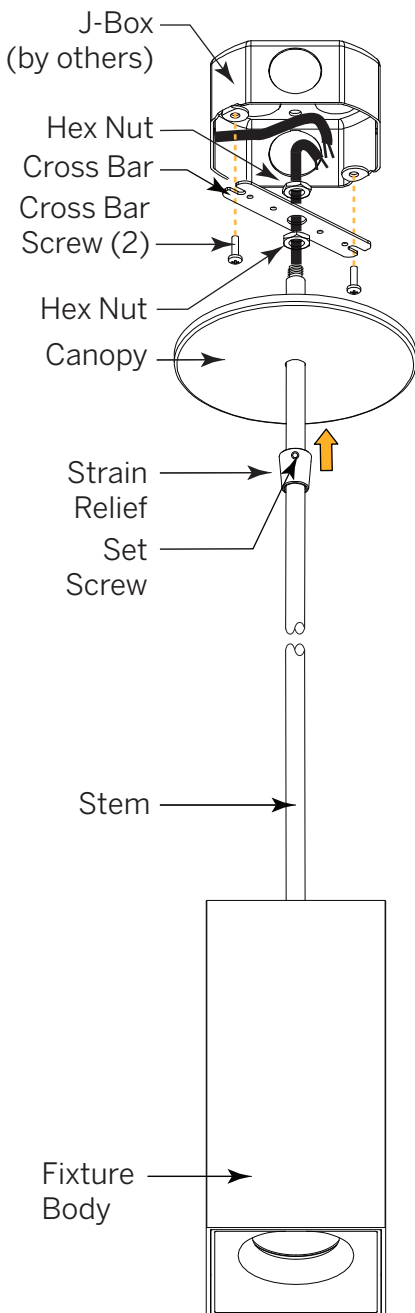

### Step 1

#### Confirm Power Supply is Off!

Unpack luminaire unit. Remote drivers and housings are supplied by Inter-lux.

### Step 2

#### Ceiling Preparation

Mark location, cut opening, and mount J-Box. Pull power (and control) cable(s) inside. Attach Cross Bar with supplied screws.

### Step 3

#### Mounting

- a** From Fixture Body, feed cable through stem. If stem supplied in multiple pieces, feed cable through first section and **then** through second section. Now join first to second. Repeat if needed.
- b** Screw Stem assembly to Fixture Body. Slide Strain Relief onto top of Stem. Follow with Canopy. Screw Hex Nut on top of Canopy.
- c** Screw top of Stem to Cross Bar, followed by Hex Nut to secure.

### Step 4

#### Connect Electricals & Secure

- a** Inside J-Box connect power (and control) cable(s) using suitable connectors.
- b** Slide Canopy and Strain Relief up the Stem to ceiling. Lock in place with Set Screw.

**Need Help?**

### Included in Box

- (1) Fixture Body with Integral Driver (or none, if remote driver specified) with connected cable.
- (1) Cross Bar
- (1) Cross Bar Screws
- (2) Hex Nuts
- (1-3) Stem(s) as specified
- (1) Canopy
- (1) Strain Relief with Set Screw

