

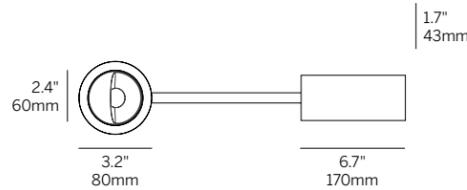


## 2.4" General Downlight Round Wall Wash

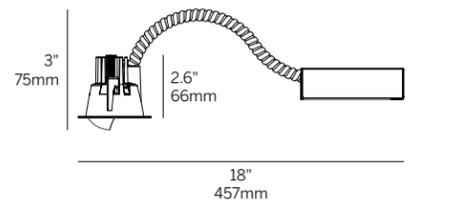


2.4" round aperture wall wash with semi-recessed kick reflector for wall wash applications.

<b>Housing</b>	Die-cast aluminum for precision fit and heat dissipation 3/8" bezel trim compatible with installation from below into ACT, drywall and hard ceilings Quick-screw mounting mechanism EZ-Click Cover installation
<b>Covers</b>	RSRWW - Round Semi-Recessed Wall Wash for semi-recessed room-side cutoff
<b>LED</b>	Constant Current, 80+ CRI (standard), 92 CRI, 2-Step MacAdam Low/Mid/High output choices (delivers up to 65 lumens per watt) 2700K, 3000K, 3500K, 4000K L70 (TM21 Projected 85° C) Static White = 55,400 hours
<b>Optics</b>	WW Wall Wash
<b>Driver</b>	Integral and remote drivers for all dimming and non-dimming applications 0-10V, Phase and Lutron driver options Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
<b>Installation Housing</b>	LP - Landing Pan NC - New Construction IC - Insulated Ceiling CP - Chicago Plenum X - No Housing (Optional)
<b>Warranty</b>	5-year Limited (see complete company warranty information)
<b>Certifications</b>	ETL and ETL-C for dry and damp location (WL Wet Location optional), CE

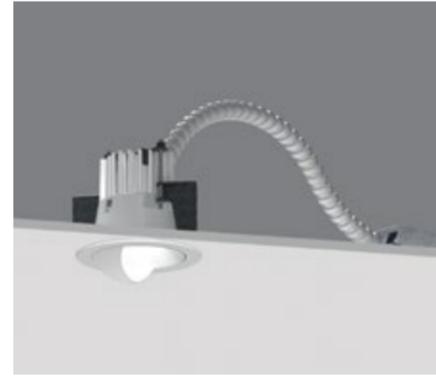

Standard housing

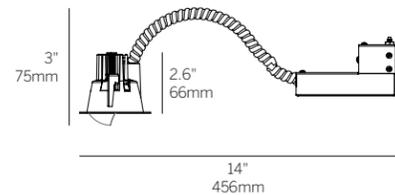

Shallow housing (SH)

## 2.4" General Downlight Round Wall Wash

Model	Fixation	Power <sup>1</sup>	CRI	CCT <sup>2</sup>	Driver <sup>3</sup>	Cover	Lens	Beam	Trim Finish	Cone Finish	Housing <sup>4</sup>	Options
WG-60RGDL	RBT	L M H	80 92	27 30 35 40	S010 SPH PEQ0 RS010 RD010 X	RSRWW	RSC	WW	W (std) S F	W (std) S F	LP NC IC CP X	WL SH EM AWNRF

### Model

- WG-60RGDL = 2.4" General Downlight Round Wall Wash

### Fixation

- RBT = Recessed Bezel Trim

### Power<sup>1</sup>

- L = Low power, 5.7W @ 350mA
- M = Mid power, 8.4W @ 500mA
- H = High power, 12W @ 700mA

### CRI

- 80 = 80 CRI (standard)
- 92 = 92 CRI

### CCT<sup>2</sup>

- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K

### Driver (Integral)<sup>3</sup>

- S010 = 0-10V 10% dimming, 120-277V (15W)
- SPH = Phase (2-wire) 3% dimming, 120V only (20W)
- PEQ0 = Lutron Hi-Lume Premier 0.1% EcoSystem dimming, 120-277V (20W)

### Driver (Remote)<sup>3</sup>

- RS010 = Remote eldoLED 0-10V 1% dimming, 120-277V (22W, 50W, or 100W)
- RD010 = Remote eldoLED 0-10V 0.1% dimming, 120-277V (22W, 50W or 100W)
- X = No driver

### Cover

- RSRWW = Round Semi-Recessed Wall Wash

### Lens

- RSC = Recessed Satin Clear

### Beam

- WW = Wall Wash

### Trim Finish

- W = White, 15% gloss, RAL 9003 (standard)
- S = Silver, 15% gloss, RAL 9006
- F = Custom finish, specify RAL

### Cover Finish

- W = White, 15% gloss, RAL 9003 (standard)
- S = Silver, 15% gloss, RAL 9006
- F = Custom finish, specify RAL

### Housing (Optional)<sup>4</sup>

- LP = Landing Pan
- NC = New Construction
- IC = Insulated Ceiling
- CP = Chicago Plenum
- X = No Housing

### Options

- WL = Wet Location
- SH = Reduces required plenum space to 3.5" (89mm)
- EM = Emergency (remote)
- AWNRF = Lutron Athena Wireless Node RF (RS010, RD010 drivers only)

Whitegoods reserves the right to change any information without prior notice.

### Notes

- Wattage shown does not include power supplies/drivers.
- See photometric data sheet for delivered lumens.
- See driver information for details.
- See housings page for details.