
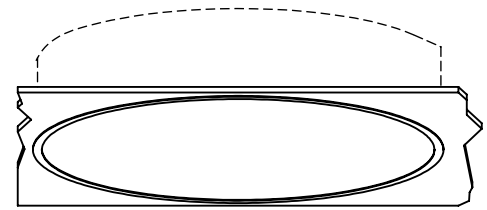


Plate T Specifications

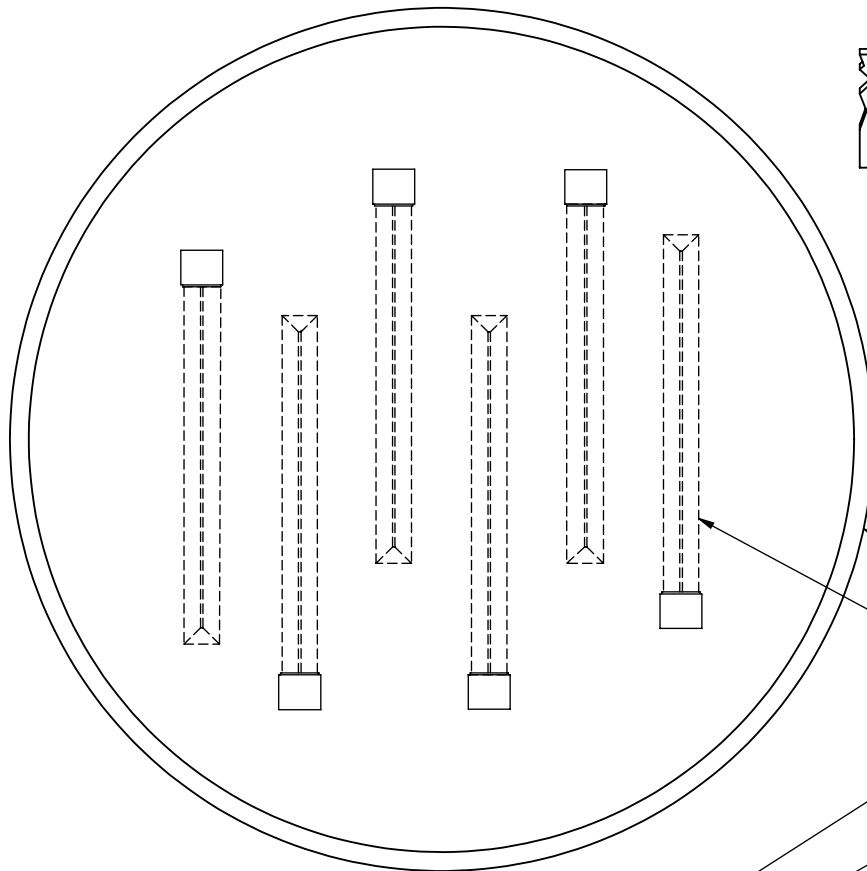

PERSPECTIVE VIEW

Trim Ring

Lamp Location
(Lamps By Others)

4" Octagon Box
(By Others)

Electrical Power
Feed (By Others)

1/4-20 Threaded Rod
To Structural Ceiling (4)
(By Others)

Light Body

Recessed Housing

Lamp Location
(Lamps By Others)

Ballast Location

Line of Finished Ceiling

Trim Ring

Bottom Diffuser

9.6"
[245mm]
8.0"
[203mm]

Ø36.0"
[914mm]

Series	Style	Lamp	Diffuser	Finish	Dia.	Voltage	Options
1360	R		SW		36		

R - Recessed
 196 - 6 x 36 Watt / 2G11
 205 - 5 x 40 Watt / 2G11
 206 - 6 x 40 Watt / 2G11

SW - Satin White
 Opal Acrylic

19 - Painted Anodized Aluminum
 21 - Painted White
 22 - Painted Custom Color

36"

U - 120-277 V
 1 - 120 V
 2 - 220-240 V
 3 - 277 V

DM - Specify Dimming Ballast
 Consult The Factory
 EM - Fluorescent Emergency,
 Battery - Remote
 Other _____

