Plate Plater-in Specifications

inter•lux
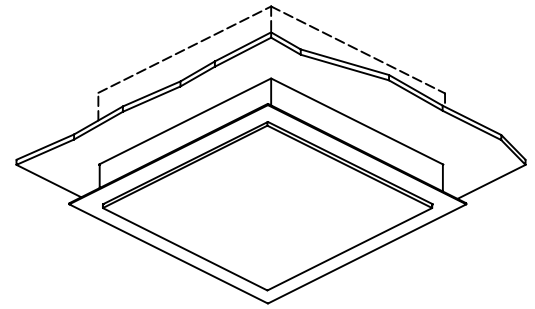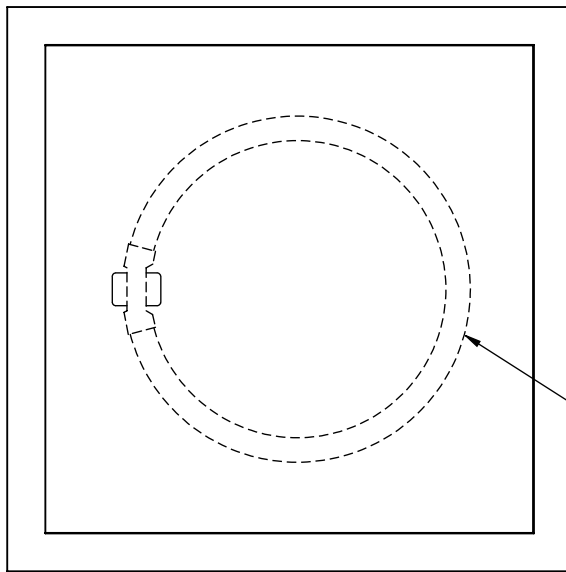
PERSPECTIVE VIEW

Lamp Location
(Lamp By Others)

1/4-20 Threaded Rod
To Structural Ceiling (4)
(By Others)

Electrical Power Feed
(By Others)

3.5"
[89mm]

1.8"
[46mm]

12.7"
[323mm]

14.7"
[374mm]

Recessed Housing

Diffuser Locking Spring

Line of Finished Ceiling

Plaster Flange

Side Diffuser

Satin Stainless Steel Frame

Bottom Diffuser
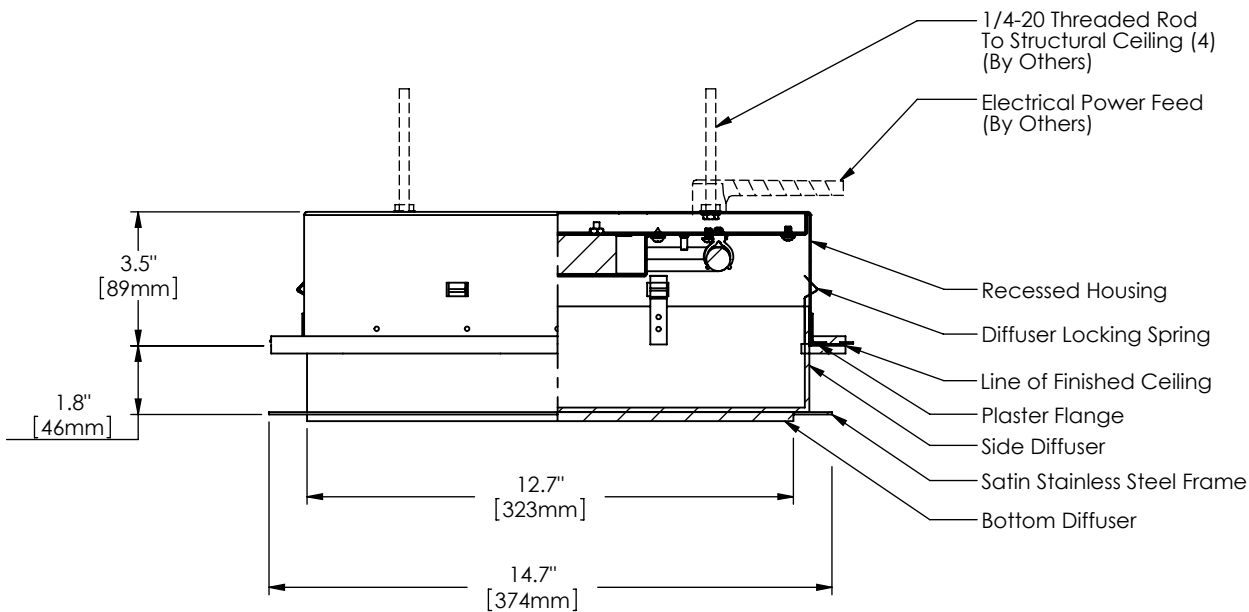
1366	R	33			10	14.7		
Series	Style	Lamp	Diffuser		Finish	Size	Voltage	Options
	R - Recessed	33 - 1 x 22 Watt / 2GX13	SW - Satin White Opal Acrylic	SA - Clear Satin Acrylic	10 - Satin Stainless Steel	14.7"	U - 120-277 V	DM - Specify Dimming Ballast Consult The Factory
							1 - 120 V	EM - Fluorescent Emergency, Battery - Remote
							2 - 220-240 V	Other _____
							3 - 277 V	

ALM

cETLus CE