


## DOPPIO DIRECT

Housing: Aluminum profile with integrated opal diffuser  
Design: SATTLER

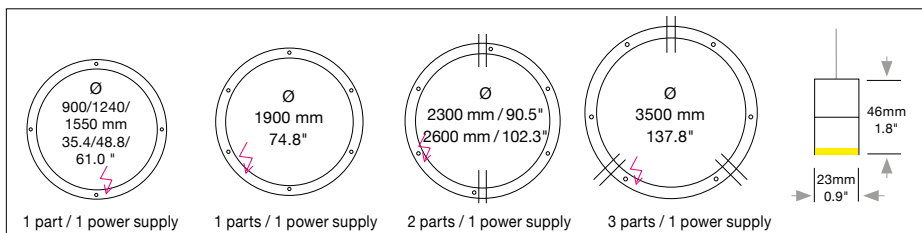

Sizes	Size: Ø mm	Inches	LED Watt	Lumen <sup>1</sup>	Weight kg/lbs <sup>2</sup>	Item No.	LED Direct	Dimming	LED Indirect	Finish	Power supply cable	Mounting version
	Ø 900 mm	35.4"	54	3177	3.7 / 8.12	<b>779.</b>	X X.	X X.	X X.	X X.	X X X.	X
	Ø 1240 mm	48.8"	70	4054	4.8 / 10.6	<b>780.</b>	X X.	X X.	X X.	X X.	X X X.	X
	Ø 1550 mm	61.0"	89	5132	5.5 / 12.1	<b>781.</b>	X X.	X X.	X X.	X X.	X X X.	X
	Ø 1900 mm	74.8"	107	6167	9.0 / 19.8	<b>782.</b>	X X.	X X.	X X.	X X.	X X X.	X
	Ø 2300 mm	90.5"	139	7961	10.0 / 22.0	<b>783.</b>	X X.	X X.	X X.	X X.	X X X.	X
	Ø 2600 mm	102.3"	160	9156	14.0 / 30.9	<b>784.</b>	X X.	X X.	X X.	X X.	X X X.	X
	Ø 3500 mm	137.8"	192	10,973	16.0 / 35.3	<b>785.</b>	X X.	X X.	X X.	X X.	X X X.	X

LED	Standard:	Warm-white	3000 K		X X X.	30.	X X.	X X.	X X.	X X X.	X
24V	Optional:	Natural-white	3500 K		X X X.	35.	X X.	X X.	X X.	X X X.	X
		Neutral-white	4000 K		X X X.	40.	X X.	X X.	X X.	X X X.	X
		Extra warm-white	2700 K		X X X.	27.	X X.	X X.	X X.	X X X.	X
		Tunable white*	2700 - 6500 K		X X X.	80.	X X.	X X.	X X.	X X X.	X

CRI > 90  
Mac Adam 3  
SELV  
L80 B10 100,000 hours

\*Only available with DMX.

Dimming	Standard:	0 - 10 V		X X X.	X X.	51.	00.	X X.	X X X.	X
	Optional:	Lutron EcoSystem <sup>A,G,R,K</sup>		X X X.	X X.	91.	00.	X X.	X X X.	X
		DMX		X X X.	X X.	31.	00.	X X.	X X X.	X

Finish	Standard:	12	white, powder coated, similar to RAL 9003	Optional (Powder coated):	10	black fine textured	11	white, similar to RAL 9010	30	anthracite fine textured	33	sand silver fine textured	34	bronze satined								
					35	gold	36	brass	37	bronze fine textured	38	copper										
				Optional (Premium):	22*	aluminum polished	27*	brush-finished aluminum	*22, 27	ring aluminum polished or brush-finished												

Power supply cable	Standard:	Z 70	silver	Optional:	Z 71	white	Z 73	black														

Without power cable

000  
Current-carrying F, R, T, K




410 381 1497 inter-lux.com answers@inter-lux.com  
inter-lux reserves the right to make technical changes without notice

IP 50 Light distribution direct Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08


Technical data is subject to change. Errors and omissions excepted 1. Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. 2. Weight of lights without remote technical unit or canopy.

## DOPPIO DIRECT


Housing: Aluminum profile with integrated opal diffuser  
Design: SATTLER

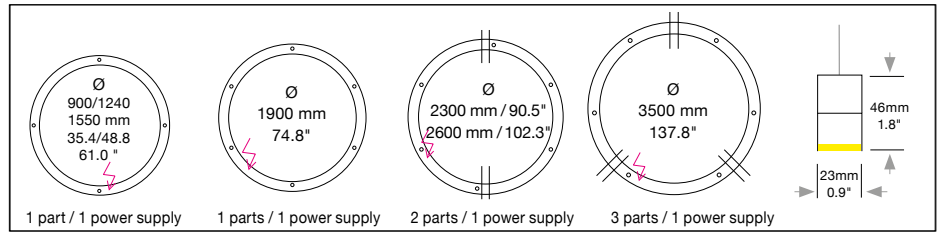


### Mounting version




up to Ø 1550 mm / 61.0"  
4-point suspension  
up to Ø 3500 mm / 137.8"  
6-point suspension  
with external power supply  
unit in suspended ceiling.




up to Ø 1550 mm / 61.0"  
4-point suspension  
up to Ø 3500 mm / 137.8"  
6-point suspension  
with external power supply  
unit in separate canopy.




up to Ø 1900 mm / 74.8"  
suspension through canopy.




up to Ø 1550 mm / 61.0" 4-  
current-carrying steel cables,  
up to Ø 1900 mm / 74.8" 6-  
current-carrying steel cables.  
Not in combination with RGB.




up to Ø 1900 mm / 74.8"  
Suspension with current-  
carrying steel cables and  
cavity wall box. Not in  
combination with RGB.




up to Ø 1900 mm / 74.8"  
Suspension with pendant  
canopy PB 375/PB 656  
and steel cables  
(a) 5000 mm / 196.8" +  
(b) 3000 mm / 118.1"  
25' ceiling height  
recommended.




up to Ø 1900 mm / 74.8"  
Suspension with pendant  
canopy PB 375/PB 656 and  
current-carrying steel cables.  
(a) 5000 mm / 196.8" +  
(b) 3000 mm / 118.1"  
Not in combination with RGB  
25' ceiling height  
recommended.



up to Ø 2600 mm / 102.3"  
Direct ceiling mounting  
50mm / 1.9" with external  
power supply unit in  
suspended ceiling.



up to Ø 2600 mm / 102.3"  
Direct ceiling mounting  
(white) 50mm / 1.9" with  
external power supply unit in  
separate canopy.



up to Ø 1900 mm / 74.8"  
Suspension point as  
clamping unit with 4/6 cables  
and remote technical unit in  
suspended ceiling.

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-

A, B, G, H, R = Distance of external power supply unit to light fixture max. 10m / 394".

E, F, S, T, K = Minimum suspension height is half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 3000mm/118" and/or power supply cable 3000mm/118" version S,T 5000 + 3000mm / 197"+118"

Complete order number


Power supply units:			
Type/ Size mm / inch	Included with Mounting version	Protective rating	
DE 1F 363x 143 x 56 mm / 14.2 x 5.6 x 2.2"	A,G,R,K (up to Ø 1550 mm)	IP 20	
DE 2F 363 x 283 x 56 mm / 14.2 x 11.1 x 3.3"	A,G,K (up to Ø 2600 mm)	IP 20	
DE 3F 363 x 283 x 56 mm / 14.2 x 11.1 x 3.3"	A (up to Ø 3500 mm)	IP 20	

Input voltage for all external power supply units and canopy is 120-277 VAC 50-60 Hz

Canopy:			
Type/ Size mm / inch	Included with Mounting version	Protective rating	
DB 290 Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B,E,F,H (up to Ø 1550 mm)	IP 20	
DB 350 Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B,E,H (up to Ø 2600 mm)	IP 20	
DB 510 Ø 510 / 470 / 60 mm / 20 x 18.5 / 2.3"	B (up to Ø 3500 mm)	IP 20	
PB 375 Ø 90 H 375mm / 3.5 x 14.8"	S,T (up to Ø 1550mm)	IP 20	
PB 656 Ø 90 H 656mm / 3.5 x 25.8"	S,T (up to Ø 1900 mm)	IP 20	
DB 145 Ø 145 / 133 / 55 mm / 5.7 x 5.2 / 2.2"	K (up to Ø 1900 mm)	IP 20	

Color: 12 white, similar RAL 9003, contact factory for other finishes  
Canopy mounts to 4" octagonal junction box.

### Optional



Power cable cover plate for mounting version A and G

200. 00. 00. 00. 12. (white)

Consisting of a cavity ceiling box with 3.1" (80mm) round metal cover. Included with mounting version A and G.