



DOPPIO LINEA
DIRECT / INDIRECT

Housing: Aluminum profile with integrated opal diffusers
Design: SATTLER

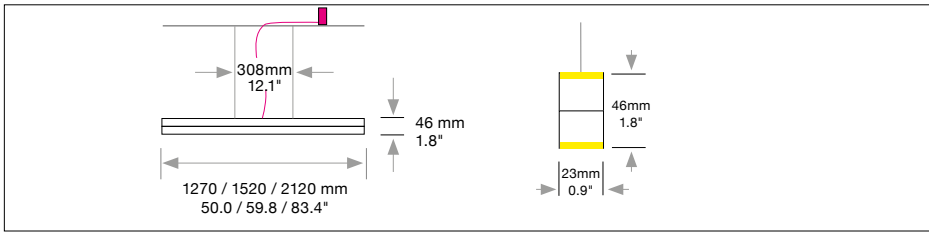

Sizes	Size: L x W mm	Inches	LED Watt direct / indirect	Lumen ¹ direct / indirect	Weight kg / lbs ²	Item No.	LED Direct	Dimming	LED Indirect	Finish supply	Power version cable	Mounting
	1270 mm	50.0"	23 / 9	1219 / 480	2.0 / 4.4	794.	X X.	X X.	X X.	X X.	X X X.	X
	1520 mm	59.8"	28 / 11	1489 / 587	2.5 / 5.5	795.	X X.	X X.	X X.	X X.	X X X.	X
	2120 mm	83.4"	39 / 15	2051 / 805	3.0 / 6.6	796.	X X.	X X.	X X.	X X.	X X X.	X

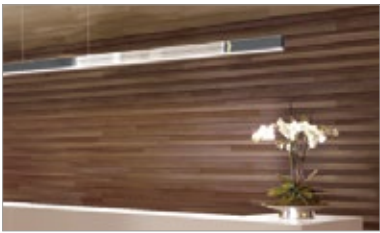

Single light, not mountable in row

Direct and indirect light are switchable and dimmable together only

Direct LED	Standard:	Warm-white	3000 K	X X X.	30.	X X.	X X.	X X.	X X X.	X
24V CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours	Optional:	Natural-white	3500 K	X X X.	35.	X X.	X X.	X X.	X X X.	X
		Neutral-white	4000 K	X X X.	40.	X X.	X X.	X X.	X X X.	X
		Extra warm-white	2700 K	X X X.	27.	X X.	X X.	X X.	X X X.	X

Indirect LED	Standard:	Warm-white	3000 K	X X X.	X X.	X X.	30.	X X.	X X X.	X
24V CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours Indirect light output is significantly lower than direct light output	Optional:	Natural-white	3500 K	X X X.	X X.	X X.	35.	X X.	X X X.	X
		Neutral-white	4000 K	X X X.	X X.	X X.	40.	X X.	X X X.	X
		Extra warm-white	2700 K	X X X.	X X.	X X.	27.	X X.	X X X.	X
		RGB Color control*		X X X.	X X.	X X.	60.	X X.	X X X.	X

Dimming	Standard:	0 - 10 V	X X X.	X X.	52.	X X.	X X.	X X X.	X
	Optional:	Lutron EcoSystem ^{A,R} DMX	X X X.	X X.	92.	X X.	X X.	X X X.	X
			X X X.	X X.	32.	X X.	X X.	X X X.	X

Finish	Standard:	12	white, powder coated, similar to RAL 9003	Optional (Powder coated):	10	black fine textured	11	white, similar to RAL 9010	32	crocodile black	33	sand silver fine textured	34	bronze satined	35	gold	36	brass	37	bronze fine textured	38	copper	Optional (Premium):	22	aluminum polished	27	brush-finished aluminum	X X X.	X X.	X X.	X X.	---	X X X.	X
--------	-----------	----	---	---------------------------	----	---------------------	----	----------------------------	----	-----------------	----	---------------------------	----	----------------	----	------	----	-------	----	----------------------	----	--------	---------------------	----	-------------------	----	-------------------------	--------	------	------	------	-----	--------	---

Power supply cable	Standard:	Z 70	silver	Optional:	Z 71	white	Z 73	black	X X X.	X X.	X X.	X X.	X X.	---	X

DOPPIO LINEA DIRECT / INDIRECT

7.2024



410 381 1497 inter-lux.com answers@inter-lux.com
inter-lux reserves the right to make technical changes without notice


IP 50 Direct / indirect light distribution Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08

Technical data is subject to change. Errors and omissions excepted 1. Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. 2. Weight of lights without remote technical unit or canopy.


DOPPIO LINEA DIRECT / INDIRECT




Housing: Aluminum profile with integrated opal diffusers
Design: SATTLER

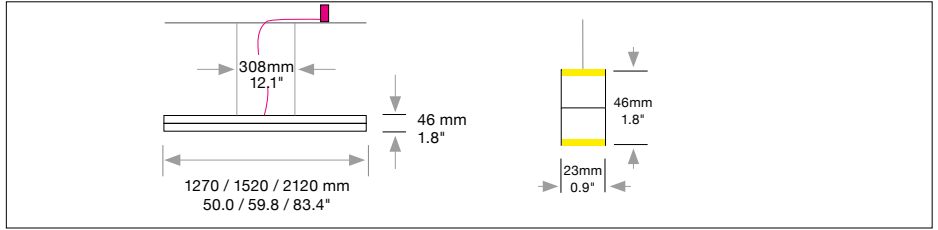


Mounting version




2-point suspension with external power supply unit in suspended ceiling.



Suspension through canopy.



Current-carrying steel cables. Not in combination with RGB.



Suspension with current-carrying steel cables and cavity wall box. Not in combination with RGB.

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-

A, R = Distance of external power supply unit to light fixture max. 10m / 394".

Including steel cable suspension 3000mm / 118.1"
or/and power supply cable 3000mm / 118.1"



---	---	---	---	---	---	---
-----	-----	-----	-----	-----	-----	-----


Complete order number

Power supply units:			
Type / Size mm / inch L x W x H	Included with Mounting version	Protective rating	
DE 1F 360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A,R	IP 20	
In combination with RGB			
DE 2F 360 x 300 x 85 mm / 14.2 x 11.8 x 3.3	A	IP 20	

Input voltage for all external power supply units and canopy is **120-277 VAC 50-60 Hz**

Canopy:			
Type/ Size mm / inch	Included with Mounting version	Protective rating	
DBL 390 L 390 x W 70 x H 70 mm L 15.4 x W 2.8 x H 2.8 mm	E, F	IP 10	
In combination with RGB:			
DBL 490 L 492 x W 70 x H 70 mm L 119.4 x W 2.8 x H 2.8 mm	E, F	IP 10	
Color: 12 white, similar RAL 9003, contact factory for other finishes			
Canopy mounts to 4" octagonal junction box.			

Optional



Power cable cover plate for mounting version A

200. 00. 00. 00. 12. (white)

Consisting of a cavity ceiling box with 3.1" (80mm) round metal cover. Included with mounting version A.

