
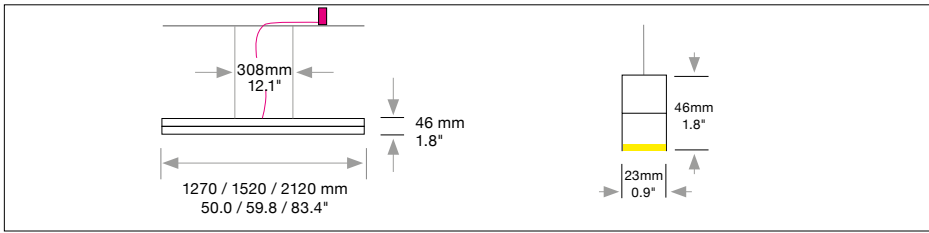


DOPPIO LINEA Direct

Housing: Aluminum profile with integrated opal diffuser
Design: SATTLER

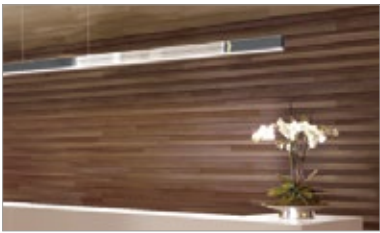


Sizes	Size: Length mm	Inches	LED Watt	Lumen ¹	Weigh kg/lbs ²	Item No.	LED Direct	Dimming	LED Indirect	Finish supply	Power version cable	Mounting
	1270 mm	50.0"	23	1219	2.0 / 4.4	794.	x x .	x x .	x x .	x x .	x x x .	x
	1520 mm	59.8"	28	1489	2.5 / 5.5	795.	x x .	x x .	x x .	x x .	x x x .	x
	2120 mm	83.4"	39	2051	3.0 / 6.6	796.	x x .	x x .	x x .	x x .	x x x .	x
<div style="display: flex; align-items: center;"> <div style="margin-right: 10px;"> <p>Direct</p> </div> <div> <p>Single lamp, not mountable in row</p> </div> </div>												
LED 24V CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours			Standard: Warm-white	3000 K		x x x .	30.	x x .	x x .	x x .	x x x .	x
	Optional:		Natural-white	3500 K		x x x .	35.	x x .	x x .	x x .	x x x .	x
			Neutral-white	4000 K		x x x .	40.	x x .	x x .	x x .	x x x .	x
			Extra warm-white	2700 K		x x x .	27.	x x .	x x .	x x .	x x x .	x
			Tunable white*	2700 - 6500 K		x x x .	80.	x x .	x x .	x x .	x x x .	x
*Only available with DMX.												
Dimming			Standard: 0 - 10 V			x x x .	x x .	51.	x x .	x x .	x x x .	x
	Optional:		Lutron EcoSystem ^{A,R}	DMX		x x x .	x x .	91.	x x .	x x .	x x x .	x
			x x x .			x x x .	x x .	31.	x x .	x x .	x x x .	x
Finish	Standard:			12 white, powder coated, similar to RAL 9003								
	Optional (Powder coated):			10 black fine textured								
				11 white, similar to RAL 9010								
				30 anthracite fine textured								
				33 sand silver fine textured								
				34 bronze satined								
				35 gold								
				36 brass								
				37 bronze fine textured								
				38 copper								
Optional (Premium):			22 aluminum polished		x x x .	x x .	x x .	x x .			x x x .	x
			27 brush-finished aluminum									
Power supply cable	Standard:			Z 70 silver								
	Optional:			Z 71 white								
				Z 73 black								
			000 Without power cable		x x x .	x x .	x x .	x x .	x x .			x
			Current-carrying F, R, T, K									


DOPPIO LINEA
Direct




Housing: Aluminum profile with integrated opal diffuser
Design: SATTLER

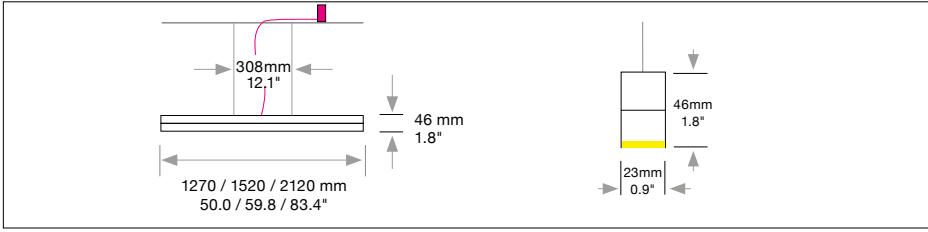


Mounting version




2-point suspension with external power supply unit in suspended ceiling.



suspension through canopy.



current-carrying steel cables. Not in combination with RGB.



Suspension with current-carrying steel cables and cavity wall box. Not in combination with RGB.

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, R = Distance of external power supply unit to light fixture max. 10m / 394".

Including steel cable suspension 3000mm / 118.1"
or/and power supply cable 3000mm / 118.1"



---	---	---	---	---	---	---
-----	-----	-----	-----	-----	-----	-----

Complete order number

Power supply units:

Type / Size mm / inch L x W x H	Included with Mounting version	Protective rating
DE 1F 360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A,R	IP 20

Canopy:


Type / Size mm / inch	Included with Mounting version	Protective rating
DBL 390 L 390 x W 70 x H 70 mm	F, E	IP 10

Color: 12 white, similar RAL 9003,
contact factory for other finishes

Canopy mounts to 4" octagonal junction box.

Input voltage for all external power supply units and canopy is **120-277 VAC 50-60 Hz**

Optional



Power cable cover plate for mounting version A

200. 00. 00. 00. 12. (white)

Consisting of a cavity ceiling box with 3.1" (80mm) round metal cover. Included with mounting version A.