





## DOPPIO LINEA DIRECT / INDIRECT




Housing: Aluminum profile with integrated acrylic  
Design: SATTLER

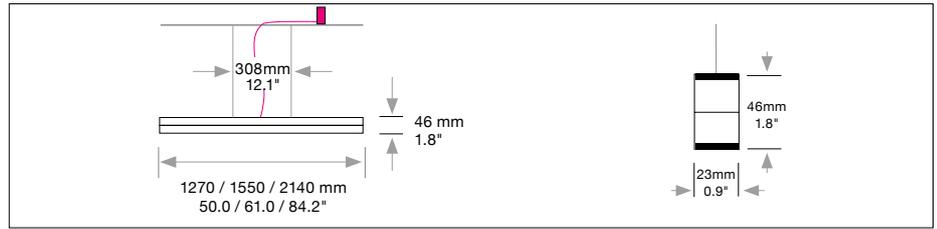


### Mounting Version




2-point suspension with external power supply unit in suspended ceiling



Suspension through canopy



Current-carrying steel cables. Not in combination with RGB



Suspension with current-carrying steel cables and cavity wall box. Not in connection with RGB.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, R = Distance of external power supply unit to light fixture max. 10m / 394".

Including steel cable suspension 2000mm / 78.7"  
or/and power supply cable 2000mm / 78.7"

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

**Dimensions of external power supply units**

Typ	Size mm / inch			For use with Mounting Version
	L	W	H	
<b>DE 1F</b>	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	<b>A, R</b>		
<b>In combination with RGB</b>				
<b>DE 2F</b>	360 x 300 x 85 mm / 14.2 x 11.8 x 3.3"	<b>A, R</b>		


**Dimensions of canopy**

Typ	Size mm / inch		For use with Mounting Version
	L	W	
<b>DBL 390</b>	up to Ø 2140 mm		<b>F / E</b>
	L 390 x W 70 x H 70 mm		
	L 15.3 x W 2.7 x H 2.7"		
<b>In combination with RGB</b>			
<b>DBL 490</b>	up to Ø 1550 mm		<b>E</b>
	L 492 x W 70 x H 70 mm		
	L 19.4 x W 2.7 x H 2.7"		

**Canopy finish: white (11)**  
contact factory for other finishes

USA/Canada: Canopy mounts to 4" single junction box.

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**



#### Power cable cover plate

(included with mounting version A)  
Ceiling opening box for power supply cable (80mm / 3.1" Ø round metal cover). White powder coated finish.

