


ELLIPSE half-shell


Housing: Aluminum profile with L-shaped opal diffuser
 Design: SATTLER

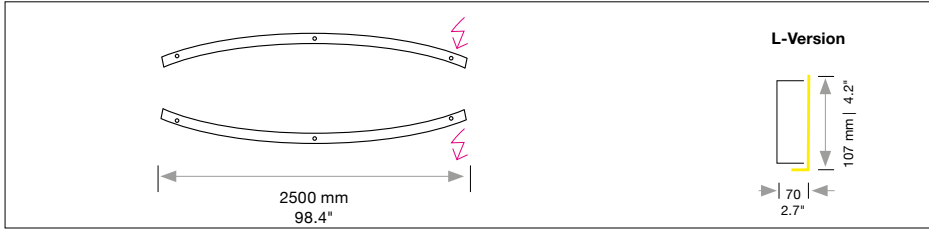


Sizes	Size: L x H mm	Inches	LED Watt	Lumen ¹	Weight kg / lbs ²	Item No.	LED Row 1	Dimming	LED Row 2	Finish	Power supply cable	Mounting version				
L-Version	2500 x 107	98.4 x 4.2	102	7507	17 / 37.5	240.	X X.	X X.	X X.	X X.	X X X.	X				
Consisting of 2 half-shells Further sizes on request																
LED 24V CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		Standard: Neutral-white	4000 K			X X X.	40.	X X.	X X.	X X.	X X X.	X				
		Optional:	Natural-white	3500 K			X X X.	35.	X X.	X X.	X X.	X X X.	X			
			Warm-white	3000 K			X X X.	30.	X X.	X X.	X X.	X X X.	X			
			Extra warm-white	2700 K			X X X.	27.	X X.	X X.	X X.	X X X.	X			
			Tunable white*	2700 - 6500 K			X X X.	80.	X X.	X X.	X X.	X X X.	X			
			RGB color control*				X X X.	60.	X X.	00.	X X.	X X X.	X			
	RGB + Neutral-White*	4000 K			X X X.	60.	X X.	40.	X X.	X X X.	X					
*Only available with DMX. Combinations up to two rows of LED possible.																
Dimming		Standard: 0 - 10 V				X X X.	X X.	51.	X X.	X X.	X X X.	X				
		Optional:	Lutron EcoSystem**			X X X.	X X.	91.	X X.	X X.	X X X.	X				
			DMX			X X X.	X X.	31.	X X.	X X.	X X X.	X				
First digit indicates Dimming protocol. Second digit indicates number of rows of LED. Codes shown with 1x row of LED (Standard). For 2x rows of LED replace the second digit accordingly. **Lutron EcoSystem driver must be ordered separately and remote mounted with mounting versions A, G.																
Finish		Standard: 12 white, powder coated, similar to RAL 9003	Optional (Powder coated):													
				10 black fine textured	11 white, similar to RAL 9010	30 anthracite fine textured	32 crocodile black	33 sand silver fine textured								
				34 bronze satined	35 gold	36 brass	37 bronze fine textured	38 copper								
				Optional (Premium):	22 aluminum polished	27 brush-finished aluminum										
									X X X.	X X.	X X.	X X.	---	X X X.	X	
				Power supply cable		Standard: Z 70 silver	Optional:									
								Z 71 white	Z 73 black							
						X X X.	X X.	X X.	X X.	X X.	---	X				

ELLIPSE half-shell


Housing: Aluminum profile with L-shaped opal diffuser
 Design: SATTLER

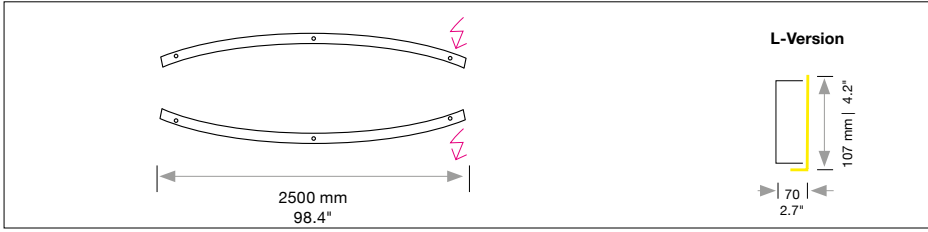


Mounting Version




6-point suspension with external power supply unit in suspended ceiling.



64-point suspension with external power supply unit in separate canopy.



Direct ceiling mounting 50 mm / 1.9" with external power supply unit in suspended ceiling.



Direct ceiling mounting (white) 50 mm / 1.9" with external power supply unit in separate canopy.

Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-

A, B, G, H = Distance of external power supply unit to light fixture max. 10m / 394"



-	-	-	-	-	-	-
---	---	---	---	---	---	---

Complete order number

Including steel cable suspension 5000 mm / 197" ; and/or power supply cable 5000 mm / 197"

Power supply units: (1 LED stripe)

Type / Size mm / inch L x W x H	Included with Mounting version	Protective rating
DE 2F 360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A, G	IP 20


Canopy: (1 LED stripe)

Type/ Size mm / inch Ø cover plate / body / H	Included with Mounting version	Protective rating
DB 350 Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, H	IP 20

Color: 12 white, similar RAL 9003, contact factory for other finishes
 Canopy mounts to 4" octagonal junction box.

Input voltage for all external power supply units and canopy is **120-277 VAC 47-63 Hz**

Optional



2X Ceiling fixation included with mounting versions A, G

200. 00. 00. 00. 12 (white)

Consisting of two cavity ceiling boxes with 80 mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A, G.