
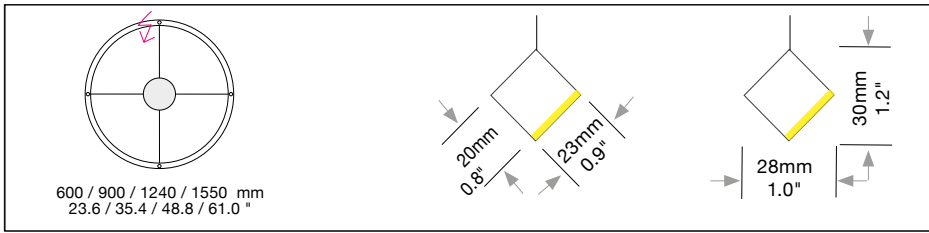


GIRATA  
Horizontal

Housing: Aluminum profile bent inwards 45°. Integrated opal diffuser  
Design: MARKUS BISCHOF

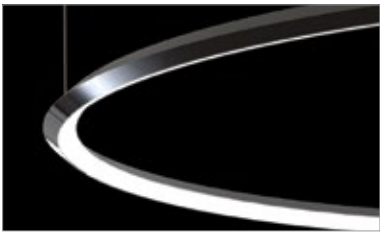

Size: Ø mm	Inches	LED Watt	Lumen <sup>1</sup>	Weight kg/lbs <sup>2</sup>	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Ø 600 mm	23.6"	32	1893	3.0 / 6.6	<b>895.</b>	x x.	x x.	x x.	x x.	x x x.	x
Ø 900 mm	35.4"	54	3179	3.5 / 7.7	<b>896.</b>	x x.	x x.	x x.	x x.	x x x.	x
Ø 1240 mm	48.8"	70	4109	5.0 / 11.0	<b>897.</b>	x x.	x x.	x x.	x x.	x x x.	x
Ø 1550 mm	61.0"	89	5186	5.5 / 12.1	<b>898.</b>	x x.	x x.	x x.	x x.	x x x.	x
<b>LED</b> 24V		<b>Standard:</b> Warm-white	<b>3000 K</b>		x x x.	<b>30.</b>	x x.	x x.	x x.	x x x.	x
CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		<b>Optional:</b> Natural-white	3500 K		x x x.	<b>35.</b>	x x.	x x.	x x.	x x x.	x
		Neutral-white	4000 K		x x x.	<b>40.</b>	x x.	x x.	x x.	x x x.	x
		Extra warm-white	2700 K		x x x.	<b>27.</b>	x x.	x x.	x x.	x x x.	x
<b>Dimming</b>		<b>Standard:</b> 0 - 10 V			x x x.	x x.	<b>51.</b>	<b>00.</b>	x x.	x x x.	x
		<b>Optional:</b> Lutron EcoSystem <sup>A,R,K</sup> DMX			x x x.	x x.	<b>91.</b>	<b>00.</b>	x x.	x x x.	x
					x x x.	x x.	<b>31.</b>	<b>00.</b>	x x.	x x x.	x
<b>Finish</b>		<b>Standard:</b> 12 white, powder coated, similar to RAL 9003	<b>Optional (Powder coated):</b> 10 black fine textured	11 white, similar to RAL 9010	30 anthracite fine textured	33 sand silver fine textured	34 bronze satined				
			35 gold	36 brass	37 bronze fine textured	38 copper					
		<b>Optional (Premium):</b> 22 aluminum polished	27 brush-finished aluminum								
					x x x.	x x.	x x.	x x.		x x x.	x
<b>Power supply cable</b>		<b>Standard:</b> Z 70 silver	<b>Optional:</b> Z 71 white	Z 73 black							
		<b>Without power cable</b>									
		<b>000</b> Current-carrying F, R, T, K			x x x.	x x.	x x.	x x.	x x.		x

GIRATA HORIZONTAL

7.2024



410 381 1497 inter-lux.com answers@inter-lux.com  
inter-lux reserves the right to make technical changes without notice




Light distribution direct




Conforms to UL-STD 1598  
Certified to CSA-STD C22.2  
No.250.0-08

Technical data is subject to change. Errors and omissions excepted 1. Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. 2. Weight of lights without remote technical unit or canopy.


## GIRATA Horizontal

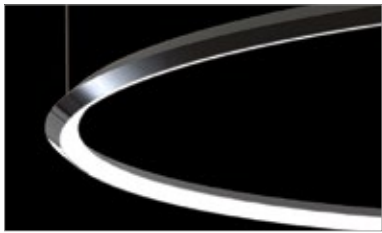


Housing: Aluminum profile bent inwards 45°. Integrated opal diffuser  
Design: MARKUS BISCHOF

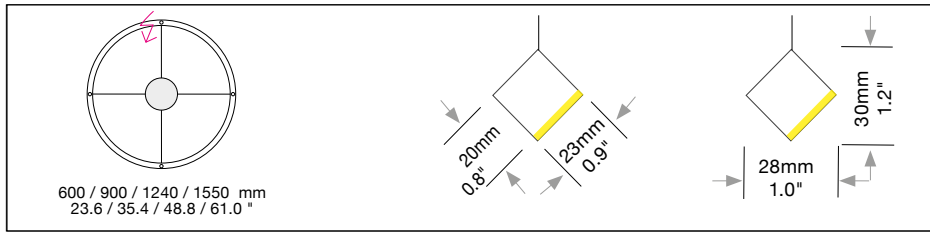


### Mounting version




up to Ø 1550 mm  
4-point suspension  
with external power supply  
unit in suspended ceiling.




up to Ø 1550 mm  
4-point suspension  
with external power supply  
unit in separate canopy.




Suspension through  
canopy.




4 current-carrying steel  
cables.




Suspension with current-  
carrying steel cables and  
cavity wall box.



Suspension with pendant  
canopy PB 375  
and steel cables  
(a) 5000 mm / 196.8" +  
(b) 3000 mm / 118.1" +  
25' ceiling height  
recommended.



Suspension with pendant  
canopy PB 375 and current-  
carrying steel cables.  
(a) 5000 mm / 196.8" +  
(b) 3000 mm / 118.1" +  
25' ceiling height  
recommended.



Suspension point as  
clamping unit with 4 cables  
and remote technical unit in  
suspended ceiling.

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-

**A, B, R, K** = Distance of external power supply unit to light fixture max. 10m / 394".

**S, T, K, E, F** = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 3000mm/118" and/or power supply cable 3000mm/118" version S,T 5000 + 3000mm / 197"+118"




Complete order number

Power supply unit:			
Type / Size mm / inch L x W x H	Included with Mounting version	Protective rating	
<b>DE 1F</b> 360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	<b>A, R, K</b>	<b>IP 20</b>	


Input voltage for all external power supply units and canopy is **120-277 VAC 50-60 Hz**

Canopy:			
Type / Size mm / inch Ø cover plate / body / H	Included with Mounting version	Protective rating	
<b>DB 290</b> Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	<b>B, E, F</b>	<b>IP 20</b>	
<b>PB 375</b> Ø 90 H 375 mm / 3.5 x 14.8"	<b>S, T</b>	<b>IP 20</b>	
<b>DB 145</b> Ø 145 / 133 / 55 mm / 5.7 x 5.2 / 2.2"	<b>K</b>	<b>IP 20</b>	



Color: **12 white, similar RAL 9003**,  
contact factory for other finishes  
Canopy mounts to 4" octagonal junction box.

### Optional



**Power cable cover plate for mounting version A**

**200. 00. 00. 00. 12.** (white)

Consisting of a cavity ceiling box with 3.1" (80mm) round metal cover. Included with mounting version A.