
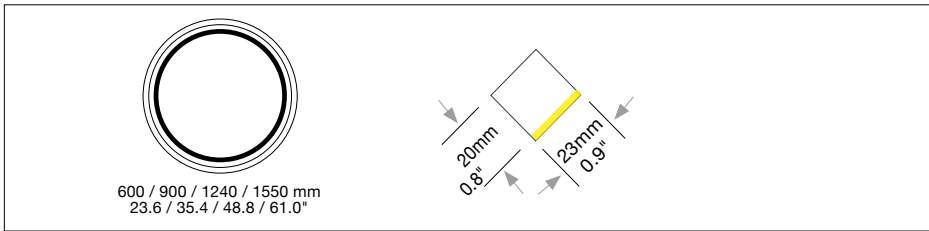


GIRATA  
Vertical

Housing: Circular Aluminum profile bent inwards 45°. Integrated opal diffuser.  
Design: MARKUS BISCHOF

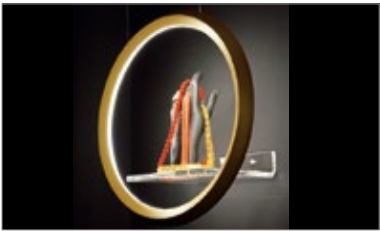

Size: Ø mm	Inches	LED Watt	Lumen <sup>1</sup>	Weight kg/lbs <sup>2</sup>	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Ø 600 mm	23.6"	32	1894	3.0 / 6.6	<b>901.</b>	x x.	x x.	x x.	x x.	x x x.	x
Ø 900 mm	35.4"	54	3178	3.5 / 7.7	<b>902.</b>	x x.	x x.	x x.	x x.	x x x.	x
Ø 1240 mm	48.8"	70	4104	5.0 / 11.0	<b>903.</b>	x x.	x x.	x x.	x x.	x x x.	x
Ø 1550 mm	61.0"	89	5190	5.5 / 12.1	<b>904.</b>	x x.	x x.	x x.	x x.	x x x.	x

<b>LED</b> 24V  CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		<b>Standard:</b> Warm-white <b>3000 K</b>	x x x.	<b>30.</b>	x x.	x x.	x x.	x x.	x x x.	x
		<b>Optional:</b> Natural-white      3500 K	x x x.	<b>35.</b>	x x.	x x.	x x.	x x x.	x	
		Neutral-white      4000 K	x x x.	<b>40.</b>	x x.	x x.	x x.	x x x.	x	
		Extra warm-white      2700 K	x x x.	<b>27.</b>	x x.	x x.	x x.	x x x.	x	

<b>Dimming</b>  	<b>Standard:</b> 0 - 10 V	x x x.	x x.	<b>51.</b>	<b>00.</b>	x x.	x x x.	x
	<b>Optional:</b> Lutron EcoSystem <sup>AR</sup> DMX	x x x.	x x.	<b>91.</b>	<b>00.</b>	x x.	x x x.	x

<b>Finish</b>  <b>Standard:</b>		<b>Optional (Powder coated):</b>						x x x.	x x.	x x.	x x.		x x x.	x		
	12 white, powder coated, similar to RAL 9003		10 black fine textured	11 white, similar to RAL 9010	30 anthracite fine textured	33 sand silver fine textured	34 bronze satined									
<b>Optional (Premium):</b>								x x x.	x x.	x x.	x x.		x x x.	x		
	35 gold	36 brass	37 bronze fine textured	38 copper												
										x x x.	x x.	x x.	x x.		x x x.	x
		22 aluminum polished	27 brush-finished aluminum													

<b>Power supply cable</b>  <b>Standard:</b>		<b>Optional:</b>			x x x.	x x.	x x.	x x.	x x.		x	
	Z 70 silver		Z 71 white	Z 73 black								
						x x x.	x x.	x x.	x x.	x x.		x
		000 Current-carrying F, R, T, K										

7.2024 GIRATA VERTICAL





410 381 1497 inter-lux.com answers@inter-lux.com  
inter-lux reserves the right to make technical changes without notice

Light distribution inwards  
 Conforms to UL-STD 1598  
 Certified to CSA-STD C22.2  
 No.250.0-08


Technical data is subject to change. Errors and omissions excepted 1. Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. 2. Weight of lights without remote technical unit or canopy.

GIRATA  
Vertical


Housing: Circular Aluminum profile bent inwards 45°. Integrated opal diffuser.  
Design: MARKUS BISCHOF

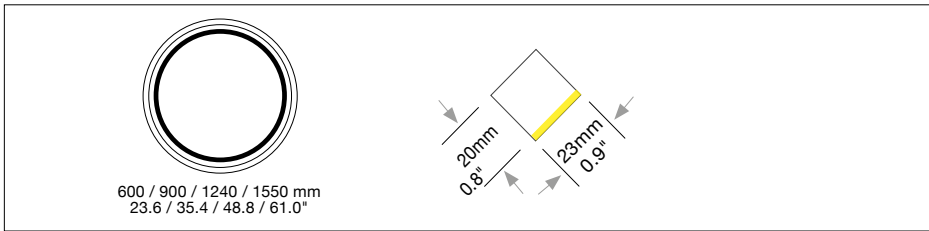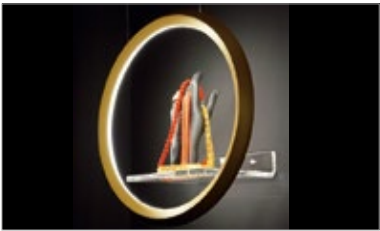


Mounting version




2 point suspension, with external power supply unit in suspended ceiling.



Suspension through canopy.



Current-carrying steel cables.



Suspension with current-carrying steel cables and cavity wall box.

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-

A, R = Distance of external power supply unit to light fixture max. 10m / 394".

Including steel cable suspension 3000mm/118" and/or power supply cable 3000mm/118"



---	---	---	---	---	---	---
-----	-----	-----	-----	-----	-----	-----

Complete order number

**Power supply unit:**

Type / Size mm / inch L x W x H	Included with Mounting version	Protective rating
DE 1F 360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A,R	IP 20


Input voltage for all external power supply units and canopy is 120-277 VAC 50-60 Hz

**Canopy:**

Type/ Size mm / inch Ø cover plate / body / H	Included with Mounting version	Protective rating
DBL 390 L 390 x B 70 x H 70 mm L 15.3 x B 2.7 x H 2.7"	E, F (up to Ø 1240 mm)	IP 10
DBL 490 L 490 x B 70 x H 70 mm L 19.4 x B 2.7 x H 2.7"	E, F (up to Ø 1240 mm)	IP 10

**Color: 12 white, similar RAL 9003**, contact factory for other finishes  
Canopy mounts to 4" octagonal junction box.

Optional



Power cable cover plate for mounting version A

200. 00. 00. 00. 12. (white)

Consisting of a cavity ceiling box with 3.1" (80mm) round metal cover. Included with mounting version A.

