


SLIM INDIRECT


Housing: Aluminum profile with integrated opal diffuser
 Design: SATTLER

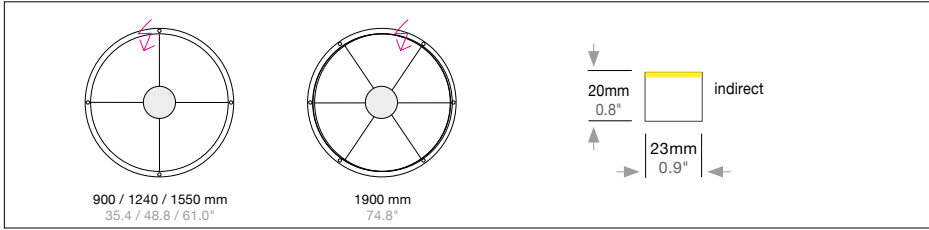


Sizes	Size: Ø mm	Inches	LED Watt	Lumen ¹	Weight kg/lbs ²	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
	Ø 380 mm	15.0"	22	1269	2.5 / 5.5	703.	X X .	X X .	X X .	X X .	X X X .	X
	Ø 600 mm	23.6"	32	2192	3.0 / 6.6	704.	X X .	X X .	X X .	X X .	X X X .	X
	Ø 900 mm	35.4"	54	3196	3.5 / 7.7	705.	X X .	X X .	X X .	X X .	X X X .	X
	Ø 1240 mm	48.8"	70	4117	5.0 / 11.0	706.	X X .	X X .	X X .	X X .	X X X .	X
	Ø 1550 mm	61.0"	89	5213	5.5 / 12.1	707.	X X .	X X .	X X .	X X .	X X X .	X
	Ø 1900 mm	74.8"	107	6349	6.0 / 13.2	708.	X X .	X X .	X X .	X X .	X X X .	X
LED 24V CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		Standard: Warm-white 3000 K		X X X .	30.	X X .	X X .	X X .	X X .	X X X .	X	
		Optional: Natural-white 3500 K		X X X .	35.	X X .	X X .	X X .	X X .	X X X .	X	
		Neutral-white 4000 K		X X X .	40.	X X .	X X .	X X .	X X .	X X X .	X	
		Extra warm-white 2700 K		X X X .	27.	X X .	X X .	X X .	X X .	X X X .	X	
		Tunable white* 2700 - 6500 K		X X X .	80.	X X .	X X .	X X .	X X .	X X X .	X	
RGB Color control*		X X X .	60.	X X .	00.	X X .	X X .	X X .	X X X .	X		
*only in combination with DMX												
Dimming		Standard: 0 - 10 V		X X X .	X X .	51.	00.	X X .	X X X .	X		
		Optional: Lutron EcoSystem ^{A,G,R,K} DMX		X X X .	X X .	91.	00.	X X .	X X X .	X		
				X X X .	X X .	31.	00.	X X .	X X X .	X		
Finish		Standard: 12 white, powder coated, similar to RAL 9003										
		Optional (Powder coated):		10 black fine textured	11 white, similar to RAL 9010	30 anthracite fine textured	33 sand silver fine textured	34 bronze satined				
			35 gold	36 brass	37 bronze fine textured	38 copper						
		Optional (Premium):	22 aluminum polished	27 brush-finished aluminum								
					X X X .	X X .	X X .	X X .	X X .	X X X .	X	
Power supply cable		Standard: Z 70 silver										
		Optional: Z 71 white Z 73 black										
		Without power cable										
		000 Current-carrying F, R, T, K										
					X X X .	X X .	X X .	X X .	X X .	X X X .	X	

SLIM INDIRECT


Housing: Aluminum profile with integrated opal diffuser
Design: SATTLER

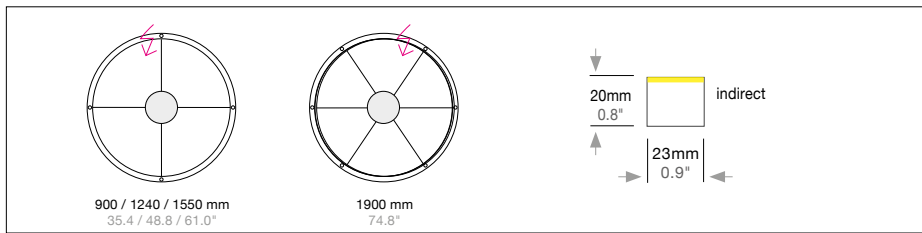


Mounting version




up to Ø 1550 mm / 61.0"
4-point suspension
Ø 1900 mm / 74.8"
6-point suspension with external power supply unit in suspended ceiling.




up to Ø 1550 mm / 61.0"
4-point suspension
Ø 1900 mm / 74.8"
6-point suspension with external power supply unit in separate canopy.




Suspension through canopy.




4/6 current-carrying steel cables. Not in combination with RGB.




Suspension with current-carrying steel cables and cavity wall box. Not in combination with RGB.




Suspension with pendant canopy PB 375 / PB 656 and steel cables
(a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" 25' ceiling height recommended.



Suspension with pendant canopy PB 375 / PB 656 and current-carrying steel cables.
(a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" Not in combination with RGB. 25' ceiling height recommended.



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Suspension point as clamping unit with 4/6 cables and remote technical unit in suspended ceiling. Not in combination with RGB

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-

---	---	---	---	---	---	-
-----	-----	-----	-----	-----	-----	---

Complete order number

A, B, G, R, K = Distance of external power supply unit to light fixture max. 10m / 394".

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 3000mm/118" and/or power supply cable 3000mm/118" version S,T 5000 + 3000mm / 197"+118"


Power supply unit:		Type / Size mm / inch L x W x H	Included with Mounting version	Protective rating
	DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A, G, R, K (up to Ø 1550 mm)	IP 20
	DE 2F	360 x 300 x 85 mm / 14.2 x 11.8 x 3.3"	A, G, R, K (up to Ø 1900 mm)	IP 20

Canopy:		Type / Size mm / inch Ø cover plate / body / H	Included with Mounting version	Protective rating
	DB 230	Ø 230 / 210 / 60 mm / 9.5 / 8.3 / 2.3"	B, E, F (up to Ø 900 mm)	IP 20
	DB 290	Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F, H (up to Ø 1550 mm)	IP 20
	DB 350	Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, E, F, H (up to Ø 1900 mm)	IP 20
	PB 375	Ø 90 H 375 mm / 3.5 x 14.8"	S, T (up to Ø 1550 mm)	IP 20
	PB 656	Ø 90 H 656 mm / 3.5 x 25.8"	S, T (up to Ø 1900 mm)	IP 20
	DB 145	Ø 145 / 133 / 55 mm / 5.7 x 5.2 / 2.2"	K	IP 20

Input voltage for all external power supply units and canopy is 120-277 VAC 50-60 Hz

Color: 12 white, similar RAL 9003,
contact factory for other finishes
Canopy mounts to 4" octagonal junction box.

Optional



Ceiling fixation included with mounting version A, G

200. 00. 00. 00. 12. (white)

Consisting of a cavity ceiling box with 3.1" (80mm) round metal cover. Included with mounting version A, G.