


SLIM OUT

Housing: Aluminum profile with integrated opal diffuser
 Design: SATTLER



Luminaire similar to photo

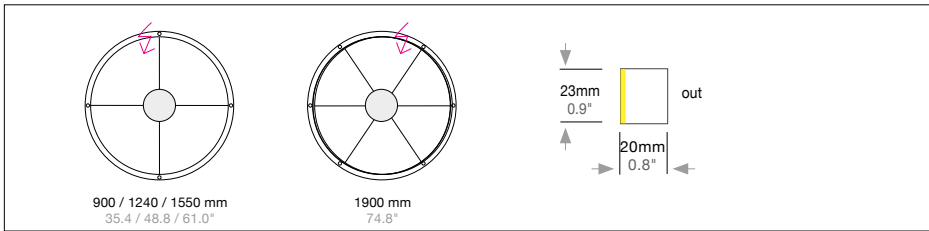


Size: Ø mm	Inches	LED Watt	Lumen ¹	Weight kg/lbs ²	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version											
Ø 900 mm	35.4"	51	2935	3.5 / 7.7	723.	x x .	x x .	x x .	x x .	x x x .	x											
Ø 1240 mm	48.8"	71	4186	5.0 / 11.0	724.	x x .	x x .	x x .	x x .	x x x .	x											
Ø 1550 mm	61.0"	88	5243	5.5 / 12.1	725.	x x .	x x .	x x .	x x .	x x x .	x											
Ø 1900 mm	74.8"	108	6414	6.0 / 13.2	726.	x x .	x x .	x x .	x x .	x x x .	x											
LED 24V		Standard: Warm-white	3000 K		x x x .	30.	x x .	x x .	x x .	x x x .	x											
CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		Optional:	Natural-white Neutral-white Extra warm-white Tunable white* RGB Color control*	3500 K 4000 K 2700 K 2700 - 6500 K	x x x . x x x . x x x . x x x . x x x .	35. 40. 27. 80. 60.	x x . x x . x x . x x . x x .	x x . x x . x x . x x . x x .	x x . x x . x x . x x . x x .	x x x . x x x . x x x . x x x . x x x .	x x x x x											
Dimming		Standard: 0 - 10 V			x x x .	x x .	51.	00.	x x .	x x x .	x											
		Optional:	Lutron EcoSystem ^{A,G,R,K} DMX		x x x . x x x .	x x . x x .	91. 31.	00. 00.	x x . x x .	x x x . x x x .	x x											
Finish		Standard:	12 white, powder coated, similar to RAL 9003	Optional (Powder coated):		10 black fine textured		11 white, similar to RAL 9010		30 anthracite fine textured		33 sand silver fine textured		34 bronze satined								
						35 gold		36 brass		37 bronze fine textured		38 copper										
		Optional (Premium):				22 aluminum polished		27 brush-finished aluminum								x x x .	x x .	x x .	x x .		x x x .	x
Power supply cable		Standard:	Z 70 silver	Optional:		Z 71 white		Z 73 black														
			000 Current-carrying F, R, T, K												x x x .	x x .	x x .	x x .	x x .		x x x .	x

SLIM OUT

Housing: Aluminum profile with integrated opal diffuser
 Design: SATTLER



Luminaire similar to photo

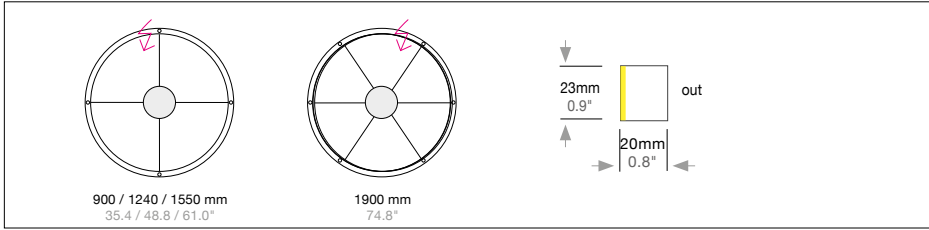

Mounting version

			Standard 		
up to Ø 1550 mm / 61.0" 4-point suspension 1900 mm / 74.8" 6-point suspension with external power supply unit in suspended ceiling	up to Ø 1550 mm / 61.0" 4-point suspension 1900 mm / 74.8" 6-point suspension with external power supply unit in separate canopy	suspension through canopy	4/6 current-carrying steel cables. Not in combination with RGB	Suspension with current-carrying steel cables and cavity wall box. Not in combination with RGB.	Suspension with pendant canopy PB 375 / PB 656 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1". 25' ceiling height recommended.
Suspension with pendant canopy PB 375 / PB 656 and current-carrying steel cables. (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1". Not in combination with RGB. 25' ceiling height recommended.	Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling	Suspension point as clamping unit with 4 cables and remote technical unit in suspended ceiling. Not in combination with RGB.			

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	- .

Complete order number

---	---	---	---	---	---	---
-----	-----	-----	-----	-----	-----	-----

A, B, G, R, K = Distance of external power supply unit to light fixture max. 10m / 394".

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 3000mm/118" and/or power supply cable 3000mm/118" version S,T 5000 + 3000mm / 197"+118"

Power supply unit:

Type / Size mm / inch	Included with Mounting version	Protective rating
DE 1F 360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A,G,R,K (up to Ø 1550 mm)	IP 20
DE 2F 360 x 300 x 85 mm / 14.2 x 11.8 x 3.3"	A,G,R,K (up to Ø 1900 mm)	IP 20


Input voltage for all external power supply units and canopy is 120-277 VAC 50-60 Hz

Canopy:

Type/ Size mm / inch	Included with Mounting version	Protective rating
DB 230 Ø 230 / 210 / 60 mm / 9.5 / 8.3 / 2.3"	B, E, F (up to Ø 900 mm)	IP 20
DB 290 Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F, H (up to Ø 1550 mm)	IP 20
DB 350 Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, E, F (up to Ø 1900 mm)	IP 20
PB 375 Ø 90 H 375 mm / 3.5 x 14.8"	S, T (up to Ø 1550 mm)	IP 20
PB 656 Ø 90 H 656 mm / 3.5 x 25.8"	S, T (up to Ø 1900 mm)	IP 20

Color: 12 white, similar RAL 9003, contact factory for other finishes
 Canopy mounts to 4" octagonal junction box.

Optional



Power cable cover plate for mounting version A, G 200. 00. 00. 00. 12. (white)
 Consisting of a cavity ceiling box with 3.1" (80mm) round metal cover. Included with mounting version A, G.