


SLIM WALL


Housing: Aluminum profile with integrated opal diffuser  
 Design: SATTLER

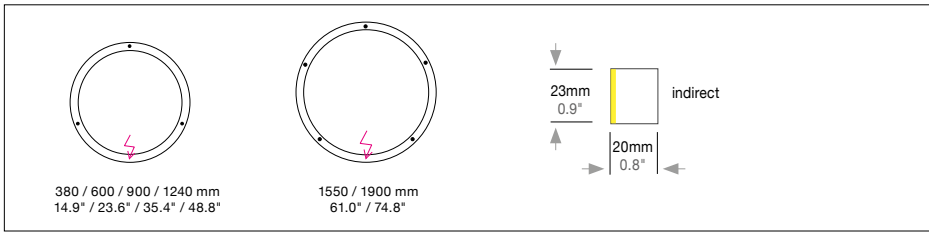

	Size: Ø mm	Inches	LED Watt	Lumen <sup>1</sup>	Weight kg/lbs <sup>2</sup>	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version	
<b>Sizes</b>	Ø 380 mm	14.9"	9	505	1.0 / 2.2	<b>727.</b>	x x x.	x x.	x x.	x x.	x x x.	x x	
	Ø 600 mm	23.6"	13	875	1.0 / 2.2	<b>728.</b>	x x.	x x.	x x.	x x.	x x x.	x x	
	Ø 900 mm	35.4"	22	1276	1.5 / 3.3	<b>729.</b>	x x.	x x.	x x.	x x.	x x x.	x x	
	Ø 1240 mm	48.8"	28	1620	2.5 / 5.5	<b>730.</b>	x x.	x x.	x x.	x x.	x x x.	x x	
	Ø 1550 mm	61.0"	37	2109	3.0 / 6.6	<b>731.</b>	x x.	x x.	x x.	x x.	x x x.	x x	
	Ø 1900 mm	74.8"	43	2537	3.5 / 7.7	<b>732.</b>	x x.	x x.	x x.	x x.	x x x.	x x	
<b>LED</b> 24V  CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		<b>Standard:</b> Warm-white	3000 K			x x x.	<b>30.</b>	x x.	x x.	x x.	x x x.	x x	
		<b>Optional:</b>	Natural-white	3500 K			x x x.	<b>35.</b>	x x.	x x.	x x.	x x x.	x
		Neutral-white	4000 K			x x x.	<b>40.</b>	x x.	x x.	x x.	x x.	x x x.	x x
		Extra warm-white	2700 K			x x x.	<b>27.</b>	x x.	x x.	x x.	x x x.	x x	
<b>Dimming</b>		<b>Standard:</b> 0 - 10 V				x x x.	x x.	<b>51.</b>	<b>00.</b>	x x.	x x x.	x	
		<b>Optional:</b>	Lutron EcoSystem DMX				x x x.	x x.	<b>91.</b>	<b>00.</b>	x x.	x x x.	x
						x x x.	x x.	<b>31.</b>	<b>00.</b>	x x.	x x x.	x	
<b>Finish</b>	<b>Standard:</b>		12 white, powder coated, similar to RAL 9003										
		<b>Optional (Powder coated):</b>		11 white, similar to RAL 9010		10 black fine textured		30 anthracite fine textured		33 sand silver fine textured		34 bronze satined	
			35 gold		36 brass		37 bronze fine textured		38 copper				
	<b>Optional (Premium):</b>		22 aluminum polished		27 brush-finished aluminum								
						x x x.	x x.	x x.	x x.	--	x x x.	x x	
<b>Power supply cable</b>		<b>Standard</b>	Z 80 black matte										
											--	x x	
						x x x.	x x.	x x.	x x.	x x.	--	x x	

SLIM WALL

Housing: Aluminum profile with integrated opal diffuser  
 Design: SATTLER

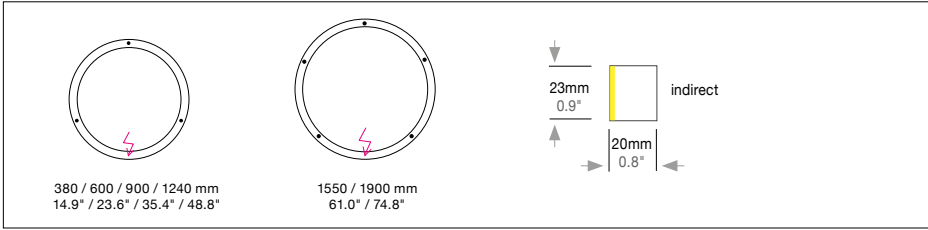

Mounting version	Diagram	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
<b>Ⓚ Wall bracket</b> 85 mm / 3.3" (white)		Standard	x x x.	x x.	x x.	x x.	x x x.	<b>K</b> x
<b>Ⓝ Wall bracket</b> 115 mm / 4.5" (white)		Optional	x x x.	x x.	x x.	x x.	x x x.	<b>J</b> x
<b>Ⓞ Remote power supply for intermediate wall</b>		Standard	x x x.	x x.	x x.	x x.	x x x.	x <b>W</b>

Wall brackets in white. Upon request in Aluminum polished.

Complete order number

Power supply unit:		Type / Size mm / inch	For use with	Protective rating
		L x W x H	Mounting version	
	<b>DE 1F</b> 360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	<b>W</b>	<b>IP 20</b>	

Input voltage for all external power supply units and canopy is **120-277V VAC 47-63 Hz**