
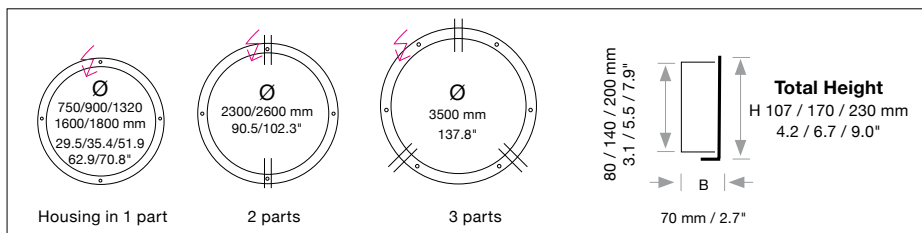


CIRCOLO

Housing: Circular aluminum profile, opal acrylic diffuser on the inside
 Design: SATTLER, Patented

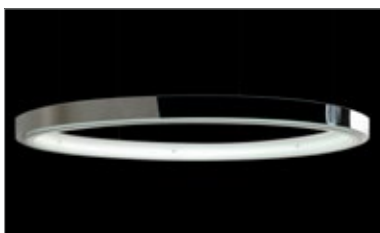

Size: L x W x H mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Total height	Mounting Version
Ø 750 / 29.5"	H 107 / 4.2" B 70 / 2.7"	36	3,109	8 / 17.6	228.	x x.	x x.	x x.	x x.	x x x.	107	x
Ø 900 / 35.5"	H 107 / 4.2" B 70 / 2.7"	44	3,767	10 / 22.0	229.	x x.	x x.	x x.	x x.	x x x.	107	x
Ø 1320 / 51.9"	H 107 / 4.2" B 70 / 2.7"	63	5,620	20 / 44.0	230.	x x.	x x.	x x.	x x.	x x x.	107	x
Ø 1600 / 62.9"	H 107 / 4.2" B 70 / 2.7"	77	6,010	25 / 55.1	231.	x x.	x x.	x x.	x x.	x x x.	107	x
Ø 1800 / 70.8"	H 107 / 4.2" B 70 / 2.7"	86	8,351	30 / 66.0	238.	x x.	x x.	x x.	x x.	x x x.	107	x
Ø 2300 / 90.5"	H 107 / 4.2" B 70 / 2.7"	110	10,711	35 / 77.2	232.	x x.	x x.	x x.	x x.	x x x.	107	x
Ø 1320 / 51.9"	H 170 / 6.7" B 70 / 2.7"	63	5,620	20 / 44.0	230.	x x.	x x.	x x.	x x.	x x x.	170	x
Ø 1600 / 62.9"	H 170 / 6.7" B 70 / 2.7"	77	6,010	25 / 55.1	231.	x x.	x x.	x x.	x x.	x x x.	170	x
Ø 1800 / 70.8"	H 170 / 6.7" B 70 / 2.7"	86	8,351	30 / 66.0	238.	x x.	x x.	x x.	x x.	x x x.	170	x
Ø 2300 / 90.5"	H 170 / 6.7" B 70 / 2.7"	110	10,711	35 / 77.2	232.	x x.	x x.	x x.	x x.	x x x.	170	x
Ø 2600/102.3"	H 170 / 6.7" B 70 / 2.7"	124	10,876	40 / 88.0	234.	x x.	x x.	x x.	x x.	x x x.	170	x
Ø 3500/137.8"	H 170 / 6.7" B 70 / 2.7"	166	15,952	53 / 117.0	235.	x x.	x x.	x x.	x x.	x x x.	170	x
Ø 3500/137.8"	H 230 / 9.0" B 70 / 2.7"	166	15,952	53 / 117.0	235.	x x.	x x.	x x.	x x.	x x x.	230	x

LED	Icon	Color	Temp (K)	Options	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Total height	Mounting Version
24V		Neutral-white	4000 K	(Standard)	x x x.	69.	x x.	x x.	x x.	x x x.	x x x.	x
		Cold-white	5000 K	(Optional)	x x x.	62.	x x.	x x.	x x.	x x x.	x x x.	x
		Warm-white	3000 K	(Optional)	x x x.	63.	x x.	x x.	x x.	x x x.	x x x.	x
CRI > 80		Extra warm-white	2700 K	(Optional)	x x x.	61.	x x.	x x.	x x.	x x x.	x x x.	x
		Extra warm-white	2200 K	(Optional)	x x x.	22.	x x.	x x.	x x.	x x x.	x x x.	x
		Tunable white*	2700 - 6500 K	(Optional)	x x x.	65.	x x.	x x.	x x.	x x x.	x x x.	x
		RGB color control*		(Optional)	x x x.	60.	x x.	00.	x x.	x x x.	x x x.	x
		RGB + Neutral-White	4000 K	(Optional)	x x x.	60.	x x.	69.	x x.	x x x.	x x x.	x

* (only in combination with dimming DMX)
 Combinations up to 2 strips (H107) and 3 strips (H170/230) of LED possible

Dimming	Icon	Options	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Total height	Mounting Version	
		Dimmable 0 - 10 V	(Standard)	x x x.	x x.	51.	00.	x x.	x x x.	x x x.	x
		DMX (RGB possible)	(Optional)	x x x.	x x.	31.	00.	x x.	x x x.	x x x.	x
		LUTRON (contact factory)	(Optional)	x x x.	x x.	71.	00.	x x.	x x x.	x x x.	x



Complete order number

x x x.	x x.	x x.	x x.	x x.	x x x.	x x x.	x
--------	------	------	------	------	--------	--------	---

1) Net lumen output: Losses due to diffusers and reflectors are considered.
 Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
 2) Weight of lights without remote technical unit or canopy.

CIRCOLO

Housing: Circular aluminum profile, opal acrylic diffuser on the inside
 Design: SATTLER, Patented

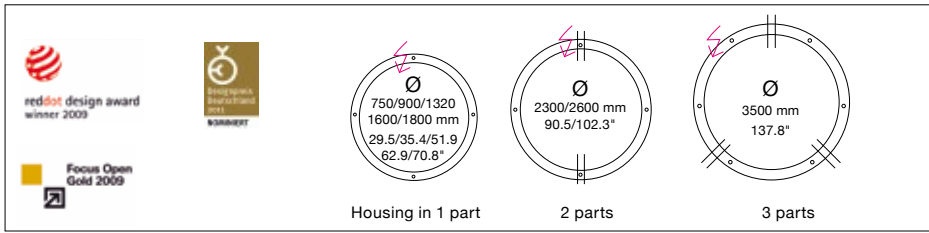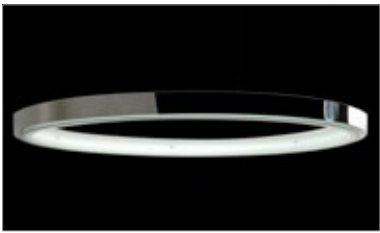

		Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Total height	Mounting Version
Finishes (Standard) 11 white (Optional) 30 anthracite 27 brush-finished aluminum 32 crocodile black 33 sand silver fine textured 35 gold 36 brass 37 bronze fine textured 38 copper 10 black fine textured 40 brass patinated 42 bronze patinated 44 wood veneer, white borders 45 leather XX Custom finish									
		X X X.	X X.	X X.	X X.	X X.	X X X.	X X X.	X
Power Supply Cable (Standard) Z 70 Silver (Optional) Z 71 white Z 72 grey Z 73 black When using current carrying steel cables in Mounting Versions F, K, T leave this section blank Z 74 orange Z 75 red Z 76 green									
		X X X.	X X.	X X.	X X.	X X.	X X X.	X X X.	X

X X X.	X X.	X X.	X X.	X X.	X X X.	X X X.	X
--------	------	------	------	------	--------	--------	---

Complete order number

CIRCOLO




410 381 1497 answers@inter-lux.com
 inter-lux reserves the right to make technical changes without notice

IP 20 Light distribution direct / indirect Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08


1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
 2) Weight of lights without remote technical unit or canopy.

1.8.17

CIRCOLO

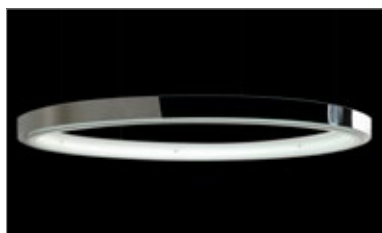

Housing: Circular aluminum profile, opal acrylic diffuser on the inside
 Design: SATTLER, Patented

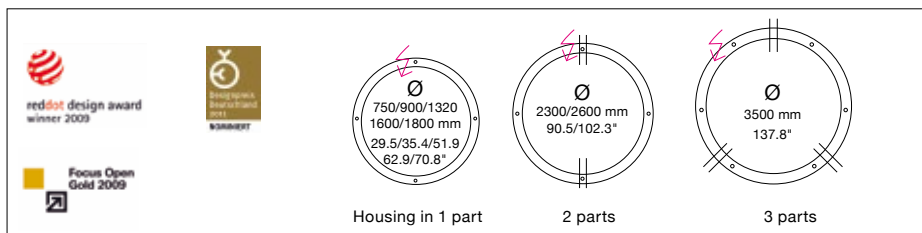

Mounting Version

A, B, C, D, G, H, K = Distance of external power supply unit to light fixture max. 10m / 394"

E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm / 197" ; Version F, S, T 5000 / 3000mm / 197"/118" and/or power supply cable 5000mm / 197"

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Total height	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X.	X X X.	X

Typ	Size mm / inch			Size of lamp mm / inch.	For use with Mounting Version
	L	W	H		
DE 1F	360 x 150	x 85		up to Ø 1800 / 62.9"	A, C, G, K
DE 2F	360 x 300	x 85		up to size Ø 3500 / 137.8"	A, G

Typ	Size mm / inch		For use with Mounting Version
	Ø cover plate / body	H	
DB 290	Ø 290 / 260 mm / 11.4 x 10.2"	up to size Ø 1800 / 62.9"	B, D, E, F, H
DB 350	Ø 350 / 320 mm / 13.7 x 12.5"	up to size Ø 3500 / 137.8"	B, H
PB 366	Ø 90 H 366 mm / 3.5 x 14.4"	up to size Ø 1320 / 51.9"	S, T
PB 656	Ø 90 H 656 mm / 3.5 x 25.8"	up to size Ø 1800 / 70.8"	S, T

Canopy finish: white (11) contact factory for other finishes
 USA/Canada: Canopy mounts to 4" octagonal junction box.

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

Complete order number


X X X.	X X.	X X.	X X.	X X.	X X X.	X X X.	X
--------	------	------	------	------	--------	--------	---

Optional



LED spot in canopy
 4W/20°-40°, 400 Lumen (order separately)

762. 67. 01. 04. 11. (white)



Ceiling fixation for mounting version A

200. 00. 00. 00. 11 (white)

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.