



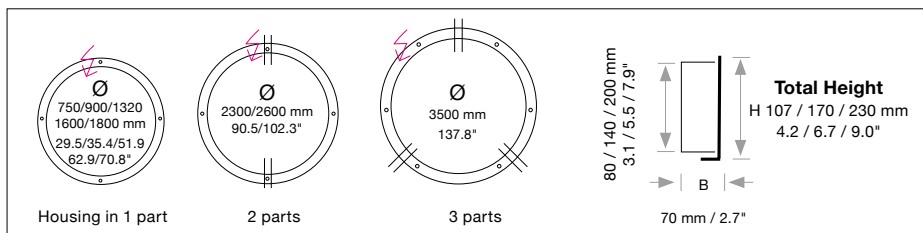

## CIRCOLO

Housing: Circular aluminum profile, opal acrylic diffuser on the inside  
 Design: SATTLER, Patented

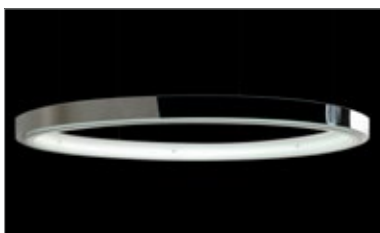



Size: L x W x H mm	inches	LED Watt	Lumen <sup>1)</sup>	weight kg <sup>2)</sup> / lbs <sup>2)</sup>	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Total height	Mounting Version
<b>Sizes</b>												
Ø 750 / 29.5"	H 107 / 4.2" B 70 / 2.7"	36	3,109	8 / 17.6	<b>228.</b>	x x .	x x .	x x .	x x .	x x x .	<b>107</b>	x
Ø 900 / 35.5"	H 107 / 4.2" B 70 / 2.7"	44	3,767	10 / 22.0	<b>229.</b>	x x .	x x .	x x .	x x .	x x x .	<b>107</b>	x
Ø 1320 / 51.9"	H 107 / 4.2" B 70 / 2.7"	63	5,620	20 / 44.0	<b>230.</b>	x x .	x x .	x x .	x x .	x x x .	<b>107</b>	x
Ø 1600 / 62.9"	H 107 / 4.2" B 70 / 2.7"	77	6,010	25 / 55.1	<b>231.</b>	x x .	x x .	x x .	x x .	x x x .	<b>107</b>	x
Ø 1800 / 70.8"	H 107 / 4.2" B 70 / 2.7"	86	8,351	30 / 66.0	<b>238.</b>	x x .	x x .	x x .	x x .	x x x .	<b>107</b>	x
Ø 2300 / 90.5"	H 107 / 4.2" B 70 / 2.7"	110	10,711	35 / 77.2	<b>232.</b>	x x .	x x .	x x .	x x .	x x x .	<b>107</b>	x
Ø 1320 / 51.9"	H 170 / 6.7" B 70 / 2.7"	63	5,620	20 / 44.0	<b>230.</b>	x x .	x x .	x x .	x x .	x x x .	<b>170</b>	x
Ø 1600 / 62.9"	H 170 / 6.7" B 70 / 2.7"	77	6,010	25 / 55.1	<b>231.</b>	x x .	x x .	x x .	x x .	x x x .	<b>170</b>	x
Ø 1800 / 70.8"	H 170 / 6.7" B 70 / 2.7"	86	8,351	30 / 66.0	<b>238.</b>	x x .	x x .	x x .	x x .	x x x .	<b>170</b>	x
Ø 2300 / 90.5"	H 170 / 6.7" B 70 / 2.7"	110	10,711	35 / 77.2	<b>232.</b>	x x .	x x .	x x .	x x .	x x x .	<b>170</b>	x
Ø 2600/102.3"	H 170 / 6.7" B 70 / 2.7"	124	10,876	40 / 88.0	<b>234.</b>	x x .	x x .	x x .	x x .	x x x .	<b>170</b>	x
Ø 3500/137.8"	H 170 / 6.7" B 70 / 2.7"	166	15,952	53 / 117.0	<b>235.</b>	x x .	x x .	x x .	x x .	x x x .	<b>170</b>	x
Ø 3500/137.8"	H 230 / 9.0" B 70 / 2.7"	166	15,952	53 / 117.0	<b>235.</b>	x x .	x x .	x x .	x x .	x x x .	<b>230</b>	x
<b>LED</b> 24V CRI > 80		<b>Neutral-white</b> <b>Cold-white</b> <b>Warm-white</b> <b>Extra warm-white</b> <b>Extra warm-white</b> <b>Tunable white*</b> <b>RGB color control*</b> <b>RGB + Neutral-White</b>	<b>4000 K</b> <b>5000 K</b> <b>3000 K</b> <b>2700 K</b> <b>2200 K</b> <b>2700 - 6500 K</b> <b>4000 K</b>	<b>(Standard)</b> <b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b>	x x x . x x x . x x x . x x x . x x x . x x x . x x x . x x x .	<b>69.</b> <b>62.</b> <b>63.</b> <b>61.</b> <b>22.</b> <b>65.</b> <b>60.</b> <b>60.</b>	x x . x x . x x . x x . x x . x x . x x . x x .	x x . x x . x x . x x . x x . x x . x x . x x .	x x x . x x x . x x x . x x x . x x x . x x x . x x x . x x x .	x x x . x x x . x x x . x x x . x x x . x x x . x x x . x x x .	x x x x x x x x	
<b>Dimming</b>		<b>Dimmable 0 - 10 V</b> <b>DMX (RGB possible)</b> <b>LUTRON (contact factory)</b>		<b>(Standard)</b> <b>(Optional)</b> <b>(Optional)</b>	x x x . x x x . x x x .	x x . x x . x x .	<b>51.</b> <b>31.</b> <b>71.</b>	<b>00.</b> <b>00.</b> <b>00.</b>	x x . x x . x x .	x x x . x x x . x x x .	x x x . x x x . x x x .	x x x



Complete order number

## CIRCOLO

Housing: Circular aluminum profile, opal acrylic diffuser on the inside  
 Design: SATTLER, Patented

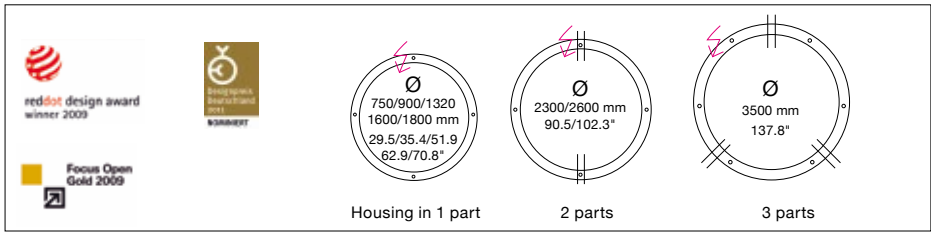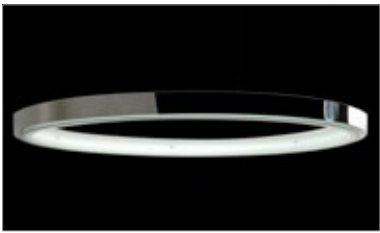

		Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Total height	Mounting Version
<b>Finishes</b>	(Standard) <b>11</b> white								
	(Optional) <b>22</b> aluminum polished								
	<b>30</b> anthracite								
	<b>27</b> brush-finished aluminum								
	<b>32</b> crocodile black								
	<b>33</b> sand silver fine textured								
	<b>35</b> gold								
	<b>36</b> brass								
	<b>37</b> bronze fine textured								
	<b>38</b> copper								
	<b>10</b> black fine textured	X X X.	X X.	X X.	X X.	X X.	X X X.	X X X.	X
<b>Power Supply Cable</b>	(Standard) <b>Z 70</b> Silver								
	(Optional) <b>Z 71</b> white								
	<b>Z 72</b> grey								
	<b>Z 73</b> black								
When using current carrying steel cables in Mounting Versions F, K, T leave this section blank									
	<b>Z 74</b> orange	X X X.	X X.	X X.	X X.	X X.	X X X.	X X X.	X
	<b>Z 75</b> red								
	<b>Z 76</b> green								



Complete order number

CIRCOLO

27.3.18




410 381 1497 [answers@inter-lux.com](mailto:answers@inter-lux.com)  
 inter-lux reserves the right to make technical changes without notice


Conforms to UL-STD 1598  
 Certified to CSA-STD C22.2  
 No.250.0-08

1) Net lumen output: Losses due to diffusers and reflectors are considered.  
 Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.  
 2) Weight of lights without remote technical unit or canopy.

## CIRCOLO

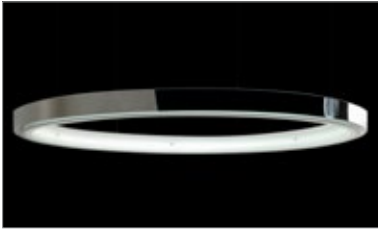

Housing: Circular aluminum profile, opal acrylic diffuser on the inside  
 Design: SATTLER, Patented

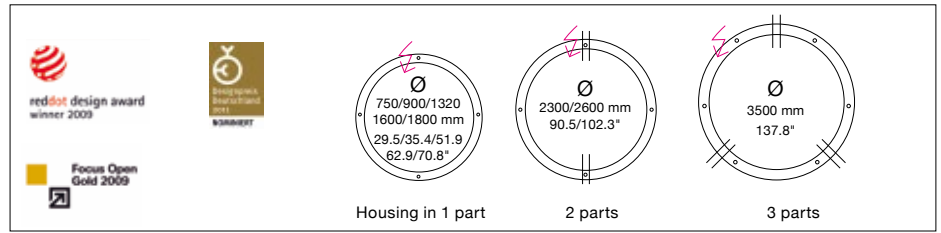

<b>Standard</b>					
4-point suspension with external power supply unit in suspended ceiling	2600mm 4-point suspension with external power supply unit in separate canopy	Up to Ø 1800 mm 1-point suspension with external power supply unit in separate canopy	1-point suspension up to Ø 1800mm / 70.8" and 1 external power supply unit in separate canopy	Up to Ø 1800 mm suspension through canopy	Up to Ø 1800 mm 4 current-carrying steel cables. Only 1 strip LED possible. Not in combination with RGB
Up to Ø 1800 mm Suspension with pendant canopy PB 366 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"	Up to Ø 1800 mm Suspension with pendant canopy PB 366 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" Not in combination with RGB.	Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling	Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy	Up to Ø 1800 mm. Suspension point as clamping unit with 4 current-carrying cables and remote technical unit in suspended ceiling.	

### Mounting Version

A, B, C, D, G, H, K = Distance of external power supply unit to light fixture max. 10m / 394"

E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm / 197" ; Version F, S, T 5000 / 3000mm / 197"/118" and/or power supply cable 5000mm / 197"

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Total height	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X.	X X X.	X

Typ	Dimensions of external power supply units (1 LED Stripe)			Size of lamp mm / inch.	For use with Mounting Version
	Size mm / inch	L	W H		
DE 1F	360 x 150 x 85	14.2 x 5.9 x 3.3"	up to Ø 1800 / 62.9"	A, C, G, K	
DE 2F	360 x 300 x 85	14.2 x 11.8 x 3.3"	up to size Ø 3500 / 137.8"	A, G	

Typ	Dimensions of canopy (1 LED Stripe)		For use with Mounting Version
	Size mm / inch	Ø cover plate / body	
DB 290	Ø 290 / 260 mm / 11.4 x 10.2"	up to size Ø 1800 / 62.9"	B, D, E, F, H
DB 350	Ø 350 / 320 mm / 13.7 x 12.5"	up to size Ø 3500 / 137.8"	B, H
PB 366	Ø 90 H 366 mm / 3.5 x 14.4"	up to size Ø 1320 / 51.9"	S, T
PB 656	Ø 90 H 656 mm / 3.5 x 25.8"	up to size Ø 1800 / 70.8"	S, T

Canopy finish: white (11) contact factory for other finishes  
 USA/Canada: Canopy mounts to 4" octagonal junction box.

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

Complete order number


X X X.	X X.	X X.	X X.	X X.	X X X.	X X X.	X
--------	------	------	------	------	--------	--------	---

### Optional



**LED spot in canopy**  
 4W/20°-40°, 400 Lumen (order separately)

**762. 67. 01. 04. 11.** (white)



**Ceiling fixation for mounting version A**

**200. 00. 00. 00. 11** (white)

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.