







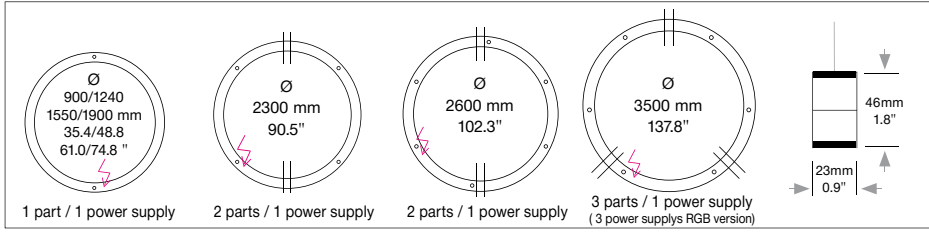

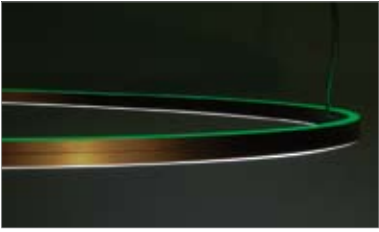


















DOPPIO DIRECT / INDIRECT

Housing: Circular aluminum profile with integrated acrylic covers.
Design: SATTLER





See Power Supply Section for Cable diameter

	Size: L x W x H mm	inches	LED Watt down / up	Lumen ¹⁾ down / up	Weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	Finishes	Power Supply cable	Mounting Version				
Sizes Indirect  Direct 	Ø 900 mm	35.4"	55 / 23	4.613 / 2.097	9 / 19.8	779.	x x.	x x. x x.	x x.	x x x.	x				
	Ø 1240 mm	48.8"	72 / 30	5.997 / 2.726	10 / 22.0	780.	x x.	x x. x x.	x x.	x x x.	x				
	Ø 1550 mm	61.0"	88 / 39	7.500 / 3.564	11 / 24.3	781.	x x.	x x. x x.	x x.	x x x.	x				
	Ø 1900 mm	74.8"	110 / 46	9.226 / 4.194	12 / 26.5	782.	x x.	x x. x x.	x x.	x x x.	x				
	Ø 2300 mm	90.5"	140 / 60	11.994 / 5.452	19 / 41.9	783.	x x.	x x. x x.	x x.	x x x.	x				
	Ø 2600 mm	102.3"	166 / 69	13.840 / 6.291	21 / 46.3	784.	x x.	x x. x x.	x x.	x x x.	x				
	Ø 3500 mm	137.8"	210 / 88	17.500 / 8.000	29 / 63.9	785.	x x.	x x. x x.	x x.	x x x.	x				
LED Direct 24V CRI > 90			Warm-white Neutral-white Extra warm-white	3000 K (Standard) 4000 K (Optional) 2700 K (Optional)	x x x. x x x. x x x.	63. 69. 61.	x x. x x. x x. x x. x x. x x.	x x. x x. x x.	x x x. x x x. x x x.	x x x					
LED Indirect 24V CRI > 90	 		Warm-white Neutral-white Extra warm-white RGB color control via dmx	3000 K (Standard) 4000 K (Optional) 2700 K (Optional) (Optional)	x x x. x x x. x x x. x x x.	63. 69. 61. 32. 60.	x x. x x. x x. x x. x x. x x. x x.	x x. x x. x x. x x.	x x x. x x x. x x x. x x x.	x x x x					
Dimming			Dimmable 0 - 10 V DMX	(Standard) (Optional)	x x x. x x x.	52. 32.	x x. x x.	x x. x x.	x x x. x x x.	x x					
Finishes (Standard)	 11 white	(Optional)	 22 aluminum polished	 27 brush-finished aluminum	 30 anthracite	 32 crocodile black	 33 sand silver fine textured	 35 gold	 36 brass	 37 bronze fine textured	 38 copper	 10 black fine textured	 XX Custom finish	x x x. x x. x x. x x. x x. x x x.	x x x x x x x x x
Power Supply Cable (Standard)	 Z 70 Silver	(Optional)	 Z 71 white	 Z 72 grey	 Z 73 black	 Z 74 orange	 Z 75 red	 Z 76 green	x x x. x x. x x. x x. x x. x x x.	x x x x x x x x x					


1) The stated lumen output of the lights is without considering the acrylic covers or reflectors
2) Weight of lights without remote technical unit or canopy

DOPPIO DIRECT / INDIRECT

Housing: Circular aluminum profile with integrated acrylic covers.
Design: SATTLER

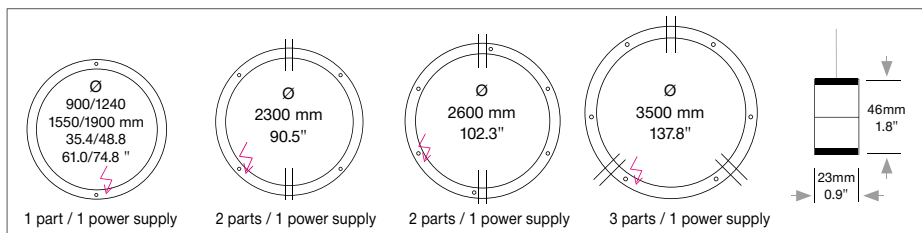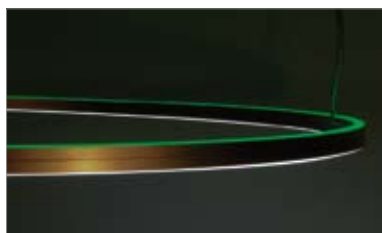


Mounting Version




up to Ø 2300 mm 4-point suspension
up to Ø 3500 mm 6-point suspension
with power supply cable and 1 external power supply unit in **suspended ceiling**

(Standard)



up to Ø 2300 mm 4-point suspension
up to Ø 3500 mm 6-point suspension
with 1 power supply cable and 1 external power supply unit in **separate canopy**

(Optional)



up to Ø 1550 mm
suspension through canopy

(Optional)

Item No.	LED	Dimming	Finishes	Power Supply cable	Mounting Version
x x x.	x x.	x x. x x.	x x.	x x x.	A
x x x.	x x.	x x. x x.	x x.	x x x.	B
x x x.	x x.	x x. x x.	x x.	x x x.	E


A, B = Distance of external power supply unit to light fixture max. 10m / 394".


E = Power supply unit in canopy: Max. suspension height approx. 2.0 times diameter of light.
Min. suspension height approx. 0.5 times diameter of light.

Mounting versions with steel cable length 3000mm / 118" and power supply cable transparent, length 3000mm / 118"

x x x.	x x.	x x. x x.	x x.	x x x.	x
--------	------	-----------	------	--------	---

Complete order number

Dimensions of external power supply units				
Typ	Size mm / inch			For use with
	L	W	H	Mounting Version
 DE 1F	360 x 150 x 85 mm / 14.7 x 5.9 x 3.3"	up to Ø 1900 mm		A
DE 2F	360 x 300 x 85 mm / 14.7 x 11.8 x 3.3"	up to Ø 2600 mm		A
DE 3F	360 x 400 x 85 mm / 14.7 x 15.7 x 3.3"	Ø 2600 mm		A

Dimensions of canopies		
Typ	Size mm / inch	For use with
	Ø cover plate / body / H	Mounting Version
 DB 350	Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	(up to Ø 1550 mm) B, E
DB 510	Ø 510 / 480 mm / 20.0 x 18.9"	(Ø 1900- 3500 mm) B
Canopy finish: white (11) contact factory for other finishes		
USA/Canada: Canopy mounts to 4" octagonal junction box.		

Input voltage for all external power supply units and canopies is **120 / 277 VAC 50 / 60 Hz**

1) The stated lumen output of the lights is without considering the acrylic covers or reflectors
2) Weight of lights without remote technical unit or canopy



Light distribution
direct / indirect



Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08

SATTLER

410 381 1497 inter-lux.com answers@inter-lux.com

inter-lux reserves the right to make technical changes without notice