



INSIEME

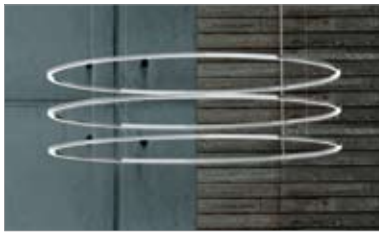

Housing: Pendant with light distribution to the inside, 3 circular aluminum profiles, with integrated acrylic covers.

Design: MARKUS BISCHOF

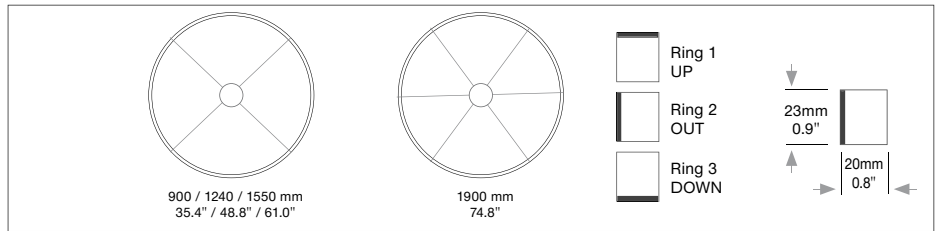


See Power Supply Section for Cable diameter

	Size: L x W x H mm	inches	LED Watt	Lumen ¹⁾	Weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	Finishes	Power Supply cable	Mounting Version										
Sizes	Ø 900 mm	35.4"	165	13.800	5.0 / 11.0	764.	x x.	x x. x x.	x x.	x x x.	x										
	Ø 1240 mm	48.8"	216	17.976	7.0 / 15.4	765.	x x.	x x. x x.	x x.	x x x.	x										
	Ø 1550 mm	61.0"	264	22.500	9.0 / 19.8	766.	x x.	x x. x x.	x x.	x x x.	x										
	Ø 1900 mm	74.8"	330	27.678	11.0 / 24.2	767.	x x.	x x. x x.	x x.	x x x.	x										
LED 24V CRI > 90		Warm-white	3000 K	(Standard)	x x x.	63.	x x. x x.	x x.	x x x.	x											
		Neutral-white	4000 K	(Optional)	x x x.	69.	x x. x x.	x x.	x x x.	x											
		Extra warm-white	2700 K	(Optional)	x x x.	61.	x x. x x.	x x.	x x x.	x											
Dimming		Dimmable 0 - 10 V DMX	(Standard) (Optional)	x x x.	x x.	51. 00.	x x.	x x x.	x												
				x x x.	x x.	31. 00.	x x.	x x x.	x												
Finishes		(Optional)														x x x.	x x.	x x. x x.		x x x.	x
Power Supply Cable (Standard)		Power cable 1/4"ø < 180W Power cable 3/8"ø > 180W	Z 70 Silver	x x x.	x x.	x x. x x.	x x.	x x.	x x.	Z70.	x										


1) The stated lumen output of the lights is without considering the acrylic covers or reflectors
2) Weight of lights without remote technical unit or canopy

INSIEME

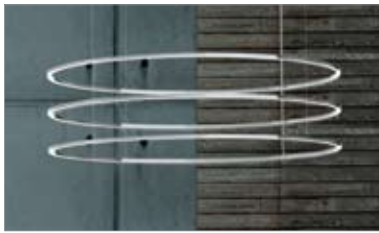


Housing: Pendant with light distribution to the inside, 3 circular aluminum profiles, with integrated acrylic covers.

Design: MARKUS BISCHOF

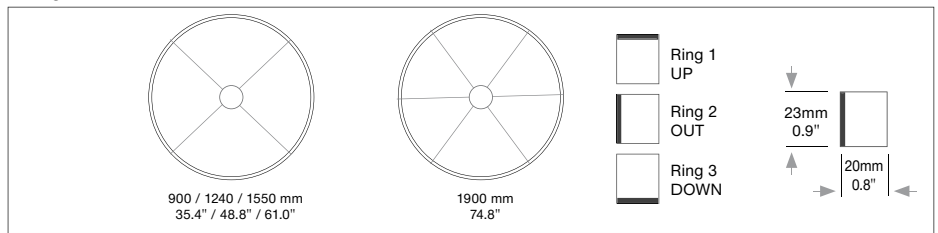


Mounting Version




Ø 900 - 1550 mm / 35.4 - 61.0"
4 suspensions through canopy
with external power supply unit in
suspended ceiling

(Standard)




Ø 1900 mm / 74.8"
6 suspensions through canopy
with external power supply unit in
suspended ceiling

(Standard)



Ø 900 - 1550 mm / 35.4 - 61.0"
4 suspensions through canopy
with external power supply unit in
suspended ceiling

(Optional)



Ø 1900 mm / 74.8"
6 suspensions through canopy
with external power supply unit in
suspended ceiling

(Optional)

Item No.	LED	Dimming	Finishes	Power Supply cable	Mounting Version
x x x.	x x.	x x. x x.	x x.	x x x.	A
x x x.	x x.	x x. x x.	x x.	x x x.	I


A, I = Distance of external power supply unit to light fixture max. 10m / 394".


Mounting versions with steel cable length 5 m / 197" and power supply cable transparent, length 10 m / 394"



x x x.	x x.	x x. x x.	x x.	270.	x
--------	------	-----------	------	-------------	---

Complete order number

Dimensions of external power supply units				
Type	Size mm / inch			For use with
	L	W	H	Mounting Version
 DE 2F	360 x 300 x 85 mm / 14.7 x 11.8 x 3.3"	Ø 900 up to Ø 1550 A, I		
DE 3F	360 x 400 x 85 mm / 14.7 x 15.7 x 3.3"	Ø 1900 A, I		

Dimensions of canopies			
Type	Size mm / inch	For use with	
	Ø cover plate / body / H	Mounting Version	
	DB 290	Ø 290 / 260 mm / 11.4 x 10.2"	I
		H 60 mm / 2.3"	
Canopy finish: white (11) contact factory for other finishes			
USA/Canada: Canopy mounts to 4" octagonal junction box.			

Input voltage for all external power supply units and canopies is **120 / 277 VAC 50 / 60 Hz**

1) The stated lumen output of the lights is without considering the acrylic covers or reflectors
2) Weight of lights without remote technical unit or canopy

410 381 1497 inter-lux.com answers@inter-lux.com
inter-lux reserves the right to make technical changes without notice



Light distribution
direct / indirect



Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08