










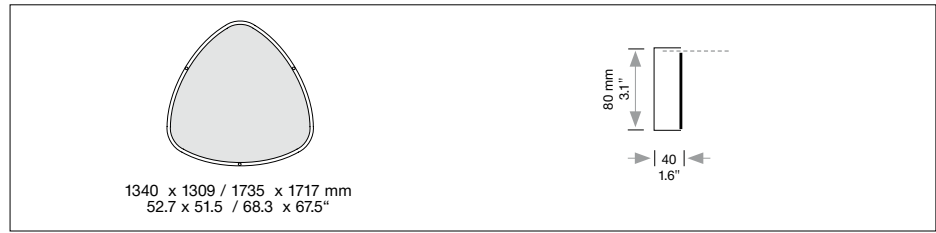

















## SOFT DELTA LIGHT + ACOUSTIC

Housing: Aluminium profile, integrated acrylic glass cover. Fabric covering as a light and acoustic diffusor.  
Design: SATTLER




See Power Supply Section for Cable diameter

	Size: L x W x H mm	inches	LED Watt	Lumen <sup>1)</sup>	weight kg <sup>2)</sup> / lbs <sup>2)</sup>	Item No.	LED	Dimming	Finishes	Power Supply cable	Mounting Version								
<b>Sizes</b>	1340 x 1309 x 80	52.7 x 51.5 x 3.1	78	7.020	14 / 30.0	<b>850.</b>	x x.	x x. x x.	x x.	x x x.	x								
	1735 x 1717 x 80	68.3 x 67.5 x 3.1	102	9.180	17 / 37.5	<b>862.</b>	x x.	x x. x x.	x x.	x x x.	x								
<b>LED</b> 24V		<b>Neutral-white</b>	<b>4000 K</b>	<b>(Standard)</b>	x x x.	<b>69.</b>	x x. x x.	x x.	x x x.	x									
		<b>Cold-white</b>	<b>5000 K</b>	<b>(Optional)</b>	x x x.	<b>62.</b>	x x. x x.	x x.	x x x.	x									
		<b>Warm-white</b>	<b>3000 K</b>	<b>(Optional)</b>	x x x.	<b>63.</b>	x x. x x.	x x.	x x x.	x									
		<b>Extra warm-white</b>	<b>2700 K</b>	<b>(Optional)</b>	x x x.	<b>61.</b>	x x. x x.	x x.	x x x.	x									
		<b>RGB color control via dmx</b>		<b>(Optional)</b>	x x x.	<b>60.</b>	<b>31. 00.</b>	x x.	x x x.	x									
		<b>RGB + Neutral-White (dmx)</b>	<b>4000 K</b>	<b>(Optional)</b>	x x x.	<b>60.</b>	<b>32. 69.</b>	x x.	x x x.	x									
Combinations up to two stripes of LED possible																			
<b>Dimming</b>		<b>Without Dimmer</b>		<b>(Standard)</b>	x x x.	x x.	<b>01. 00.</b>	x x.	x x x.	x									
		<b>DMX</b>		<b>(Optional)</b>	x x x.	x x.	<b>31. 00.</b>	x x.	x x x.	x									
		<b>Dimmable 1 - 10 V</b>		<b>(Optional)</b>	x x x.	x x.	<b>41. 00.</b>	x x.	x x x.	x									
		<b>Dimmable 0 - 10 V (Lutron compatible)</b>		<b>(Optional)</b>	x x x.	x x.	<b>51. 00.</b>	x x.	x x x.	x									
		<b>Dimmable DALI</b>		<b>(Optional)</b>	x x x.	x x.	<b>61. 00.</b>	x x.	x x x.	x									
<b>Finishes</b>		<b>11</b> white	<b>(Optional)</b>		<b>22</b> aluminium polished		<b>30</b> anthracite		<b>27</b> brush-finished aluminium		<b>32</b> crocodile black		<b>33</b> sand silver fine textured						
					<b>35</b> gold		<b>36</b> brass		<b>37</b> bronze fine textured		<b>38</b> copper		<b>39</b> architectural bronze						
					<b>40</b> brass patinated		<b>42</b> bronze patinated		<b>44</b> wood veneer, white borders		<b>XX</b> Custom finish			x x x.	x x.	x x. x x.	<input type="checkbox"/>	x x x.	x
<b>Power Supply Cable</b>		<b>Z 70</b> Silver	<b>(Optional)</b>		<b>Z 71</b> white		<b>Z 72</b> grey		<b>Z 73</b> black										
					<b>Z 74</b> orange		<b>Z 75</b> red		<b>Z 76</b> green					x x x.	x x.	x x. x x.	<input type="checkbox"/>	x x.	x




## SOFT DELTA LIGHT + ACOUSTIC

Housing: Aluminium profile, integrated acrylic glass cover. Fabric covering as a light and acoustic diffusor.  
Design: SATTLER

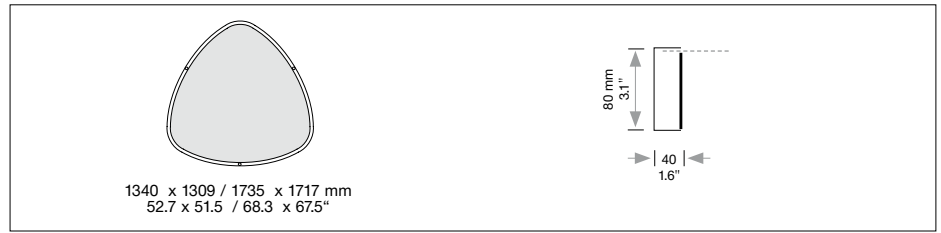


### Mounting Version




3-point suspension with external power supply unit in suspended ceiling

**(Standard)**




3-point suspension with external power supply unit in separate canopy

**(Optional)**




suspension through canopy

**(Optional)**




3 current-carrying steel cables <sup>3)</sup>  
Not in combination with RGB

**(Optional)**



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling

**(Optional)**



Direct ceiling mounting 50mm / 1.9" with external power supply unit in separate canopy

**(Optional)**

Item No.	LED	Dimming	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X. X X.	X X.	X X X.	<b>A</b>
X X X.	X X.	X X. X X.	X X.	X X X.	<b>B</b>
X X X.	X X.	X X. X X.	X X.	X X X.	<b>E</b>
X X X.	X X.	X X. X X.	X X.	X X X.	<b>F</b>
X X X.	X X.	X X. X X.	X X.	X X X.	<b>G</b>
X X X.	X X.	X X. X X.	X X.	X X X.	<b>H</b>

**A, B, G, H** = Distance of external power supply unit to light fitting max. 10m / 394".

**E, F** = Power supply unit in canopy Max. suspension height approx. 2.5 times diameter of light.

**Mounting versions with steel cable length 5000mm / 197" and power supply cable silver, length 5000mm / 197"**

X X X.	X X.	X X. X X.	X X.	X X X.	X
--------	------	-----------	------	--------	---

**Complete order number**

**Dimensions of external power supply units**

Typ	Size mm / inch	For usage with Mounting Version
	L W H	
<b>Standard</b>		
<b>DE 1H</b>	150 x 140 x 360 mm / 5.9 x 5.5 x 14.7"	<b>A, G</b>

**Optional flat version on request (Not available in USA and Canada)**

<b>DE 1F</b>	360 x 150 x 85 mm / 14.7 x 5.9 x 3.3"	<b>A, G</b>
--------------	---------------------------------------	-------------

**Dimensions of canopies**

Typ	Size mm / inch	For usage with Mounting Version
	Ø cover plate / body	
<b>DB 290</b>	Ø 290 / 260 mm / 11.4 x 10.2"	<b>B, E, F, H (1340 mm)</b>
<b>DB 350</b>	Ø 350 / 320 mm / 13.7 x 12.5"	<b>B, E, F, H (1735 mm)</b>

USA/Canada: Canopies mount to all standard junction boxes.

Input voltage for all external power supply units and canopies is **90-264 VAC 47-63 Hz**



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08

**IP 20**

Protective rating



Light distribution direct



Protection class III: only suitable for very low voltag supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.