


## SOFT DELTA

Housing: Aluminum profile, integrated (I) or L-shaped acrylic cover (L)  
 Design: SATTLER

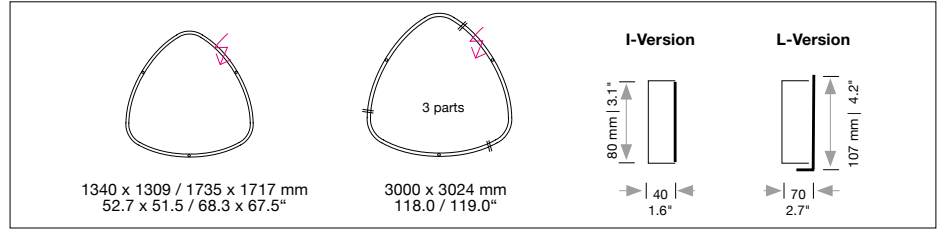


Sizes	Size: L x W x H mm	inches	LED Watt	Lumen <sup>1)</sup>	weight kg <sup>2)</sup> / lbs <sup>2)</sup>	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
<b>I-Version</b>	1340 x 1309 x 80	52.7 x 51.5 x 3.1	64	5,862	14 / 30.0	<b>849.</b>	x x .	x x .	x x .	x x .	x x x .	x
	1735 x 1717 x 80	68.3 x 67.5 x 3.1	82	6,657	17 / 37.5	<b>861.</b>	x x .	x x .	x x .	x x .	x x x .	x
	3024 x 3000 x 80	119.0 x 118.1 x 3.1	145	11,772	27 / 59.5	<b>863.</b>	x x .	x x .	x x .	x x .	x x x .	x
<b>L-Version</b>	1340 x 1309 x 107	52.7 x 51.5 x 4.2	64	7,767	14 / 30.0	<b>848.</b>	x x .	x x .	x x .	x x .	x x x .	x
	1735 x 1717 x 107	68.3 x 67.5 x 4.2	82	6,883	17 / 37.5	<b>860.</b>	x x .	x x .	x x .	x x .	x x x .	x
<b>LED</b> 24V  CRI > 80		<b>Neutral-white</b> <b>Cold-white</b> <b>Warm-white</b> <b>Extra warm-white</b> <b>Extra warm-white</b> <b>Tunable white*</b> <b>RGB color control*</b> <b>RGB + Neutral-White*</b>	<b>4000 K</b> <b>5000 K</b> <b>3000 K</b> <b>2700 K</b> <b>2200 K</b> <b>2700 - 6500 K</b> <b>4000 K</b> <b>4000 K</b>	<b>(Standard)</b> <b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b>	x x x . x x x . x x x . x x x . x x x . x x x . x x x . x x x .	<b>40.</b> <b>50.</b> <b>30.</b> <b>27.</b> <b>22.</b> <b>65.</b> <b>60.</b> <b>60.</b>	x x . x x . x x . x x . x x . x x . x x . x x .	x x . x x . x x . x x . x x . x x . x x . x x .	x x . x x . x x . x x . x x . x x . x x . x x .	x x x . x x x . x x x . x x x . x x x . x x x . x x x . x x x .	x x x x x x x x	
<b>Dimming</b>		<b>Dimmable 0 - 10 V</b> <b>DMX (RGB possible)</b> <b>LUTRON (contact factory)</b>	<b>(Standard)</b> <b>(Optional)</b> <b>(Optional)</b>	x x x . x x x . x x x .	x x . x x . x x .	<b>51.</b> <b>31.</b> <b>71.</b>	<b>00.</b> <b>00.</b> <b>00.</b>	x x . x x . x x .	x x . x x . x x .	x x x . x x x . x x x .	x x x	
<b>Finishes</b>	 11 white (Optional)	 22 aluminum polished  30 anthracite  27 brush-finished aluminum  32 crocodile black  33 sand silver fine textured  35 gold  36 brass  37 bronze fine textured  38 copper  10 black fine textured  40 brass patinated  42 bronze patinated  44 wood veneer, white borders  XX Custom finish	x x x . x x . x x . x x . x x . x x . x x . x x . x x . x x . x x . x x . x x .	x x . x x . x x . x x . x x . x x . x x . x x . x x . x x . x x . x x . x x .	x x x . x x . x x . x x . x x . x x . x x . x x . x x . x x . x x . x x . x x .	x x x x x x x x x x x x x						
<b>Power Supply Cable</b>	 Z 70 Silver (Optional)	 Z 71 white  Z 72 grey  Z 73 black  Z 74 orange  Z 75 red  Z 76 green	x x x . x x . x x . x x . x x . x x . x x . x x .	x x . x x . x x . x x . x x . x x . x x . x x .	x x x . x x . x x . x x . x x . x x . x x . x x .	x x x x x x x x						


1) Net lumen output: Losses due to diffusers and reflectors are considered.  
 Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.  
 2) Weight of lights without remote technical unit or canopy.

## SOFT DELTA


Housing: Aluminum profile, integrated (I) or L-shaped acrylic cover (L)  
 Design: SATTLER

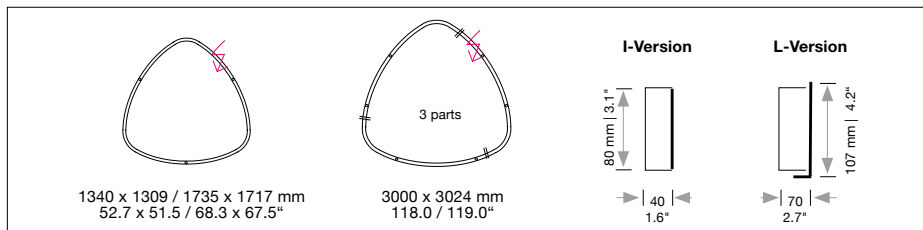


### Mounting Version




3/6-point suspension with external power supply unit in suspended ceiling




3/6-point suspension with external power supply unit in separate canopy




Up to 1735 x 1717 suspension through canopy




Up to 1735 x 1717 3 current-carrying steel cables. Only 1 strip LED possible. Not in combination with RGB




Suspension with pendant canopy PB 366 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"




Suspension with pendant canopy PB 366 and current-carrying steel cables. (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" Not in combination with RGB.



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy



Up to 1735 x 1717. Suspension point as clamping unit with 3 current-carrying cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
x x x.	x x.	x x.	x x.	x x.	x x x	.

x x x.	x x.	x x.	x x.	x x.	x x x	x
--------	------	------	------	------	-------	---

Complete order number

A, B, G, H = Distance of external power supply unit to light fixture max. 10m / 394".

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm / 197" ; Version F, S, T 5000 / 3000mm / 197"/118" and/or power supply cable 5000mm / 197"

Typ	Dimensions of external power supply units (1 LED Stripe)			For use with Mounting Version
	Size mm / inch	L W H		
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"			A, G, K
DE 2F	360 x 300 x 85 mm / 14.2 x 11.8 x 3.3"			A, G, K for size 3000 x 3024 mm

Typ	Dimensions of canopy (1 LED Stripe)		For use with Mounting Version
	Size mm / inch	Ø cover plate / body	
DB 290	Ø 290 / 260 mm / 11.4 x 10.2"	size 1340 x 1309 mm	B, E, F, H
DB 350	Ø 350 / 320 mm / 13.7 x 12.5"	size 1735 x 1717 and 3000 x 3024 mm	B, E, F, H
PB 366	Ø 90 H 366 mm / 13.7 x 12.5"		S, T

Canopy finish: white (11) contact factory for other finishes  
 USA/Canada: Canopy mounts to 4" octagonal junction box.


Input voltage for all external power supply units and canopy is 120 / 277 VAC 50/60 Hz

### Optional



LED spot in canopy  
 4W/20°-40°, 400 Lumen (order separately)

762. 67. 01. 04. 11. (white)



Ceiling fixation for mounting version A

200. 00. 00. 00. 11 (white)

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.