


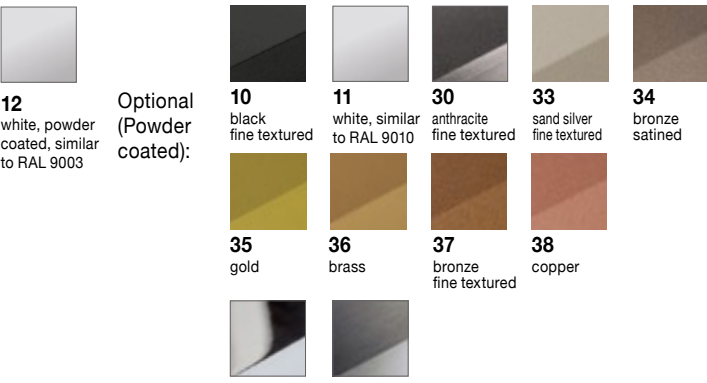



TOCCATA



Housing: Pendant light with direct light distribution, 3/ 5 parts Aluminum profile, with integrated opal diffuser
Design: MARKUS BISCHOF

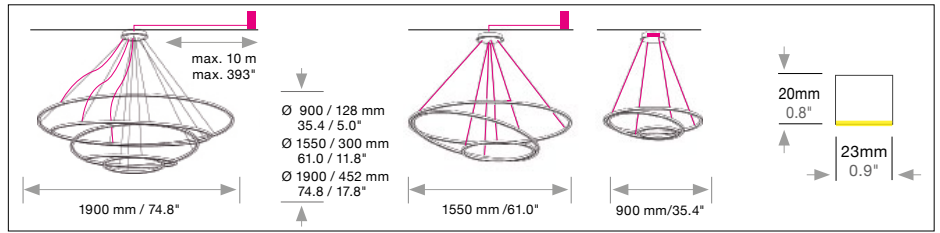


Size: Ø mm	Inches	LED Watt	Lumen ¹	Weight kg/lbs ²	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Sizes Ø 900 mm <small>*Ø900-700-380mm</small>	35.4" <small>35.4"-27.5"-14.9"</small>	83	4840	8.0 / 17.6	777.	X X.	X X.	X X.	X X.	X X X.	X
Ø 1550 mm <small>*Ø1550-1240-700 mm</small>	61.0" <small>61.0"-48.8"-27.5"</small>	143	8291	11.0 / 24.2	771.	X X.	X X.	X X.	X X.	X X X.	X
Ø 1900 mm <small>*Ø1900-1550-1240-900-600 mm</small>	74.8" <small>74.8"-61.0"-48.8"-35.4"-23.6"</small>	248	14,580	14.0 / 30.8	773.	X X.	X X.	X X.	X X.	X X X.	X
LED 24V CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		Standard: Warm-white	3000 K		X X X.	30.	X X.	X X.	X X.	X X X.	X
		Optional:	Natural-white Neutral-white Extra warm-white	3500 K 4000 K 2700 K	X X X. X X X. X X X.	35. 40. 27.	X X. X X. X X.	X X. X X. X X.	X X. X X. X X.	X X X. X X X. X X X.	X X X
Dimming		Standard: 0 - 10 V			X X X.	X X.	51.	00.	X X.	X X X.	X
		Optional:	Lutron EcoSystem DMX		X X X. X X X.	X X. X X.	91. 31.	00. 00.	X X. X X.	X X X. X X X.	X X
Finish		Standard:	12 white, powder coated, similar to RAL 9003	Optional (Powder coated):							
				10 black fine textured 11 white, similar to RAL 9010 30 anthracite fine textured 33 sand silver fine textured 34 bronze satined 35 gold 36 brass 37 bronze fine textured 38 copper							
		Optional (Premium):	22 aluminum polished 27 brush-finished aluminum		X X X.	X X.	X X.	X X.	X X.	X X X.	X
Power supply cable		Standard:	000 current-carrying J, F	Standard:							
				Z 70 silver Mounting Version A,I,E	X X X.	X X.	X X.	X X.	X X.	X X X.	X

TOCCATA




Housing: Pendant light with direct light distribution, 3/ 5 parts Aluminum profile, with integrated opal diffuser.
Design: MARKUS BISCHOF

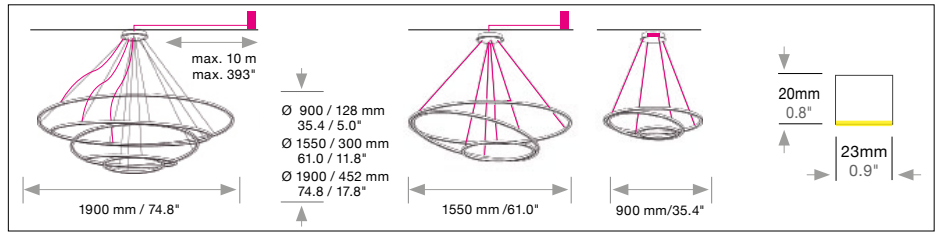


Mounting versions


Standard:



Ø 900 mm / 35.4"
4 current-carrying steel cables, with power supply in canopy.




Ø 1900 mm / 74.8"
14 suspensions through canopy and 3 power supply cables with external power supply unit in suspended ceiling.




Ø 1550 mm / 61.0"
6 current-carrying steel cables with external power supply unit in suspended ceiling.
Optional J Ø 1900 mm / 74.8"
14 current-carrying steel cables.

Optional:



4/6/14-point suspension with external power supply unit in suspended ceiling.



Ø 900 mm / 35.4"
4 suspensions through canopy with external power supply unit in canopy.

I / J = Distance of external power supply unit to light fixture max. 10m / 394".
 F, E = Power supply unit in canopy Max. suspension height approx. 2.0 times diameter of light.

Mounting version with steel cable length 3 m / 118" and power supply cable, length 2/3 x 5 m / 2/3 x 197" (1550, 1900)

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
x x x.	x x.	x x.	x x.	x x.	x x x	-

---	---	---	---	---	---	---
-----	-----	-----	-----	-----	-----	-----

Complete order number

W H L	Power supply units:			Protective rating
	Type / Size mm / inch L x W x H	Included with Mounting version		
	DE 1F 360 x 143 x 56 mm / 14.2 x 5.6 x 2.2"	A (Ø 900 mm)	IP 20	
	DE 2F 360 x 283 x 56 mm / 14.2 x 11.1 x 2.2"	I, J, A (Ø 1550 mm)	IP 20	
	DE 3F 360 x 400 x 85 mm / 14.2 x 15.7 x 3.3"	I, J, A (Ø 1900 mm)	IP 20	

Ø body H Ø cover plate	Canopy:			Protective rating
	Type/ Size mm / inch Ø cover plate / body / H	Included with Mounting version		
	DB 290 Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	F, E (Ø 900)	IP 20	
	DB 230S Ø 230 / 210 / 60 mm / 9.0 x 8.3 / 2.3"	I, J (Ø 1550, 1900 mm)	IP 20	


Color: 12 white, similar RAL 9003, contact factory for other finishes

Color: Base finish white (12), Cover white (12), contact factory for other finishes

Canopy mounts to 4" octagonal junction box.

Input voltage for all external power supply units and canopy is **120-277 VAC 50-60 Hz**

Optional



Power cable cover plate for mounting version A, G

200. 00. 00. 00. 12. (white)

Consisting of a cavity ceiling box with 3.1" (80mm) round metal cover. Included with mounting version A, G.

