


TRIS

Housing: Aluminum profile with integrated opal diffuser
 Design: JÜRGEN BECKERT

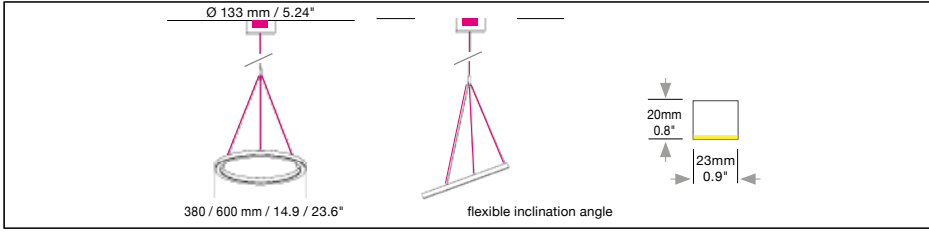

	Size: Ø mm	Inches	LED Watt	Lumen ¹	Weight kg/lbs ²	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Sizes	Ø 380 mm	14.9"	22	1269	2.5 / 5.5	582.	X X .	X X .	X X .	X X .	X X X .	X
	Ø 600 mm	23.6"	32	2192	3.0 / 6.6	583.	X X .	X X .	X X .	X X .	X X X .	X
LED 24V CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours	Standard: Warm-white		3000 K			X X X .	30.	X X .	X X .	X X .	X X X .	X
	Optional: Natural-white		3500 K			X X X .	35.	X X .	X X .	X X .	X X X .	X
	Neutral-white		4000 K			X X X .	40.	X X .	X X .	X X .	X X X .	X
	Extra warm-white		2700 K			X X X .	27.	X X .	X X .	X X .	X X X .	X
Dimming	Standard: 0 - 10 V					X X X .	X X .	51.	00.	X X .	X X X .	X
	Optional: Lutron EcoSystem DMX					X X X .	X X .	91.	00.	X X .	X X X .	X
Finish	Standard:											
	12 white, powder coated, similar to RAL 9003	Optional (Powder coated):	10 black fine textured	11 white, similar to RAL 9010	30 anthracite fine textured	33 sand silver fine textured	34 bronze satined					
			35 gold	36 brass	37 bronze fine textured	38 copper						
		Optional (Premium):	22 aluminum polished									
Power supply cable	Without power cable		Mounting version									
Standard:	000 Current-carrying F		Suspension point as clamping unit with 3 cables and remote technical unit in suspended ceiling."			X X X .	X X .	X X .	X X .	X X .	000.	F

Complete order number: ---. ---. ---. ---. ---. **000.** **F**

Power supply unit:

Type / Size mm / inch L x W x H	Included with Mounting version	Protective rating
DE 1F 360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	F	IP 20

Canopy:

Type/ Size mm / inch Ø cover plate / body / H	Included with Mounting version	Protective rating
DB 140 Ø 140 / 133 / 68 mm / 5.5 / 5.2 / 2.7"	F	IP 20

Color: Canopy finish same as housing finish
 Canopy mounts to 4" octagonal junction box.

Input voltage for all external power supply units and canopy is **120-277 VAC 50-60 Hz**