


# Quantum J1



Light management:  
aluminum casing coated with  
**embossed** or **golden** effect

Passive heat dissipation:  
**die-cast aluminum** heat  
sink

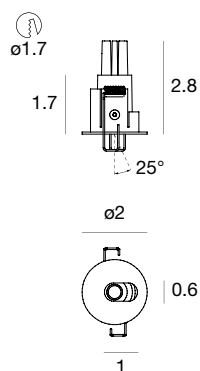
Functional aesthetics: optical  
compartment developed  
to guarantee **mobility** and  
**precision** in adjusting the  
position






**Convex** lens with *F.O.L.*™  
that concentrates and  
defines the beam



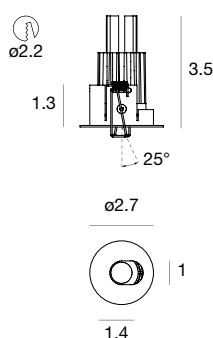
Casing tilting **up to ± 25°**




**Quantum J1 Adjustable** Downlight - LED PowerLED 2 W 630 mA**Damp**  **C.C. IP44**  

type	color	lumens	optic
 <b>E95987</b>	4000K	134 lm CRI 80	<b>N</b> 8° <b>08</b>
 <b>E95988</b>	3500K	128 lm CRI 80	<b>T</b> 15° <b>15</b>
 <b>E96437</b>	3000K	125 lm CRI 80	<b>W</b> 30° <b>30</b>
	2700K	119 lm CRI 80	<b>M</b> 45° <b>45</b>

power supply options (remote only)

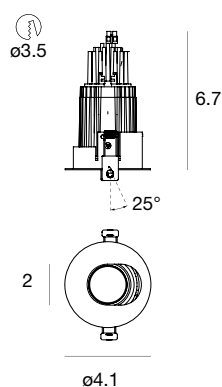
S	D010
Standard non-dim, 120-277V	1%, 0-10V dimming, 120-277V







**Quantum J1 Adjustable** Downlight - LED PowerLEDs 6 W 500 mA**Damp**  **C.C. IP44**  

type	color	lumens	optic
 <b>E95984</b>	4000K	439 lm CRI 80	<b>N</b> 15° <b>15</b>
 <b>E95985</b>	3500K	421 lm CRI 80	<b>T</b> 30° <b>30</b>
 <b>E96438</b>	3000K	405 lm CRI 80	<b>W</b>
	2700K	385 lm CRI 80	<b>M</b>

power supply options (remote only)

S	D010
Standard non-dim, 120-277V	1%, 0-10V dimming, 120-277V

**Quantum J1 Adjustable** Downlight - LED Array 15 W 400 mA**Damp**  **C.C. IP44**  

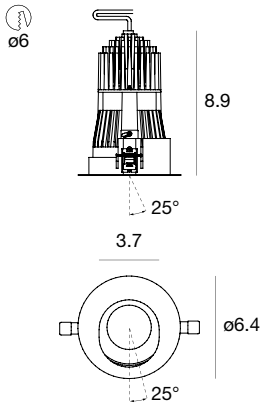
type	color	lumens	optic
 <b>E95993</b>	4000K	1127 lm CRI 83	<b>N</b> 15° <b>15</b>
 <b>E95994</b>	3500K	1081 lm CRI 83	<b>T</b> 30° <b>30</b>
 <b>E96439</b>	3000K	1059 lm CRI 83	<b>W</b> 45° <b>45</b>
	2700K	979 lm CRI 83	<b>M</b>
 <b>E95978</b>	3000K	787 lm CRI 95	<b>W</b> 15° <b>15</b>
 <b>E95979</b>	2700K	724 lm CRI 95	<b>M</b> 30° <b>30</b>
 <b>E96440</b>			45° <b>45</b>







power supply options (remote only)

S	D010
Standard non-dim, 120-277V	1%, 0-10V dimming, 120-277V

**Quantum J1 Adjustable** Downlight - LED Array 25 W 720 mA

Damp  C.C. IP44  



type	color	lumens			optic
 <b>E96371</b>	4000K	1855 lm	CRI 83	<b>N</b>	15° <b>15</b>
 <b>E96372</b>	3500K	1780 lm	CRI 83	<b>T</b>	30° <b>30</b>
 <b>E96374</b>	3000K	1715 lm	CRI 83	<b>W</b>	45° <b>45</b>
	2700K	1673 lm	CRI 83	<b>M</b>	
 <b>E96367</b>	4000K	1484 lm	CRI 95	<b>N</b>	15° <b>15</b>
 <b>E96368</b>	3000K	1413 lm	CRI 95	<b>W</b>	30° <b>30</b>
 <b>E96370</b>	2700K	1386 lm	CRI 95	<b>M</b>	45° <b>45</b>

power supply options (remote only)

S	D010
Standard non-dim, 120-277V	1%, 0-10V dimming, 120-277V