


Quantum







Light management:
aluminum casing coated with
embossed or **golden** effect




Passive heat dissipation:
die-cast aluminum heat
sink

Organic aesthetics: deep
"trumpet-shaped" optical
compartment with soft lines



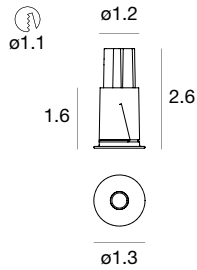



Elongated optical
compartment that reduces
glare with embossed or
"warm & chic" **golden**
finish




Quantum Downlight - LED PowerLED 2 W 630 mA**Damp**  **C.C. IP44**  

type	color	lumens			optic
 E95840	4000K	134 lm	CRI 80	N	8° 08
 E95841	3500K	128 lm	CRI 80	T	15° 15
 E96433	3000K	125 lm	CRI 80	W	30° 30
	2700K	119 lm	CRI 80	M	45° 45

power supply options (remote only)

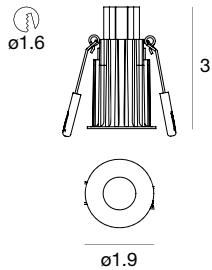
S	D010
Standard non-dim, 120-277V	1%, 0-10V dimming, 120-277V







Quantum Downlight - LED PowerLEDs 6 W 500 mA**Damp**  **C.C. IP44**  

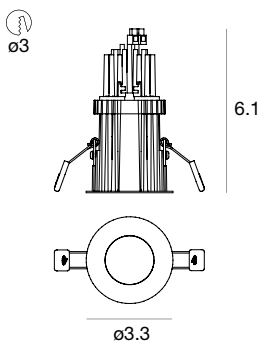type	color	lumens			optic
 E95843	4000K	439 lm	CRI 80	N	15° 15
 E95844	3500K	421 lm	CRI 80	T	30° 30
 E96434	3000K	405 lm	CRI 80	W	45° 45
	2700K	385 lm	CRI 80	M	

power supply options (remote only)

S	D010
Standard non-dim, 120-277V	1%, 0-10V dimming, 120-277V

Quantum Downlight - LED Array 15 W 400 mA**Damp**  **C.C. IP44**  


type	color	lumens			optic
 E95849	4000K	1127 lm	CRI 83	N	15° 15
 E95850	3500K	1081 lm	CRI 83	T	30° 30
 E96435	3000K	1059 lm	CRI 83	W	45° 45
	2700K	979 lm	CRI 83	M	
 E95852	3000K	787 lm	CRI 95	W	15° 15
 E95853	2700K	724 lm	CRI 95	M	30° 30
 E96436					45° 45

power supply options (remote only)

S	D010
Standard non-dim, 120-277V	1%, 0-10V dimming, 120-277V

Quantum Downlight - LED Array 25 W 720 mA

Damp  **C.C. IP44**  

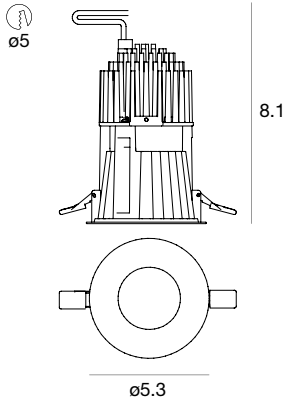

type	color	lumens			optic
White E96363	4000K	1855 lm	CRI 83	N	15° 15
Black E96364	3500K	1780 lm	CRI 83	T	30° 30
Gold E96366	3000K	1715 lm	CRI 83	W	45° 45
	2700K	1673 lm	CRI 83	M	
White E96359	4000K	1484 lm	CRI 95	N	15° 15
Black E96360	3000K	1413 lm	CRI 95	W	30° 30
Gold E96362	2700K	1386 lm	CRI 95	M	45° 45

power supply options (remote only)

S	D010
Standard non-dim, 120-277V	1%, 0-10V dimming, 120-277V