



Silicone 51 LEDs/ft | LED strip | Wet location | stripLED 4.4 W/ft 24 V



Cable 11.8 in supplied with product;
Female end connector



196.8" - CRI 90 - 72 W DC

E00505	Fin	CCT	lm S - lm D	Opt
	WH	M (2700K) W (3000K) N (4000K)	7290 - 7290 7695 - 7695 8100 - 8100	DI (Diffused)

Power supply options (remote only)


OT96-D010

Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location

OT96-JBX

Osram, Non-dim 24V DC, 120-277VAC, Wet location

Luno_20/27 | High square surface profile

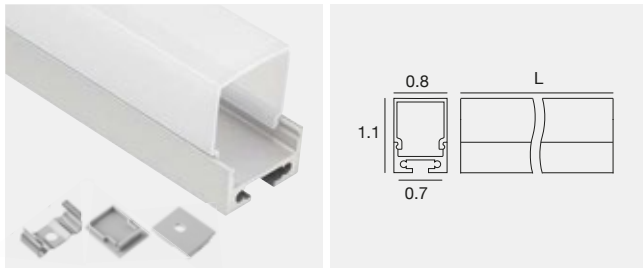

L inches

AM	E-K100017	78.7	Profile
BB	E-K100018	78.7	Profile
OP	E-K200001	78.7	Diffuser
BB	E-K200002	78.7	Diffuser
GG	E-K400019	2 x	Caps
BB	E-K400020	2 x	Caps
	E98931	5 x	Brackets


Luno_20/27 | High round surface profile



L inches

AM	E-K100017	78.7	Profile
BB	E-K100018	78.7	Profile
OP	E-K200003	78.7	Diffuser
BB	E-K200004	78.7	Diffuser
GG	E-K400021	2 x	Caps
BB	E-K400022	2 x	Caps
	E98931	5 x	Brackets


Roko_33/15 | Low recessed profile

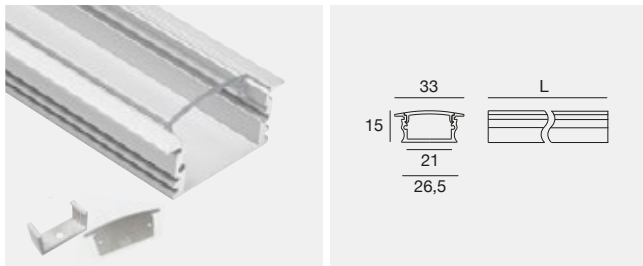

L inches

AM	E98897	78.7	Profile
TR	E98898	78.7	Diffuser
TN	E98899	78.7	Diffuser
OP	E98900	78.7	Diffuser
GG	E98902	2 x	Caps
	E98901	5 x	Brackets


Ghost_64/14 | Low recessed profile

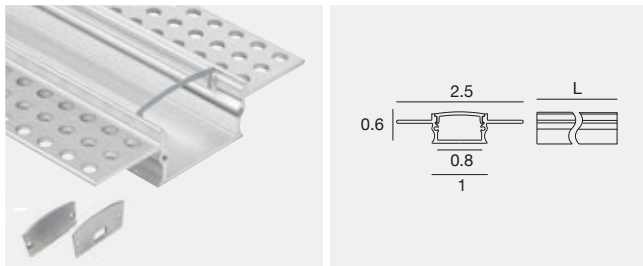

L inches


AM	E98906	78.7	Profile
TR	E98898	78.7	Diffuser
TN	E98899	78.7	Diffuser
OP	E98900	78.7	Diffuser
GG	E98907	2 x	Caps

Rialt_55/70 | Integrated side profile

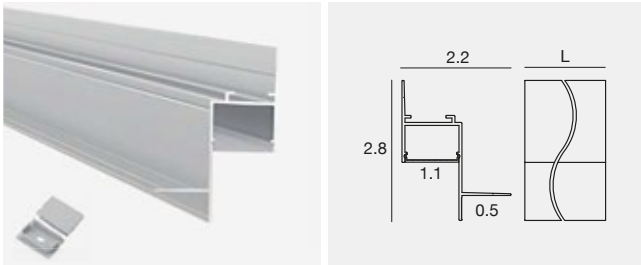


		L inches	
AM	E-K100025	78.7	Profile
OP	E-K200009	78.7	Diffuser (Optic 90°)
	E-V400041	2 x	Caps

Ozner_25/10 | Low surface profile

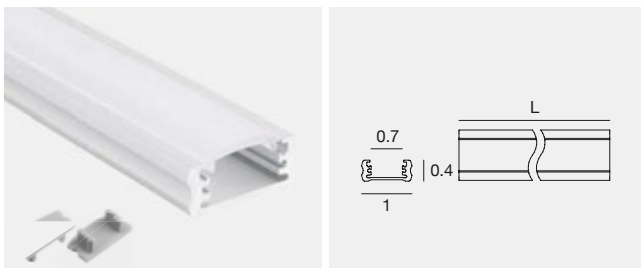

		L inches	
AM	E98419	78.7	Profile
TR	E98395	78.7	Profile
GG	E98418	2 x	Caps
	E98420	1 x	Bracket

Svik_00/00 | Heat sink

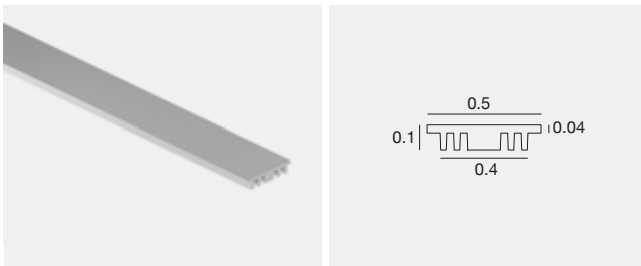

		L inches	
AM	E98956	78.7	Heat sink