

Rubber


Light management: **silicone resin diffuser** for a perfectly uniform emission with no hot spots



“Long” light: a reel is **23 foot max** long and is powered by a single driver




UV-stabilized PVC coating for **protection** against moisture, water jets and prolonged exposure to sunlight



Flexible casing on the plan parallel to the emitting surface to create inventive lines of light

Rubber LED Strip - 18 LEDs/ft

ETL wet location listed  C.V. IP65  

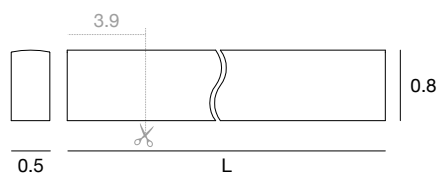

L feet	color				
23 max*	3.7 W/ft	4000K	108 lm/ft	CRI 70	98408-length**
23 max*	3.7 W/ft	3000K	80 lm/ft	CRI 70	98407-length**

*factory cut lengths available in 4 inch increments
**please specify length

power supply options (remote only)²

OT96-D010 0-10V / Non-dim Remote mounted driver supplied in a Dry location enclosure, 10% OSRAM OT96, 96W

Note: specify one power cable and one end cap per run


accessories



98412 **89137** **89136**
3.3 ft profile End cap (required) IP65 power cable (required)

Rubber RGB LED Strip - 18 LEDs/ft

ETL wet location listed  C.V. IP65  

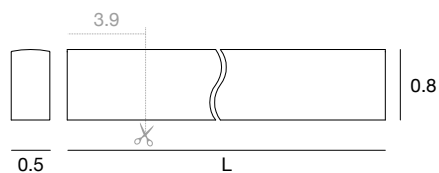

L feet	color			
23 max	3.7 W/ft	RGB	CRI 70	98409-length**

*factory cut lengths available in 4 inch increments
**please specify length

power supply options (remote only)²

OT96-DMX-KIT RGB 24V KIT, Non-dim driver, OSRAM OT96, 96W + D-550-20003 DMX interface, DMX Control not included / Ordered separately

Note: specify one power cable and one end cap per run

accessories



98412 **89137** **89135**
3.3 ft profile End cap (required) IP65 power cable (required)