


# FIO

Housing: Solid acrylic glass rod, with Aluminum frame  
Design: SATTLER

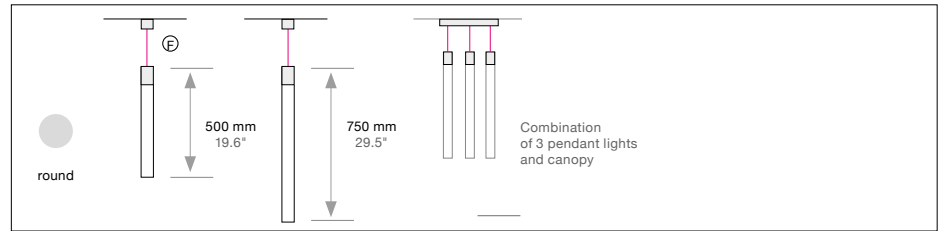

|              | Size: Ø / L mm | Inches      | LED Watt | Lumen <sup>1</sup> | Weight kg / lbs <sup>2</sup> | Item No.    | LED  | Dimming | LED  | Finish | Power supply cable | Mounting version |
|--------------|----------------|-------------|----------|--------------------|------------------------------|-------------|------|---------|------|--------|--------------------|------------------|
| FIO Single   | Ø 40, L 500 mm | Ø 2 L 19.6" | 6.3      | 858                | 2.0 / 4.4                    | <b>965.</b> | x x. | x x.    | x x. | x x.   | x x x.             | x                |
|              | Ø 40, L 750 mm | Ø 2 L 29.5" | 6.3      | 858                | 2.5 / 5.5                    | <b>968.</b> | x x. | x x.    | x x. | x x.   | x x x.             | x                |
| FIO Set of 3 | Ø 40, L 500 mm | Ø 2 L 19.6" | 14.1     | 1290               | 4.0 / 8.8                    | <b>966.</b> | x x. | x x.    | x x. | x x.   | x x x.             | x                |
|              | Ø 40, L 750 mm | Ø 2 L 29.5" | 14.1     | 1290               | 5.0 / 11.0                   | <b>967.</b> | x x. | x x.    | x x. | x x.   | x x x.             | x                |

|                                                                                                        |  |                                             |                  |                  |                    |              |              |              |                  |        |
|--------------------------------------------------------------------------------------------------------|--|---------------------------------------------|------------------|------------------|--------------------|--------------|--------------|--------------|------------------|--------|
| <b>LED</b><br>Constant<br>Current 200mA<br><br>CRI > 90<br>Mac Adam 3<br>SELV L80 B10<br>100,000 hours |  | Standard: Warm-white                        | 3000 K           | x x x.           | <b>30.</b>         | x x.         | x x.         | x x.         | x x x.           | x      |
|                                                                                                        |  | Optional: Neutral-white<br>Extra warm-white | 4000 K<br>2700 K | x x x.<br>x x x. | <b>40.<br/>27.</b> | x x.<br>x x. | x x.<br>x x. | x x.<br>x x. | x x x.<br>x x x. | x<br>x |

|                        |  |                  |        |      |            |            |      |        |   |
|------------------------|--|------------------|--------|------|------------|------------|------|--------|---|
| <b>Dimming</b><br><br> |  | Standard: 0-10 V | x x x. | x x. | <b>51.</b> | <b>00.</b> | x x. | x x x. | x |
|                        |  | Optional: DMX    | x x x. | x x. | <b>31.</b> | <b>00.</b> | x x. | x x x. | x |

|                                                                                                                                                             |  |  |  |  |        |      |      |      |    |        |   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|--------|------|------|------|----|--------|---|
| <b>Finish</b><br><br>Standard: <b>66</b> bronze anodized<br><br>Optional: <b>60</b> silver anodized <b>62</b> black anodized <b>65</b> champ. gold anodized |  |  |  |  | x x x. | x x. | x x. | x x. | -- | x x x. | x |
|                                                                                                                                                             |  |  |  |  |        |      |      |      |    |        |   |

|                                                          |                                                                                                              |        |      |      |      |      |             |          |
|----------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|--------|------|------|------|------|-------------|----------|
| <b>Power supply cable</b><br><br><b>Z 80</b> black matte | Mounting version ⑤<br>with power supply cable, length 2000mm / 78.7", remote power supply ordered separately | x x x. | x x. | x x. | x x. | x x. | <b>Z80.</b> | <b>F</b> |
|----------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|--------|------|------|------|------|-------------|----------|

|  |                                                                                                                       |                                                         |                                   |                                                                                             |                                                                                                                                  |  |                                                                                                                                                                                                                            |
|--|-----------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|-----------------------------------|---------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <b>Canopy:</b><br><br><b>DB 78/32</b> Cover Ø 78 mm / 3.0"<br>H 32 mm / 1.2"<br>Same Color as luminaire (60,62,65,66) | Included with Mounting version<br><b>single version</b> | Protective rating<br><b>IP 20</b> | <b>DBL 390</b><br>L x W x H 392 x 70 x 70 mm / 15.4 2.7 x 2.7" <b>set of 3</b> <b>IP 10</b> | <b>Color: 12 white, similar RAL 9003</b> , contact factory for other finishes<br><br>Canopy mounts to 4" octagonal junction box. |  | <b>Complete order number</b><br><br><b>Remote driver required ordered separately:</b><br>Type / Size mm / inch L x W x H<br><br><b>0-10V: ECO30W-200 13.25" x 5" x 2.25"</b><br><b>DMX: PWR50W-200 13.25" x 5" x 2.25"</b> |
|  |                                                                                                                       |                                                         |                                   |                                                                                             |                                                                                                                                  |  |                                                                                                                                                                                                                            |

Input voltage for all external power supply units and canopy is **120-277 VAC 50-60 Hz**