


FIO

Housing: Solid acrylic glass rod, with Aluminum frame
 Design: SATTLER

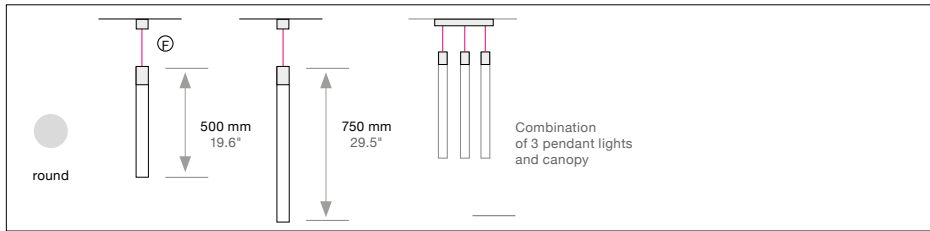

	Size: Ø / L mm	Inches	LED Watt	Lumen ¹	Weight kg / lbs ²	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
FIO Single	Ø 40, L 500 mm	Ø 2 L 19.6"	6.3	858	2.0 / 4.4	965.	X X.	X X.	X X.	X X.	X X X.	X
	Ø 40, L 750 mm	Ø 2 L 29.5"	6.3	858	2.5 / 5.5	968.	X X.	X X.	X X.	X X.	X X X.	X
FIO Set of 3	Ø 40, L 500 mm	Ø 2 L 19.6"	14.1	1290	4.0 / 8.8	966.	X X.	X X.	X X.	X X.	X X X.	X
	Ø 40, L 750 mm	Ø 2 L 29.5"	14.1	1290	5.0 / 11.0	967.	X X.	X X.	X X.	X X.	X X X.	X

LED Constant Current 200mA CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		Standard: Warm-white	3000 K	X X X.	30.	X X.	X X.	X X.	X X X.	X
		Optional: Neutral-white	4000 K	X X X.	40.	X X.	X X.	X X.	X X X.	X
		Optional: Extra warm-white	2700 K	X X X.	27.	X X.	X X.	X X.	X X X.	X

Dimming		Standard: 0-10 V	X X X.	X X.	11.	00.	X X.	X X X.	X
		Optional: DMX	X X X.	X X.	31.	00.	X X.	X X X.	X

Finish	Standard:		Optional:				X X X.	X X.	X X.	X X.	---	X X X.	X

Power supply cable		Z 80 black matte	Mounting version (E) with power supply cable, length 2000mm / 78.7", remote power supply ordered separately	X X X.	X X.	X X.	X X.	X X.	Z80.	F

Canopy:

DB 78/32 Cover Ø 78 mm / 3.0"
H 32 mm / 1.2"
Same Color as luminaire (60,62,65,66) **single version** IP 20

DBL 390 L x W x H 392 x 70 x 70 mm / 15.4 2.7 x 2.7" **set of 3** IP 10

Color: 12 white, similar RAL 9003, contact factory for other finishes

Canopy mounts to 4" octagonal junction box.

Included with Mounting version Protective rating

Complete order number

--- . --- . --- . **00.** --- . **Z80.** --- .

Remote driver required ordered separately:

Type / Size mm / inch L x W x H


0-10V: ECO30W-200 13.25" x 5" x 2.25"

DMX: PWR50W-200 13.25" x 5" x 2.25"

Input voltage for all external power supply units and canopy is **120-277 VAC 50-60 Hz**

TIA

Housing: Pendant light, solid Aluminum housing
 Design: SATTLER

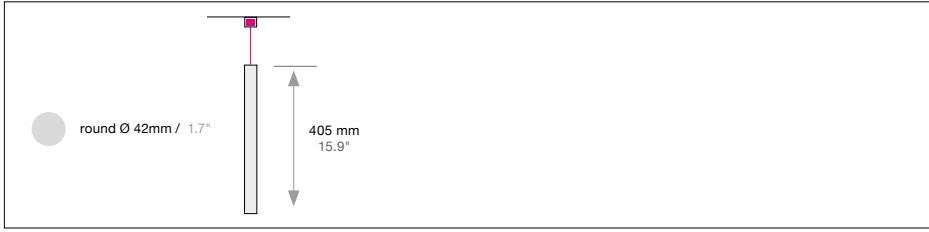

Size: Ø / L mm	Inches	LED	Watt	Lumen ¹	Weight kg ² /lbs ²	Beam angle	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
TIA Single Ø 42, L 405 mm	Ø 1.7 L 15.9"		6.3	659	1 / 2.2	24°	975.	x x .	x x .	x x .	x x .	x x x .	x

LED	Standard:	Warm-white	3000 K	x x x .	30.	x x .	x x .	x x .	x x x .	x
Constant Current 200mA	Optional:	Neutral-white	4000 K	x x x .	40.	x x .	x x .	x x .	x x x .	x
CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		Extra warm-white	2700 K	x x x .	27.	x x .	x x .	x x .	x x x .	x

Dimming	Standard:	0 - 10 V	x x x .	x x .	11.	00.	x x .	x x x .	x

Finish	Standard:	66	bronze anodized	Optional:	60	silver anodized	62	black anodized	65	champ. gold anodized	x x x .	x x .	x x .	x x .	--	x x x .	x
				Optional (Premium):	22	aluminum polished											

Power supply cable	Standard:	Z 80	black matte	x x x .	x x .	x x .	x x .	x x .	Z80 .	x

Mounting version	Suspension with canopy DB78/32 and 1 power supply cable 2000 mm / 78.7"	x x x .	x x .	x x .	x x .	x x .	x x .	x x .	x x .	x

Canopy:

DB 78/32 Cover Ø 78 mm / 3.0" H 32 mm / 1.2" same Color as luminaire (60,62,65,66) white 12 (22 polished)

Included with Mounting version **F (single version)** Protective rating **IP 20**

Complete order number

--- . --- . --- . **00.** --- . **Z80 .** _ .

Remote driver required ordered separately:

Type / Size mm / inch L x W x H

0-10V: ECO30W-200 13.25" x 5" x 2.25"

Input voltage for all external power supply units and canopy is **120-277 VAC 50-60 Hz**