


20 Linear Suspended

- Miniature suspended downlight for general, accent and decorative lighting.
- Power suspensions with small ceiling canopies.
- Multiple distribution options.
- 90+ CRI, 3 Steps MacAdam delivering excellent color rendering.
- Choice of White, RGBW and Warm Dim to emulate incandescent.
- Identical LED technology used throughout all Whitegoods Linears, Coves and Perimeter products deliver consistent quality and performance throughout a project.
- Made in USA.
- 5-year warranty.




Suspended (S)


Housing	Precision extruded aluminum for true dimensions and tolerances Lengths from 12"-72" single luminaires Finishes: white, black, silver and custom
Integration	Suspension from any surface
Distribution	Multiple lenses and louvers for general, accent, decorative and grazing application
LED	Constant Voltage, 90+ CRI, 3 Steps MacAdam 120 nominal lumens/watt average (see spec sheet for delivered lumens) Warm Dim to emulate incandescent when dimming; 75 nominal lumens per watt average RGBW for color changing applications; 50 nominal lumens per watt average L70 (TM21 Projected 85C) Static White = 60,000 hours RGBW = 50,000 hours, WD = 36,000 hours
Lens	OD - Opal Diffuser provides even, continuous line of light and general illumination MPL - Micro-prismatic lens provides lower brightness, general illumination NL16 - Narrow Lens optic provides narrow beam for wall grazing applications LL45 - 45 Degree Louver in white, black or satin provides extreme low brightness BD - Block Diffuser of satin acrylic provides general illumination and decorative effect ROD - Round Opal Diffuser 0.8" diameter provides general illumination
Driver	Compatible with quality constant voltage drivers
Weight	0.5lbs per foot
Operating Temp	Suitable for operation in maximum ambient temperature of 35C (95F)
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE
Voltages	24V Fixture / 120-277VAC Driver (remote)

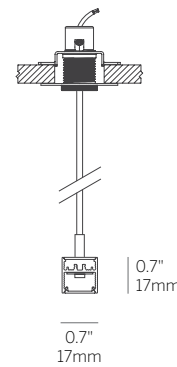

Gypsum /Tile Ceiling



Solid Ceiling



Power Feed

Lenses/Accessories



20 Linear Suspended

Model	Fixation	Pattern	Length	Power ¹	CRI/ CCT ²	Driver ³	Lens	Finish ⁶	Options
WG-20LDL	S48 (std) S96	S	A	L M H	927 930 935 940 WD RGBW	X S D010 DPH L3DAE L3DOE EL96 DMX	OD (std) MPL NL16 LL45B ⁴ LL45W ⁴ LL45S ⁴ BDO ⁵ BDC ⁵ ROD ⁵	W (std) B S F	EM

Model

- WG-20LDL-S = 20 Linear Suspended

Fixation

- S48 = 48" suspension cable standard, field-cuttable (standard)
- S96 = 96" suspension cable, field-cuttable (above 60" additional suspension added)

Pattern

- S = Straight run (individual fixtures only, for other configurations see WG-20LDI)

Length

- A = specify inches to the nearest 0.25" (i.e. 71.75") (72" max length)

Power¹

- L = 3W/ft low power (WD 2.7 W/ft) (24V)
- M = 6W/ft mid power (WD 5.5 W/ft) (24V) (RGBW - 7.6 W/ft)
- H = 10W/ft high power (WD 8 W/ft) (24V)

CRI/CCT (90+ CRI)²

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- WD = Warm Dimming 1800 - 3000K
- RGBW = 3000K White (M power only)

Driver (remote)³

- X = No driver, ordered separately
- S = Standard, non-dim driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- DPH = Phase Dimming, 1% dimming, 120V only
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- EL96 = Osram / EldoLED, 24V, 0.1% 0-10V Dimming
- DMX = Osram / EldoLED, 24V, 0.1% DMX Dimming

Lens

- OD = Satin opal diffuser (standard)
- MPL = Micro-prismatic lens
- NL16 = Linear narrow lens, 16°
- LL45B = Linear louver black⁴
- LL45W = Linear louver white⁴
- LL45S = Linear louver satin⁴
- BDO = Block Diffuser Opal⁵
- BDC = Block Diffuser Clear⁵
- ROD = Round opal diffuser⁵

Finish⁶

- W = White, 15% gloss, RAL 9010 / Tiger Drylac 009/10120 (standard)
- B = Black, 15% gloss, RAL 9005 / Tiger Drylac 044/90053
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 049/90500
- F = Custom finished trim, specify RAL

Options

- EM = Emergency (remote)

Whitegoods reserves the right to change any information without prior notice.

Notes

- 1 Wattage shown is for LED boards only, system wattage varies depending on driver selected.
- 2 Refer to specsheet for delivered lumen data for all product configurations.
- 3 Remote power supply required. See power supply page for details.
- 4 Louver available in 4.75" increments, straight runs only.
- 5 Butt seam (lens) when in continuous run, straight runs only.
- 6 See Tiger Drylac color chart: inter-lux.com/tiger