



U060 LIGHTWAY

ASYMMETRICAL LINEAR LENS WASHER / PENDANT

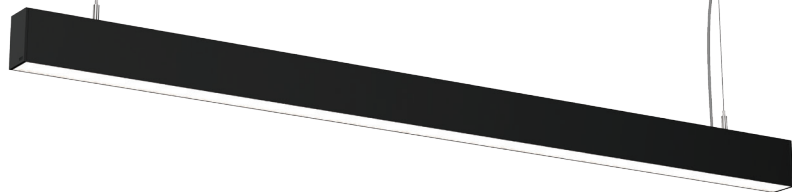

Flush lens delivers the best wall uniformity
Wide lateral illumination with minimal cut-off
Setback ratio 1:6
Install to within 18" of side walls to minimize spill

Section drawing (inch)

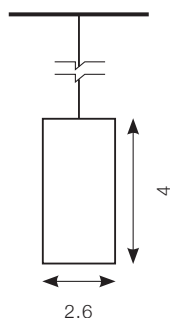

Notes

- Total connected load: including driver + LED power consumption
- Aircraft cable suspension – 6' field adjustable standard
- Power cables and canopies match the fixture finish – 6' field adjustable standard: Black, White, Grey

inter•lux

U060	PD	WL	XX	-----
Profile	Mounting	Optic	Beam	LED inserts

-	40	-	N	I	----
Dimming	IP	Body finish	Emergency	Layout	Length

Profile	U060:	Profile 2.6 inch width
Mounting	PD:	Pendant
Optic	WL:	Asymmetrical linear lens
Beam	XX:	No beam angle
IP	40:	IP40
Emergency	N:	No emergency
Layout	I:	Linear straight run

LED inserts

(Mid-Power LED - CRI 80+)

2700°K	827L2:	4.6 W/ft, 523 lm/ft
	827L3:	6.7 W/ft, 722 lm/ft
	827L4:	9.2 W/ft, 1047 lm/ft
	827L5:	13.1 W/ft, 1443 lm/ft
3000°K	830L2:	4.6 W/ft, 552 lm/ft
	830L3:	6.7 W/ft, 762 lm/ft
	830L4:	9.2 W/ft, 1104 lm/ft
	830L5:	13.1 W/ft, 1523 lm/ft
3500°K	835L2:	4.6 W/ft, 561 lm/ft
	835L3:	6.7 W/ft, 774 lm/ft
	835L4:	9.2 W/ft, 1123 lm/ft
	835L5:	13.1 W/ft, 1548 lm/ft

Total connected load (W/ft) - Delivered Lumen (lm/ft)

Dimming

Integral driver

- C:** Non-Dim integral
 - D:** Lutron - remote only
 - E:** 0-10V dim integral
- (Other dimming protocol are available upon request)

Body Finish

- B:** Black
- W:** White
- G:** Gray

Length (inch)

12 - 24 - 35 - 47 - 59 - 70 - 82 - 93 - 105

(For all 12 inch modules, driver is remote)

Electrical Data

120 - 277V	Power range
------------	-------------

VICE

410 381 1497 inter-lux.com answers@inter-lux.com
Inter-lux reserves the right to make technical changes without notice.

