

AVVENI PENDANT 5




inter•lux



Product information: Aluminum structure with five light heads. Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (9 degree beam angle with lenses for 25, 36, and 60 degrees). Cable suspensions are adjustable.

Design: Ulrich Sattler | Michael Schmidt, Code2design

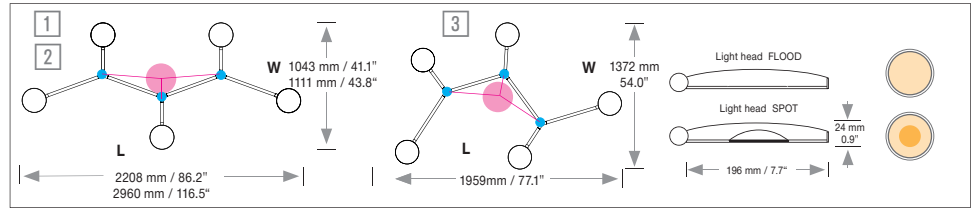


STRUCTURE

Type	L / W mm	L / W inches	LED Watt	weight kg ²⁾ / lbs ²⁾
1	L 2208 / W 1043	L 86.2" / W 41.1	max. 95 W	4.5 / 9.9
2	L 2960 / W 1111	L 116.5" / W 43.8	max. 95 W	4.7 / 10.4
3	L 1959 / W 1372	L 77.1" / W 54.0	max. 95 W	4.5 / 9.9

STRUCTURE

Type No.	Finish 1	DIM.	Power Supply Cable	Mounting Version
1128.	XX.	XX.	XX.	XX.
1129.	XX.	XX.	XX.	XX.
1130.	XX.	XX.	XX.	XX.
Standard	12 white matte RAL 9003	14 black matte	22 aluminum polished	Standard
Dimming	0-10 V	Standard	70	05
Power Supply Cable	power supply cable, silver 196.8", mounting version (B) without power supply cable, current-carrying suspension 118.1" (F+R)		Standard	70
Mounting Version	Standard		70	00

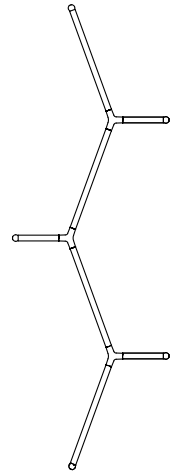

Finish 1 Structure	12 white matte RAL 9003	14 black matte	22 aluminum polished
--------------------	-------------------------	----------------	----------------------

Dimming	0-10 V	Standard
---------	--------	----------


Power Supply Cable	power supply cable, silver 196.8", mounting version (B) without power supply cable, current-carrying suspension 118.1" (F+R)	Standard
--------------------	------------------------------------------------------------------------------------------------------------------------------	----------

Mounting Version	B Standard	F	R
	Suspension with 3 steel cables 196.8" and external power supply unit in separate canopy or suspended ceiling	Suspension with canopy and 3 current-carrying steel cables 118.1"	Suspension with 3 current-carrying steel cables 118.1" and 3 cavity wall boxes, power supply in suspended ceiling

Order No. STRUCTURE:

LIGHT HEAD

Type	Finish 2 Light head outside ring	Finish 3 Light head top cover	LED	LIGHT HEAD					
				Type No.	Finish 2	Finish 3	LED Kelvin	Beam angle	
01	12 white matte RAL 9003	60 silver anodized	2700 K	XX.	XX.	XX.	XX.	XX.	XX.
	62 (14) black matte	61 gold anodized	3000 K	XX.	12	XX.	XX.	XX.	XX.
	22 aluminum polished	62 black anodized	4000 K	XX.	62	XX.	XX.	XX.	XX.
	Finish 2 must be the same as finish 1			XX.	22	XX.	XX.	XX.	XX.
				XX.		60	XX.	XX.	XX.
				XX.		61	XX.	XX.	XX.
				XX.		62	XX.	XX.	XX.
				XX.		27	XX.	XX.	XX.
				XX.		30	XX.	XX.	XX.
				XX.		40	XX.	XX.	XX.
				XX.		99	00	00	00
				XX.		09	00	00	00
				XX.		25	00	00	00
				XX.		36	00	00	00
				XX.		60	00	00	00

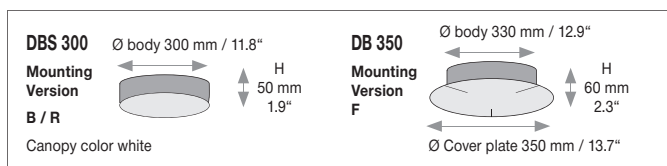

Input voltage for all external power supply units and canopies is 120-277 VAC 50/60 Hz

Below orange sections are optional - see page 2 for complete list of accessories. Note, flood and spot heads may be mixed within one structure.

Quantity Order No. LIGHT HEAD FLOOD


Quantity Order No. LIGHT HEAD SPOT

Quantity Order No. Accessories (page 2)

SATTLER

410 381 1497 answers@inter-lux.com
inter-lux reserves the right to make technical changes without notice

IP 20




Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08

1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient Temperature of max. 35° Celsius / 95° Fahrenheit. 2) Weight of lights without remote technical unit or canopy.

SNAP SYSTEM



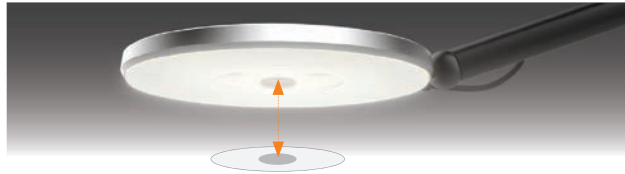



Snap-on lenses only applicable for AVVENI LIGHT HEAD SPOT.



BEAM ANGLE LENSES

Spot-light lenses* magnetic snap-on lenses to change the beam angle

Type No.:

	25°		NFL	1163. 00. 00. 00. 00
	36°		FL	1164. 00. 00. 00. 00
	60°		WFL	1165. 00. 00. 00. 00
















Elliptical lens* magnetic snap-on lenses for asymmetrical light beam

	10-36°		Ellipse	1166. 00. 00. 00. 00
-----------------------------------------------------------------------------------	---------------	-----------------------------------------------------------------------------------	---------	-----------------------------

*approx. 10% reduction of the lumen output

LIGHT Color LENSES

Color Temperature lenses* magnetic snap-on lenses that shift color Temperature

Starting light color KELVIN (K)	2700 	3000 	4000 	
CTO 1/4	 2450 	2700 	3500 	1160. 00. 00. 00. 00
CTO 1/2	 2200 	2400 	3000 	1161. 00. 00. 00. 00
CTO 3/4	 2000 	2200 	2700 	1162. 00. 00. 00. 00

*reduction of the lumen output : CTO 1/4 = 10%, CTO 1/2 = 25%, CTO 3/4 = 40%

ANTI GLARE PROTECTION

Louver snap - magnetic snap-on adaptor to eliminate high angle glare




1167. 00. 00. 00. 00

LENS SETS

Complete set:	3 x spot-light lenses, 1 x elliptical lens, 3 x light color lenses, 1 x anti glare protection	1171. 00. 00. 00. 00
Beam Angle Set:	3 x spot-light lenses, 25°, 36°, 60°	1172. 00. 00. 00. 00
Light Color Set:	3 x light color lenses, CTO 1/4, CTO 1/2, CTO 3/4	1173. 00. 00. 00. 00

Combinations of up to three lenses are possible

Ceiling Fixation



Consisting of a cavity ceiling box with 80mm round metal cover.
Applicable to mounting version B. white

200. 00. 00. 00. 11