


AVVENI

PENDANT 6 | 8




Product information: Aluminum structure with six / eight light heads. Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (9 degree beam angle with lenses for 25, 36, and 60 degrees). Cable suspensions are adjustable.

Design: Ulrich Sattler | Michael Schmidt, Code2design

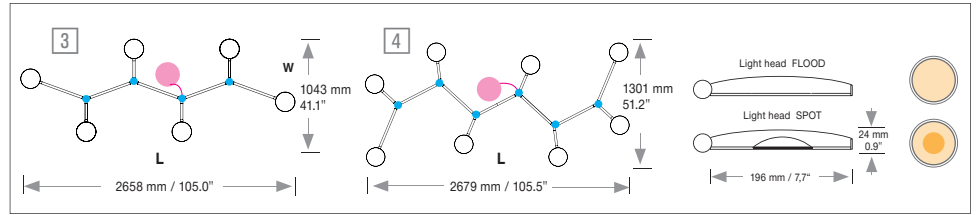

STRUCTURE

Type	L / W mm	L / W inches	LED Watt	weight kg ²⁾ / lbs ²⁾	STRUCTURE				
					Type No.	Finish 1	DIM.	Power Supply Cable	Mounting Version
	3 L 2658 / W 1043	L 105.0 / W 41.1"	max. 114 W	5.3 / 11.7	1135.	XX.	XX.	XX.	XX.
	4 L 2679 / W 1301	L 105.5 / W 51.2"	max. 152 W	7.1 / 15.7	1140.	XX.	XX.	XX.	XX.
Finish 1 Structure	12 white matte RAL 9003	14 black matte	22 aluminum polished	Standard	XXXX.	12	XX.	XX.	XX.
Dimming	0-10 V			Standard	XXXX.	XX.	05	XX.	XX.
Cable	power supply cable, silver 196.8"			Standard	XXXX.	XX.	XX.	70	XX.
Mounting Version	B Standard			Standard	XXXX.	XX.	XX.	XX.	0B

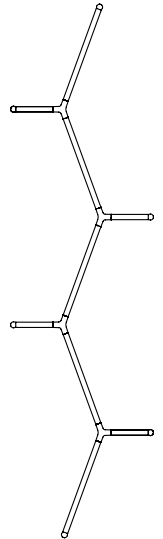

Suspension with 4 / 6 steel cables 196.8" and external power supply unit in separate canopy or suspended ceiling

Order No. STRUCTURE

▶

LIGHT HEAD


Type	Finish 2	Finish 3	LED	LIGHT HEAD							
				Kelvin	Beam angle						
Type	01	XX.	XX.	XX.	XX.	XX.	XX.				
Finish 2 Light head outside ring	12 white matte RAL 9003	62 (14) black matte	22 aluminum polished	Standard	XX.	12	XX.	XX.	XX.	XX.	XX.
	Finish 2 must be the same as finish 1				XX.	62	XX.	XX.	XX.	XX.	
	XX.	22	XX.	XX.	XX.	XX.	XX.	XX.	XX.	XX.	
Finish 3 Light head top cover	60 silver anodized	61 gold anodized	62 black anodized	Standard	XX.	XX.	60	XX.	XX.	XX.	XX.
	XX.	XX.	61	XX.	XX.	XX.	XX.	XX.	XX.	XX.	
	XX.	XX.	62	XX.	XX.	XX.	XX.	XX.	XX.	XX.	
LED 36V, CRI >95		Extra warm-white 2700 K	Warm-white 3000 K	Neutral-white 4000 K	XX.	XX.	XX.	27	XX.	XX.	XX.
					XX.	XX.	XX.	30	XX.	XX.	XX.
					XX.	XX.	XX.	40	XX.	XX.	XX.
Beam Angle	FLOOD 6 / 8 x 17 W 1344 ¹ Lumen			Standard	XX.	XX.	XX.	XX.	99	00	00
	SPOT 9° 19 W 1268 ¹ Lumen				XX.	XX.	XX.	XX.	09	00	00
Spot 15.5 W, General Light 3.5 W	*NFL 25° 19 W 1174 ¹ Lumen				XX.	XX.	XX.	XX.	25	00	00
	*FL 36° 19 W 1174 ¹ Lumen				XX.	XX.	XX.	XX.	36	00	00
	*WFL 60° 19 W 1174 ¹ Lumen				XX.	XX.	XX.	XX.	60	00	00

Below orange sections are optional - see page 2 for complete list of accessories. Note, flood and spot heads may be mixed within one structure.

Quantity Order No. LIGHT HEAD FLOOD ▶

Quantity Order No. LIGHT HEAD SPOT ▶

Quantity Order No. Accessories (page 2) ▶

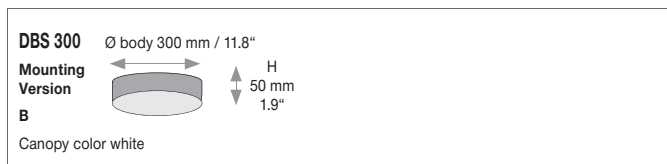


Input voltage for all external power supply units and canopies is 120-277 VAC 50/60 Hz

AVVENI ACCESSORIES





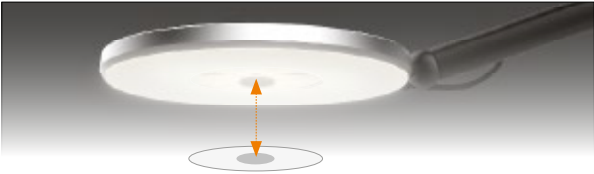

SNAP SYSTEM

Snap-on lenses only applicable for AVVENI LIGHT HEAD SPOT.



BEAM ANGLE LENSES

Spot-light lenses* magnetic snap-on lenses to change the beam angle

	17°		Spot	Type No.:	1174. 00. 00. 00. 00
	25°		NFL		1163. 00. 00. 00. 00
	36°		FL		1164. 00. 00. 00. 00
	60°		WFL		1165. 00. 00. 00. 00
	13°		Spot asymmetrical 0-20°, consisting of 2 lenses		1177. 00. 00. 00. 00

Elliptical lens* magnetic snap-on lenses for asymmetrical light beam

	10-36°		Ellipse*		1166. 00. 00. 00. 00
	10-60°		Ellipse*		1175. 00. 00. 00. 00
















Square lens* magnetic snap-on lenses for square light beam

	36°-36°		Square*		1176. 00. 00. 00. 00
--	----------------	--	---------	--	-----------------------------

*approx. 10% reduction of the lumen output

LIGHT COLOR LENSES

Color temperatur lenses* magnetic snap-on lenses that shift color temperature

Starting light color KELVIN (K)	2700 	3000 	4000 	
CTO 1/4	 2450 	2700 	3500 	1160. 00. 00. 00. 00
CTO 1/2	 2200 	2400 	3000 	1161. 00. 00. 00. 00
CTO 3/4	 2000 	2200 	2700 	1162. 00. 00. 00. 00

*reduction of the lumen output : CTO 1/4 = 10%, CTO 1/2 = 25%, CTO 3/4 = 40%

LOUVER (ANTI GLARE PROTECTION)

Louver snap - magnetic snap-on adaptor to eliminate high angle glare


		1167. 00. 00. 00. 00
---	--	-----------------------------

LENS SETS

Complete set:	3 x spot-light lenses 25°, 36°, 60°, 1 x elliptical lens 10-36°, 3 x light color lenses, 1 x louver	1171. 00. 00. 00. 00
Beam Angle Set:	3 x spot-light lenses 25°, 36°, 60°	1172. 00. 00. 00. 00
Light Color Set:	3 x light color lenses CTO 1/4, CTO 1/2, CTO 3/4	1173. 00. 00. 00. 00

Combinations of up to three lenses are possible

Ceiling Mounting



Consisting of a cavity ceiling box with 3.1" (80mm) round metal cover. Applicable to mounting version B. white

200. 00. 00. 00. 11