


Wiring

Series Wiring

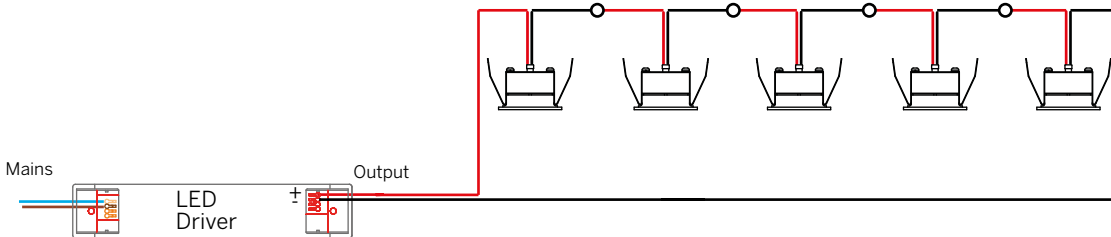


Note that while constant current light sources can be wired in series, the number of fittings that can be wired in series is limited by the forward voltage and wattage of the LED.

Each Iris is supplied with 1 x Star LEDs which have a total forward voltage of 2.9V and wattage of 2W when driven at 700mA.

IP68 connectors recommended. Driver specified separately.

Mounting

Recessed Mounting with Spring Clip (RM)

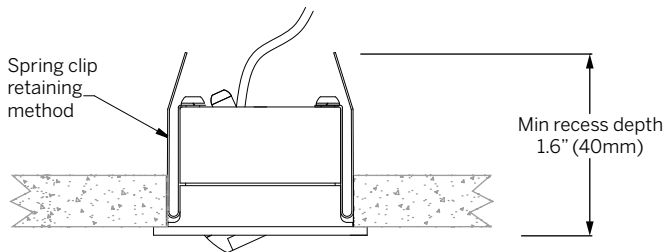

Recessed Mounting with Retaining Ring (RR)

