


SLIM ELLIPSE  
DIRECT

Housing: Aluminum profile with integrated opal diffuser  
Design: SATTLER

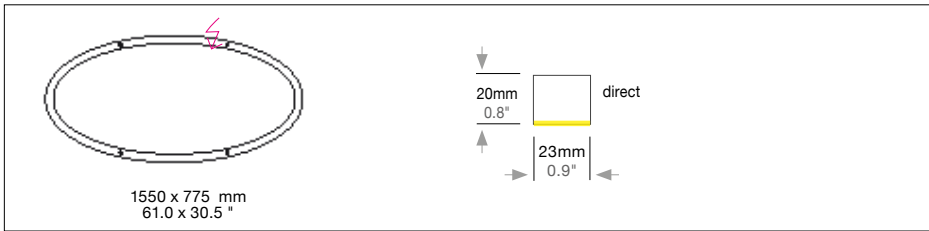

Size: L x W x H mm	Inches	LED Watt	Lumen <sup>1</sup>	Weight kg/lbs <sup>2</sup>	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version	
1550 x 775 x 20	61.0 x 30.5 x 0.8	70	4107	6 / 13.2	<b>738.</b>	x x.	x x.	x x.	x x.	x x x.	x	
<b>LED</b> 24V		<b>Standard: Warm-white</b>	<b>3000 K</b>	x x x.	<b>30.</b>	x x.	x x.	x x.	x x x.	x		
CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		<b>Optional:</b>	Natural-white 3500 K Neutral-white 4000 K Extra warm-white 2700 K RGB Color control* <small>*only in combination with DMX.</small>	x x x. x x x. x x x. x x x.	<b>35.</b> <b>40.</b> <b>27.</b> <b>60.</b>	x x. x x. x x. x x.	x x. x x. x x. x x.	x x. x x. x x. x x.	x x x. x x x. x x x. x x x.	x x x x		
<b>Dimming</b>		<b>Standard: 0 - 10 V</b>		x x x.	x x.	<b>51.</b>	<b>00.</b>	x x.	x x x.	x		
		<b>Optional:</b>	Lutron EcoSystem <sup>A,G,R,K</sup> DMX	x x x. x x x.	x x. x x.	<b>91.</b> <b>31.</b>	<b>00.</b> <b>00.</b>	x x. x x.	x x x. x x x.	x x		
<b>Finish</b>		<b>Standard:</b>	<b>12</b> white, powder coated, similar to RAL 9003	<b>Optional (Powder coated):</b>	<b>10</b> black fine textured <b>11</b> white, similar to RAL 9010 <b>30</b> anthracite fine textured <b>33</b> sand silver fine textured <b>34</b> bronze satined <b>35</b> gold <b>36</b> brass <b>37</b> bronze fine textured <b>38</b> copper	x x x.	x x.	x x.	x x.	---	x x x.	x
		<b>Optional (Premium):</b>	<b>22</b> aluminum polished <b>27</b> brush-finished aluminum <b>66*</b> bronze anodized brushed <b>65*</b> champ. gold anodized brushed									
<b>Power supply cable</b>		<b>Standard:</b>	<b>Z 70</b> silver	<b>Optional:</b>	<b>Z 71</b> white <b>Z 73</b> black							
		<b>000</b> Current-carrying F, R, T, K				x x x.	x x.	x x.	x x.	x x.	---	x

7.2024 SLIM ELLIPSE - DIRECT




410 381 1497 inter-lux.com answers@inter-lux.com  
inter-lux reserves the right to make technical changes without notice

IP 50 Light distribution direct Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08


Technical data is subject to change. Errors and omissions excepted 1. Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. 2. Weight of lights without remote technical unit or canopy.

## SLIM ELLIPSE DIRECT


Housing: Elliptical Aluminum profile with integrated opal diffuser  
Design: SATTLER

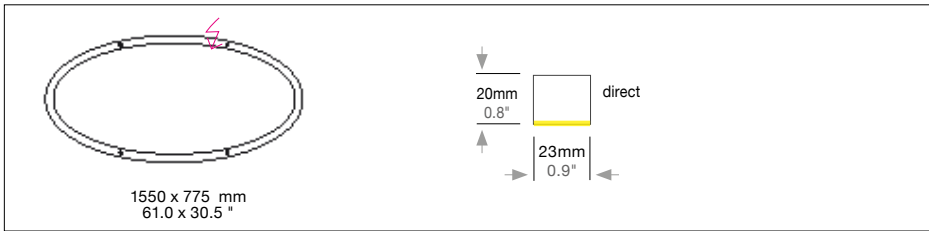


### Mounting version




4-point suspension with external power supply unit in suspended ceiling.




4-point suspension with external power supply unit in separate canopy.




Suspension through canopy.




4 current-carrying steel cables. Not in combination with RGB.




Suspension with current-carrying steel cables and cavity wall box. Not in combination with RGB.




Suspension with pendant canopy PB 375 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" 25' ceiling height recommended.



Suspension with pendant canopy PB 375 and current-carrying steel cables. (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" Not in combination with RGB. 25' ceiling height recommended.



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling.



Suspension point as clamping unit with 4 cables and remote technical unit in suspended ceiling. Not in combination with RGB.

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-

-	-	-	-	-	-	-
---	---	---	---	---	---	---

Complete order number

A, B, G, R, K = Distance of external power supply unit to light fixture max. 10m / 394".

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 3000mm/118" and/or power supply cable 3000mm/118" version S,T 5000 + 3000mm / 197"+118"

Power supply unit:		Type / Size mm / inch L x W x H	Included with Mounting version	Protective rating
	DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A,G,R,K	IP 20


Input voltage for all external power supply units and canopy is 120-277 VAC 50-60 Hz

Canopy:		Type / Size mm / inch Ø cover plate / body / H	Included with Mounting version	Protective rating
	DB 290	Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F	IP 20
	PB 375	Ø 90 H 375 mm / 3.5 x 14.8"	S, T	IP 20
	DB 145	Ø 145 / 133 / 55 mm / 5.7 x 5.2 / 2.2"	K	IP 20

Ø body 90 mm / 3.5"

Color: 12 white, similar RAL 9003, contact factory for other finishes  
Canopy mounts to 4" octagonal junction box.

### Optional



Power cable cover plate for mounting version A, G

200. 00. 00. 00. 12. (white)

Consisting of a cavity ceiling box with 3.1" (80mm) round metal cover. Included with mounting version A, G.