

Envelope_1

Rectangular shape
180° optic
45° orientation

Wall recessed lighting fixture with **minimal flange** to be used as path marker

Installed at 12 to 16 inches from ground, it directs the **visual focus** only on the intended area.

Impressive controlled lighting that does not generate light pollution

Envelope

inter•lux

A wall light **illuminating indoors** (walls, ceilings) or **particularly valuable pieces of furniture with style**. Extremely versatile, it comes in three versions: single emission (also suitable as outdoor path marker), double emission or four-way emission.

Light distribution


Available in three versions with single, double or four-way emission

IP66


It can be installed on outdoor applications (single-emission version only)

Easy installation


Mounting with springs for drywall, or with outer casing in masonry/ concrete applications

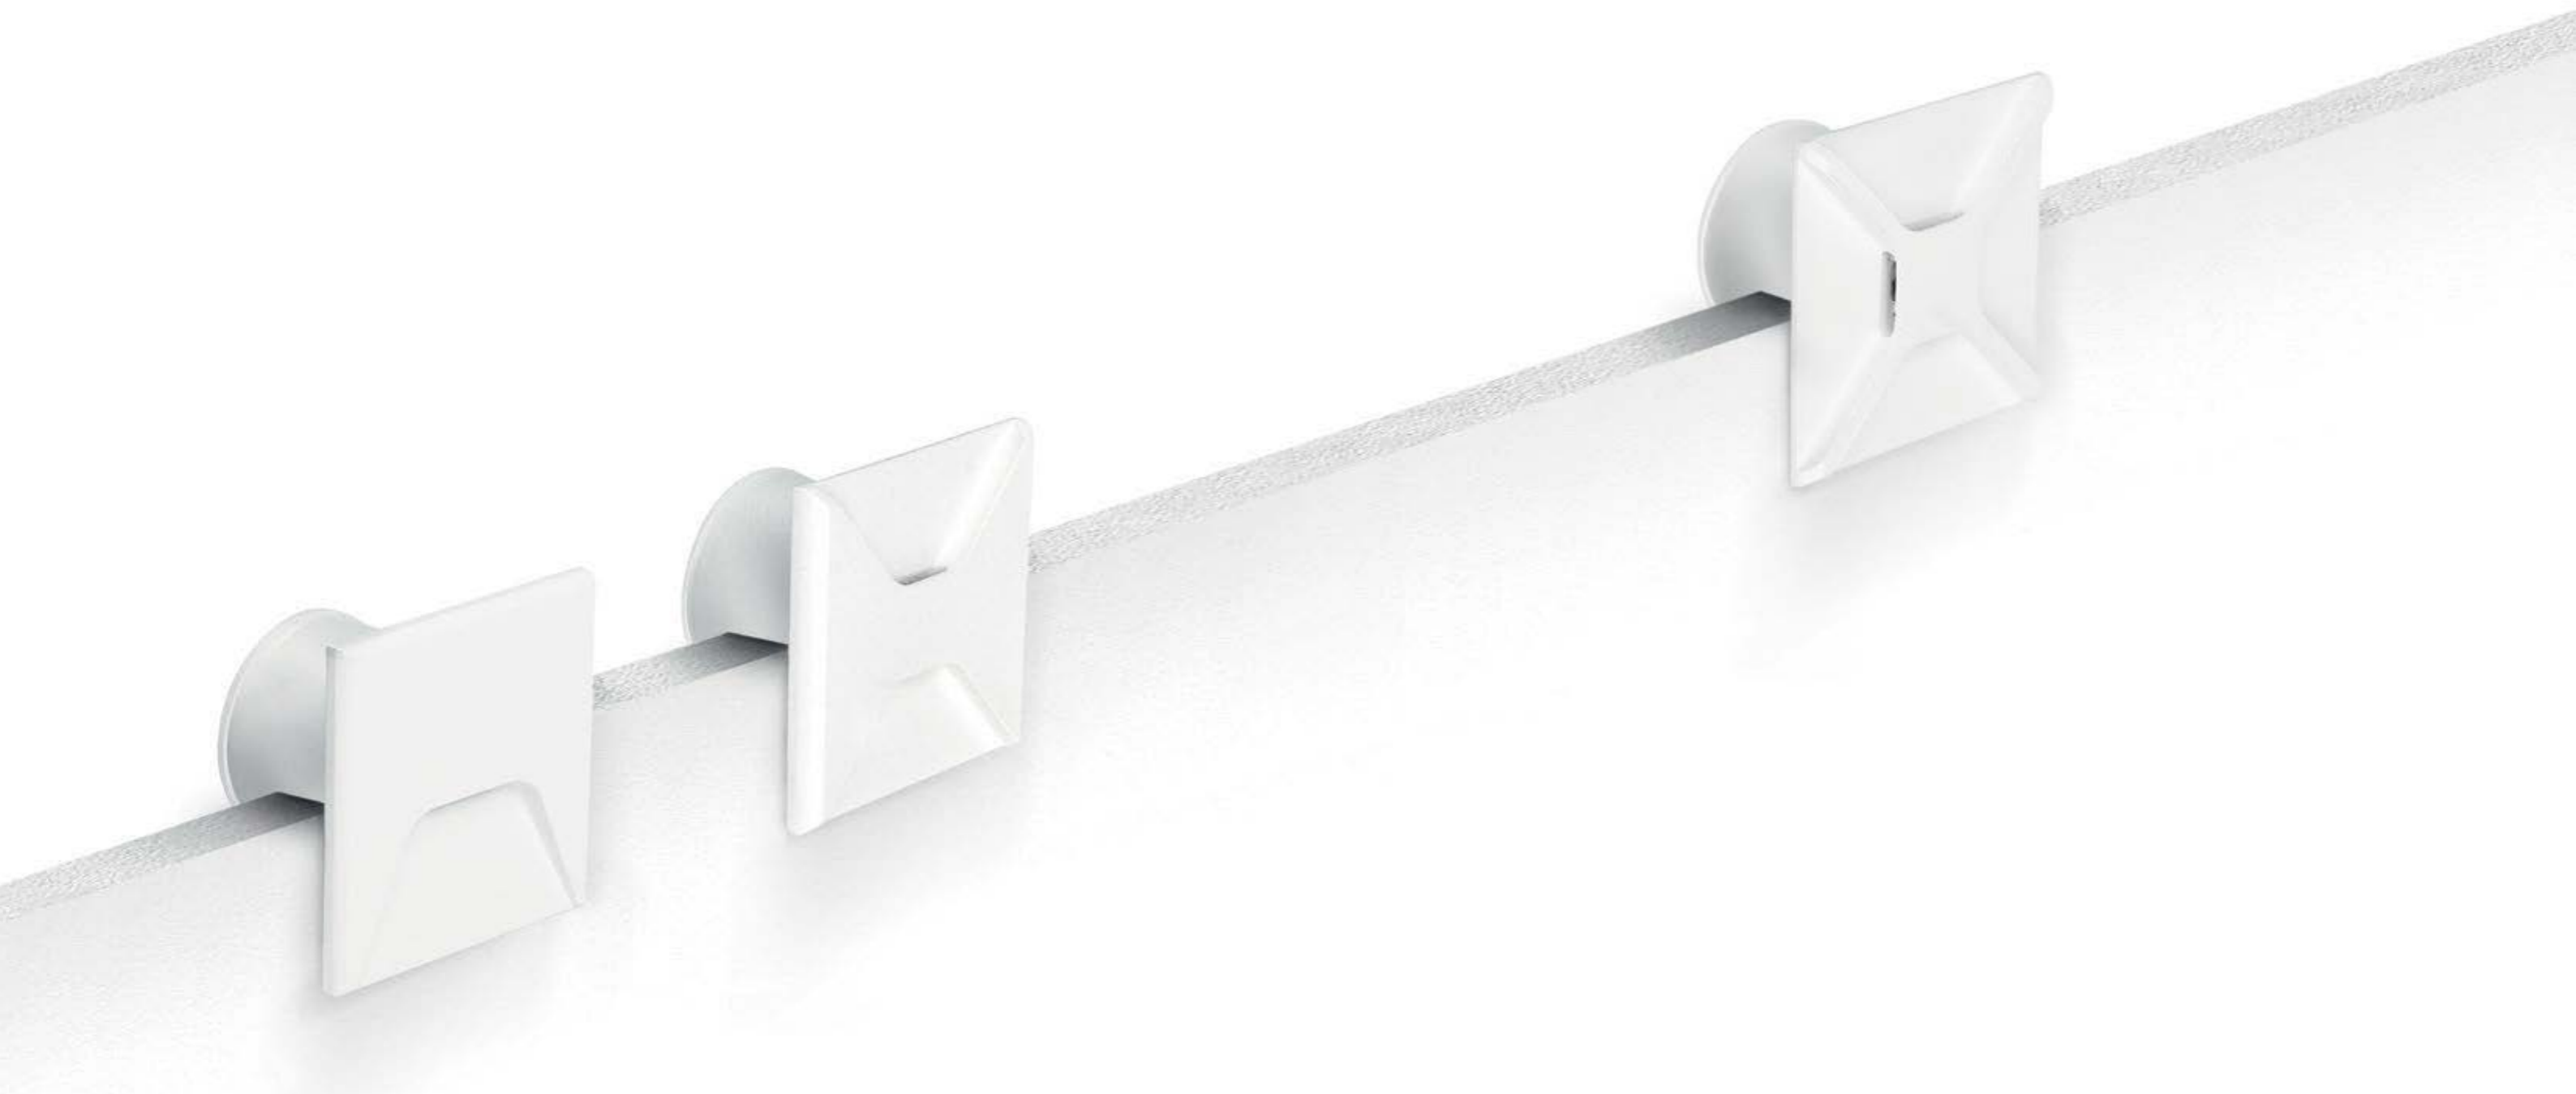

Envelope_1 | Path-marker | powerLED 1W 350 mA



11




type		color		optic	
White	CRI 80	E96976	3000 K	145 lm	W 180° 18
Black	CRI 80	E96977	3500 K	145 lm	T
Grey	CRI 80	E96978	4000 K	155 lm	N
Cor-Ten	CRI 80	E96979			


power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350	84336	84915
0-10V EidoLED ECOdrive 30W, for 1-10 fixtures	0-10V EidoLED SOLOdrive 50W, for 1-20 fixtures	0-10VEidoLED SOLOdrive 100W, for 1-40 fixtures	Masonry outer casing (optional)	Concrete pour outer casing (optional)

Envelope_2 | Path-marker | powerLED 1W 350 mA



11




type		color		optic	
White	CRI 80	E96971	3000 K	145 lm	W 180° 18
Black	CRI 80	E96972	3500 K	145 lm	T
Grey	CRI 80	E96973	4000 K	155 lm	N
Cor-Ten	CRI 80	E96974			


power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350	84336	84915
0-10V EidoLED ECOdrive 30W, for 1-10 fixtures	0-10V EidoLED SOLOdrive 50W, for 1-20 fixtures	0-10VEidoLED SOLOdrive 100W, for 1-40 fixtures	Masonry outer casing (optional)	Concrete pour outer casing (optional)

Envelope_4 | Path-marker | powerLED 1W 350 mA



11



type		color		optic	
White	CRI 80	E96966	3000 K	145 lm	W 180° 18
Black	CRI 80	E96967	3500 K	145 lm	T
Grey	CRI 80	E96968	4000 K	155 lm	N
Cor-Ten	CRI 80	E96969			

power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350	84336	84915
0-10V EidoLED ECOdrive 30W, for 1-10 fixtures	0-10V EidoLED SOLOdrive 50W, for 1-20 fixtures	0-10VEidoLED SOLOdrive 100W, for 1-40 fixtures	Masonry outer casing (optional)	Concrete pour outer casing (optional)



Petit


inter•lux

A minimalist stainless steel or brass wall light with a square or round shape. Its **extremely reduced emission width** decorates the spaces creating **small light details**, shining cuts complementing the most significant architectural elements.



Passive heat dissipation
Brass or Aluminum casing

Versatile
Round or square in different power levels and sizes, finishes and color temperatures for customizable lighting

Minimalist aesthetics
The design of the square and circle is direct and universal

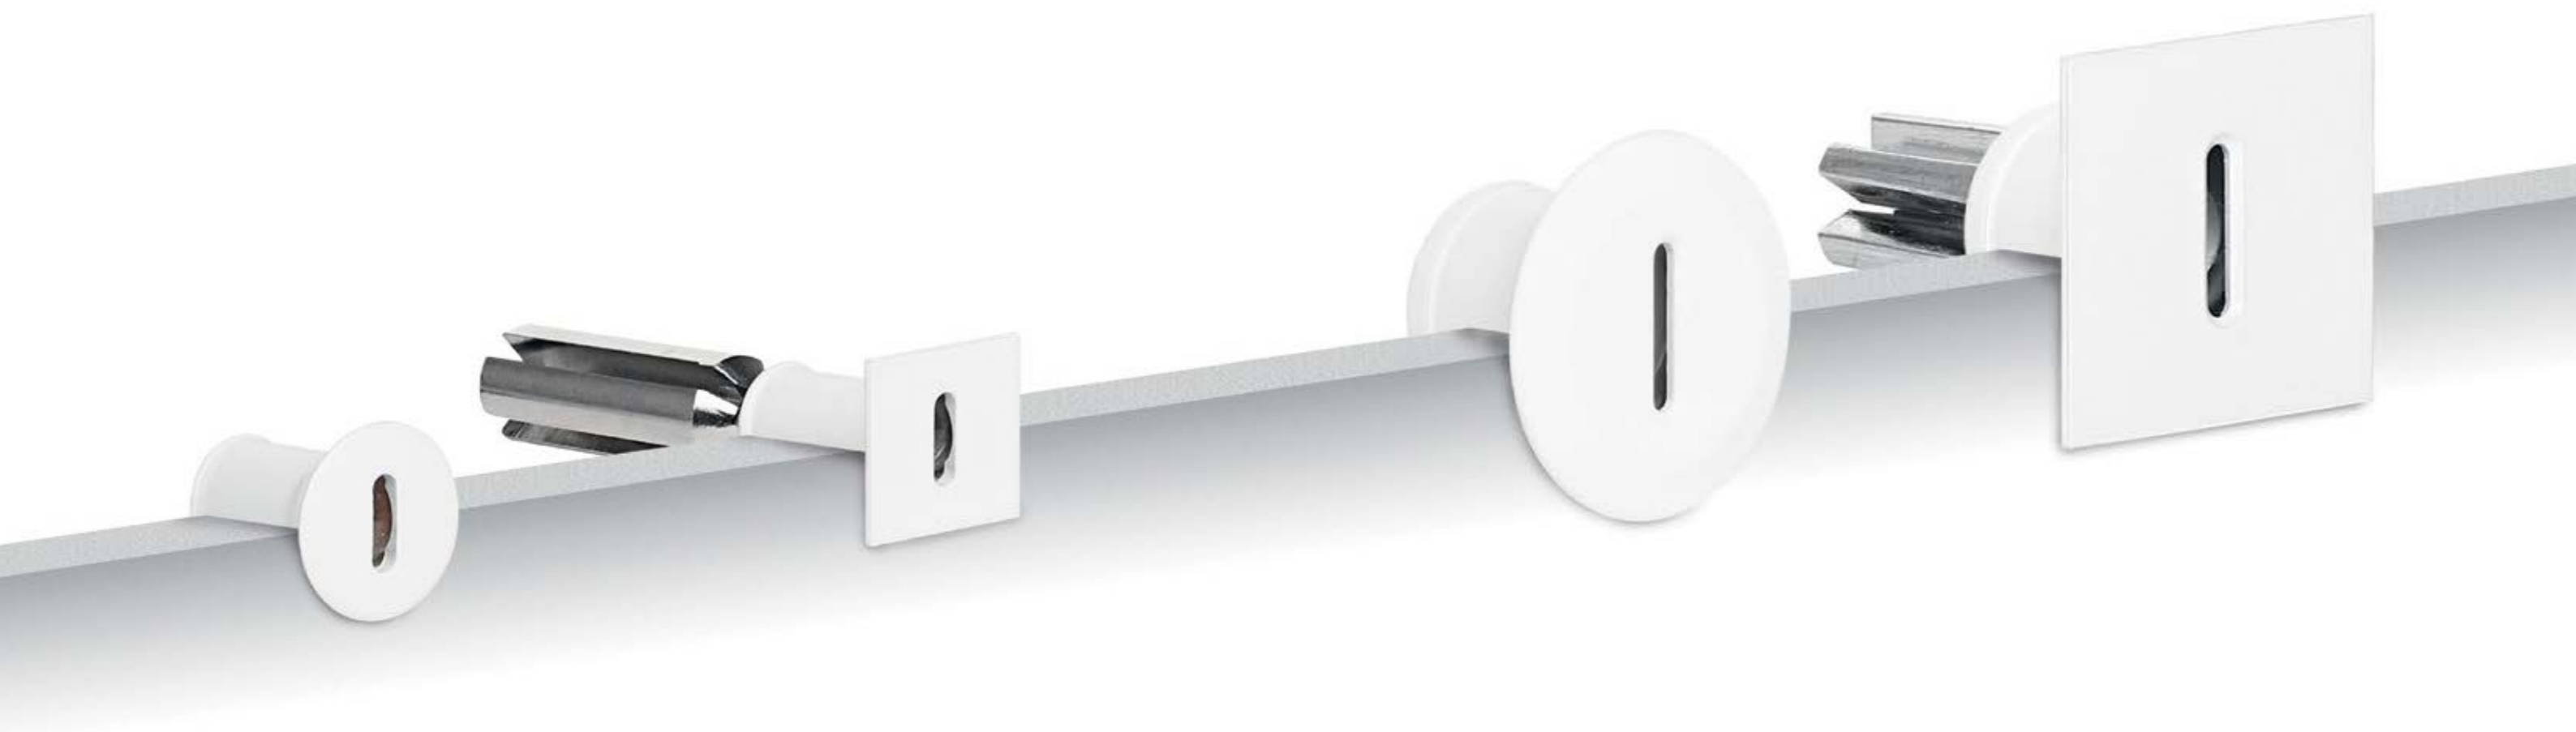

Petit_R | Path-marker | powerLED 1W 350 mA

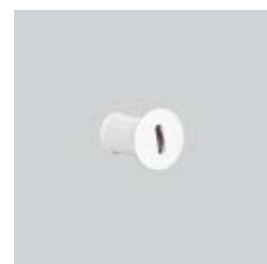


0.6


type		color		optic	
White	CRI 80 E92316	3000 K	107 lm	W	5° 05
Chrome	CRI 80 E92317	4000 K	114 lm	N	
Nickel	CRI 80 E92318				

power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350	84335
0-10V EidoLED ECOdrive 30W, for 1-10 fixtures	0-10V EidoLED SOLOdrive 50W, for 1-20 fixtures	0-10VEidoLED SOLOdrive 100W, for 1-40 fixtures	Concrete pour outer casing (optional)



Petit_2R | Path-marker | powerLED 1W 350 mA




1.1


type		color		optic	
White	CRI 80 E92405	3000 K	145 lm	W	5° 05
Chrome	CRI 80 E92406	4000 K	155 lm	N	
Nickel	CRI 80 E92407				

power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350	84915	84336
0-10V EidoLED ECOdrive 30W, for 1-10 fixtures	0-10V EidoLED SOLOdrive 50W, for 1-20 fixtures	0-10VEidoLED SOLOdrive 100W, for 1-40 fixtures	Concrete pour outer casing (optional)	Masonry outer casing (optional)



Petit_R | Path-marker | powerLED 1.5W 500 mA




0.6


type		color		optic	
White	CRI 80 E92320	3000 K	143 lm	W	5° 05
Chrome	CRI 80 E92321	4000 K	152 lm	N	
Nickel	CRI 80 E92322				

power supply options (remote only)

ECO30W-500	SOLO50W-500	SOLO100W-500	84917
0-10V EidoLED ECOdrive 30W, for 1-10 fixtures	0-10V EidoLED SOLOdrive 50W, for 1-20 fixtures	0-10VEidoLED SOLOdrive 100W, for 1-40 fixtures	Concrete pour outer casing (optional)



Petit_2R | Path-marker | powerLED 2W 630 mA




1.1


type		color		optic	
White	CRI 80 E92409	3000 K	233 lm	W	5° 05
Chrome	CRI 80 E92410	4000 K	249 lm	N	
Nickel	CRI 80 E92411				

power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630	84901
0-10V EidoLED ECOdrive 30W, for 1-10 fixtures	0-10V EidoLED SOLOdrive 50W, for 1-16 fixtures	0-10VEidoLED SOLOdrive 100W, for 1-32 fixtures	Concrete pour outer casing (optional)



Petit_Q | Path-marker | powerLED 1W 350 mA




0.6


type		color		optic	
White	CRI 80 E92324	3000 K	107 lm	W	5° 05
Chrome	CRI 80 E92325	4000 K	114 lm	N	
Nickel	CRI 80 E92326				

power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350	84335
0-10V EidoLED ECOdrive 30W, for 1-10 fixtures	0-10V EidoLED SOLOdrive 50W, for 1-20 fixtures	0-10VEidoLED SOLOdrive 100W, for 1-40 fixtures	Concrete pour outer casing (optional)



Petit_2Q | Path-marker | powerLED 1W 350 mA



1.1


type		color		optic	
White	CRI 80 E92413	3000 K	145 lm	W	5° 05
Chrome	CRI 80 E92414	4000 K	155 lm	N	
Nickel	CRI 80 E92415				

power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350	84915	84336
0-10V EidoLED ECOdrive 30W, for 1-10 fixtures	0-10V EidoLED SOLOdrive 50W, for 1-20 fixtures	0-10VEidoLED SOLOdrive 100W, for 1-40 fixtures	Concrete pour outer casing (optional)	Masonry outer casing (optional)



Petit_Q | Path-marker | powerLED 1.5W 500 mA




0.6



type		color		optic	
White	CRI 80 E92328	3000 K	143 lm	W	5° 05
Chrome	CRI 80 E92329	4000 K	152 lm	N	
Nickel	CRI 80 E92330				

power supply options (remote only)

ECO30W-500	SOLO50W-500	SOLO100W-500	84917
0-10V EidoLED ECOdrive 30W, for 1-10 fixtures	0-10V EidoLED SOLOdrive 50W, for 1-20 fixtures	0-10VEidoLED SOLOdrive 100W, for 1-40 fixtures	Concrete pour outer casing (optional)



Petit_2Q | Path-marker | powerLED 2W 630 mA

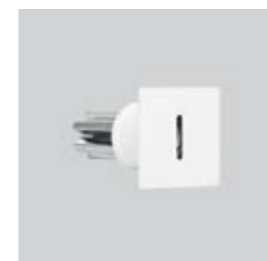


1.1

type		color		optic	
White	CRI 80 E92417	3000 K	233 lm	W	5° 05
Chrome	CRI 80 E92418	4000 K	249 lm	N	
Nickel	CRI 80 E92419				

power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630	84901
0-10V EidoLED ECOdrive 30W, for 1-10 fixtures	0-10V EidoLED SOLOdrive 50W, for 1-16 fixtures	0-10VEidoLED SOLOdrive 100W, for 1-32 fixtures	Concrete pour outer casing (optional)



Quara

inter•lux


An original path-marker, recessed wall light in the shape of a **drop of light carved out of the casing**, square or round and made of Aluminum. Installed **close to the ground, it casts light circles** onto the surface below, while decorating it with style. The ideal solution to reveal the lines of a staircase in the dark, in an evocative yet discreet manner.

Passive heat dissipation


Die cast Aluminum casing

Minimalist aesthetics

The design of the square and circle is direct and universal

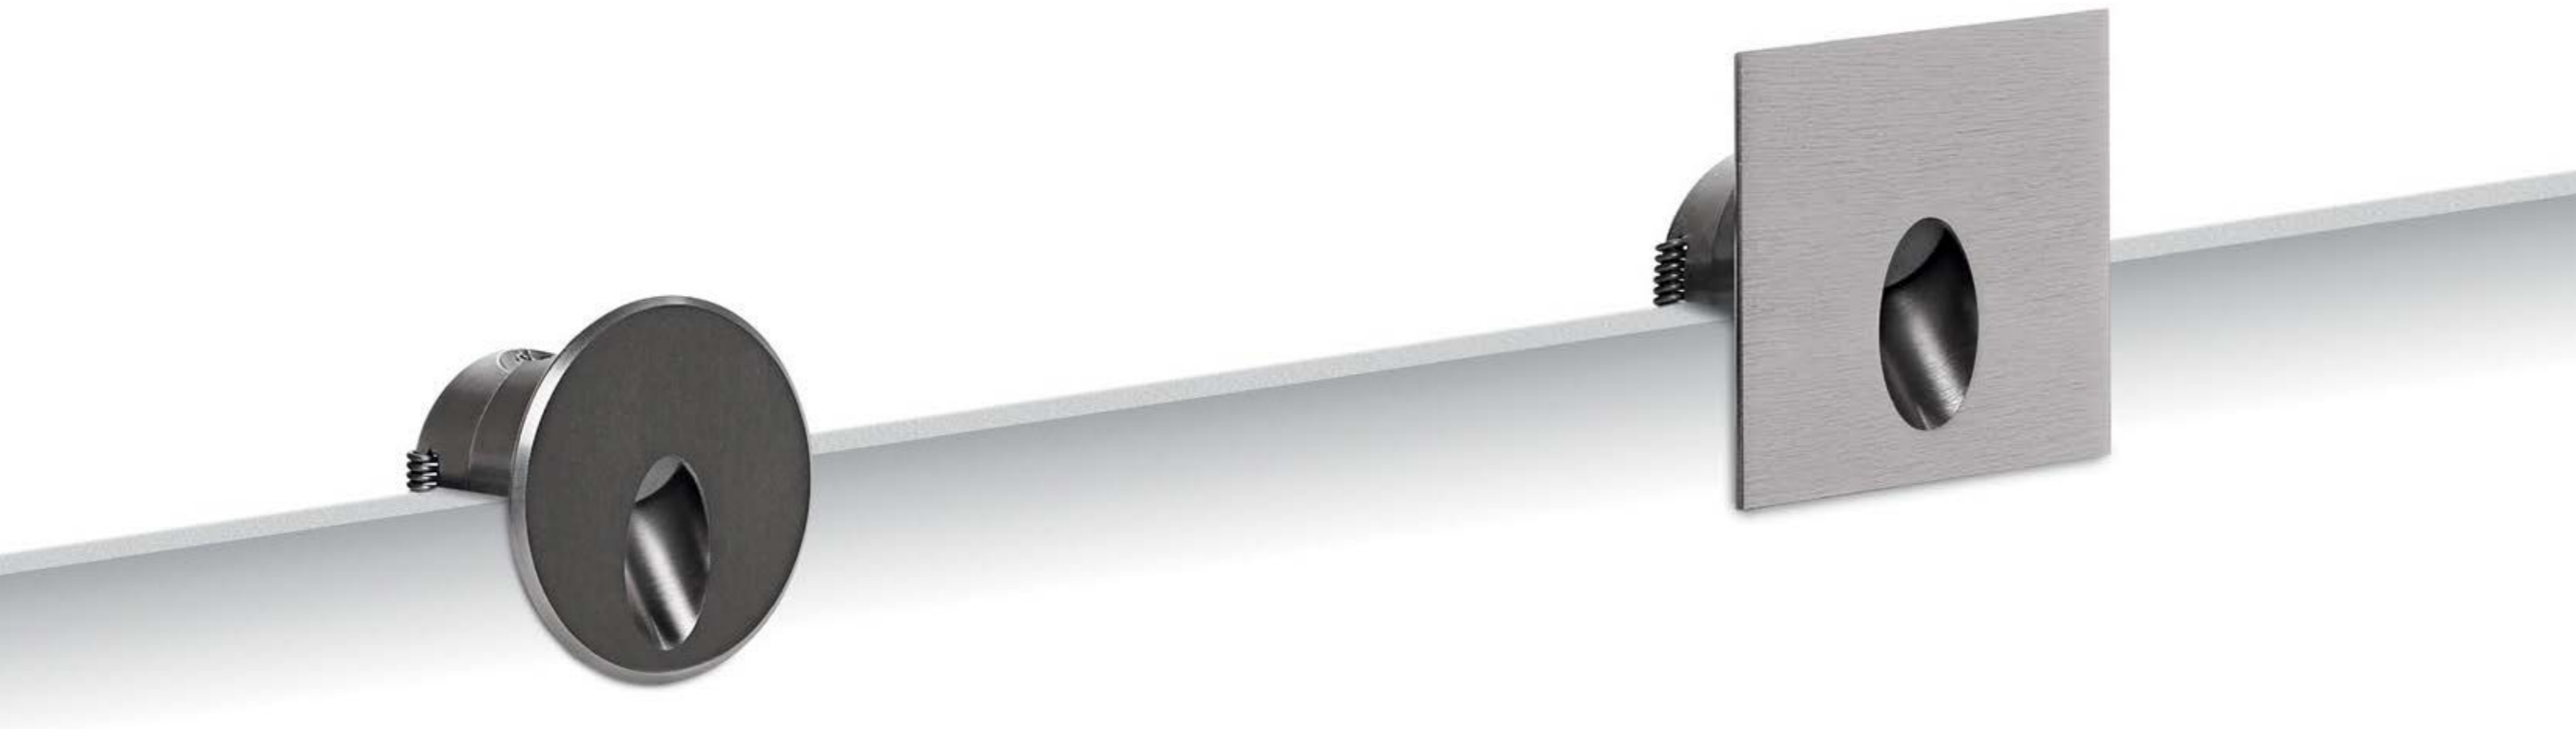

Quara_R | Path-marker | powerLED 2W 630 mA




type		color			optic	
Nickel	CRI 80	E86402	3000 K	233 lm	W	70°
			3500 K	233 lm	T	
			4000 K	249 lm	N	

power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630	84338
0-10V EidoLED ECOdrive 30W, for 1-10 fixtures	0-10V EidoLED SOLOdrive 50W, for 1-16 fixtures	0-10VEidoLED SOLOdrive 100W, for 1-32 fixtures	Concrete pour outer casing (required, order separately)

Quara_Q | Path-marker | powerLED 2W 630 mA



type		color			optic	
Nickel	CRI 80	E86564	3000 K	233 lm	W	70°
			3500 K	233 lm	T	
			4000 K	249 lm	N	

power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630	84338
0-10V EidoLED ECOdrive 30W, for 1-10 fixtures	0-10V EidoLED SOLOdrive 50W, for 1-16 fixtures	0-10VEidoLED SOLOdrive 100W, for 1-32 fixtures	Concrete pour outer casing (required, order separately)

