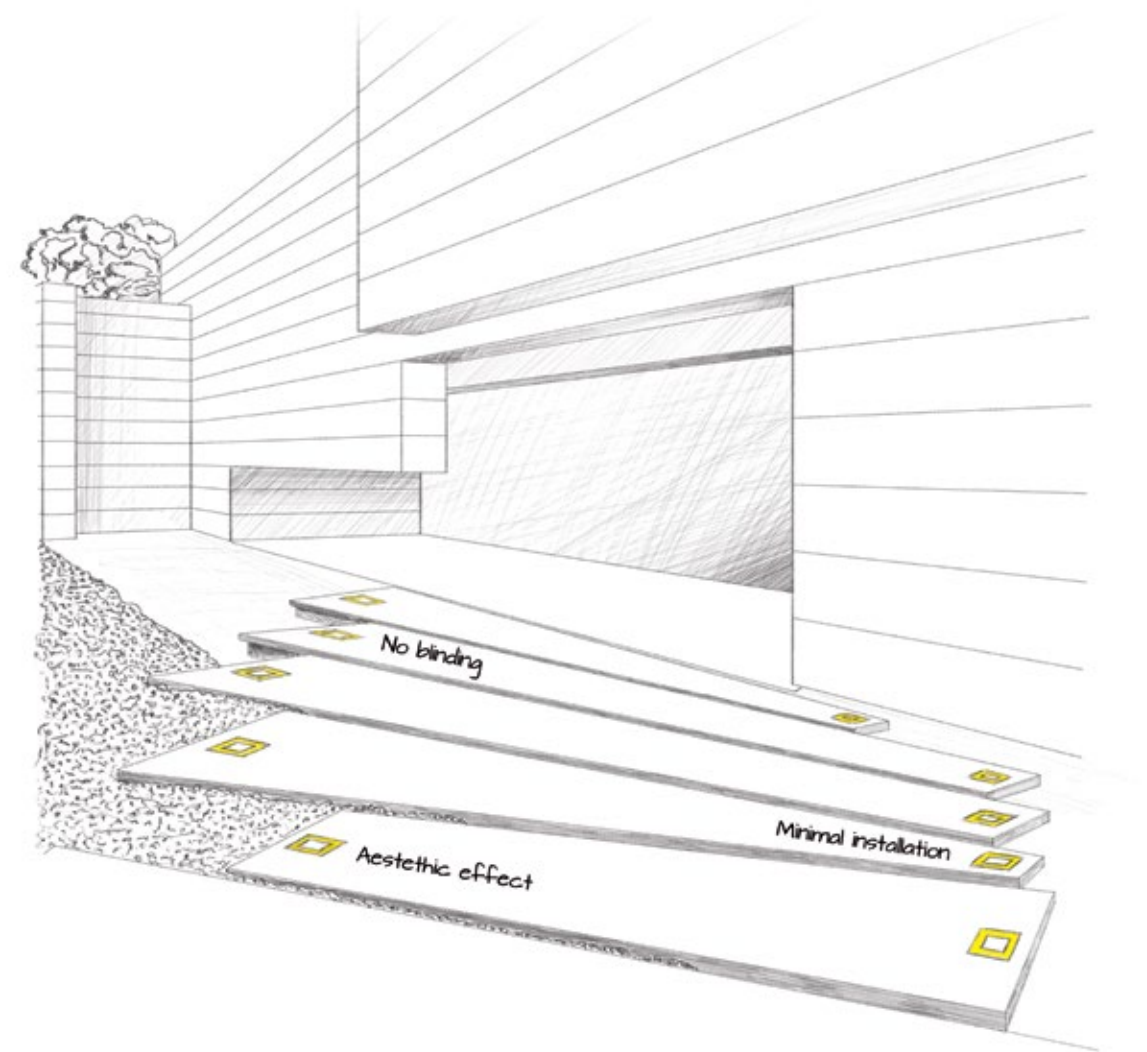


## Concentrica\_Q

4W 24V  
Diffused Light  
No Frame

**Flush installation** for perfect integration into the floor

A fixture that decorates the floor thanks to the particular **design of the diffuser**

**Optics control** results in no undesirable glare

A drive-over path marker light designed **to emit a totally glare-free grazing light**. Extremely reliable thanks **to** the exclusive **Aqua-stop** technology, a patented anti-suction system for neoprene power supply cables against water and humidity


**Passive heat dissipation**  
AISI 316 stainless steel casing for high salinity environments

**Light distribution**  
Two models with different single emission and two models with double and four-way emission





Alcor\_1 | Drive-over spotlights | powerLED 1.5W 500 mA




| type  |        | color  |        | optic  |   |
|-------|--------|--------|--------|--------|---|
| Steel | CRI 80 | E97353 | 3000 K | 199 lm | W |
|       |        |        | 4000 K | 213 lm | N |

power supply options (remote only)

| ECO30W-500                                          | SOLO50W-500                                          | SOLO100W-500                                         | E84918                                          |
|-----------------------------------------------------|------------------------------------------------------|------------------------------------------------------|-------------------------------------------------|
| 0-10V EIdoLED<br>ECOdrive 30W,<br>for 1-10 fixtures | 0-10V EIdoLED<br>SOLOdrive 50W,<br>for 1-20 fixtures | 0-10VEIdoLED<br>SOLOdrive 100W,<br>for 1-40 fixtures | Outer casing<br>(required, order<br>separately) |

Alcor\_1 | Drive-over spotlights | powerLED 1.5W 500 mA




| type  |        | color  |        | optic  |   |
|-------|--------|--------|--------|--------|---|
| Steel | CRI 80 | E97354 | 3000 K | 199 lm | W |
|       |        |        | 4000 K | 213 lm | N |

power supply options (remote only)

| ECO30W-500                                          | SOLO50W-500                                          | SOLO100W-500                                         | E84918                                          |
|-----------------------------------------------------|------------------------------------------------------|------------------------------------------------------|-------------------------------------------------|
| 0-10V EIdoLED<br>ECOdrive 30W,<br>for 1-10 fixtures | 0-10V EIdoLED<br>SOLOdrive 50W,<br>for 1-20 fixtures | 0-10VEIdoLED<br>SOLOdrive 100W,<br>for 1-40 fixtures | Outer casing<br>(required, order<br>separately) |

Alcor\_2 | Drive-over spotlights | powerLED 1.5W 500 mA





| type  |        | color  |        | optic  |   |
|-------|--------|--------|--------|--------|---|
| Steel | CRI 80 | E97355 | 3000 K | 199 lm | W |
|       |        |        | 4000 K | 213 lm | N |

power supply options (remote only)

| ECO30W-500                                          | SOLO50W-500                                          | SOLO100W-500                                         | E84918                                          |
|-----------------------------------------------------|------------------------------------------------------|------------------------------------------------------|-------------------------------------------------|
| 0-10V EIdoLED<br>ECOdrive 30W,<br>for 1-10 fixtures | 0-10V EIdoLED<br>SOLOdrive 50W,<br>for 1-20 fixtures | 0-10VEIdoLED<br>SOLOdrive 100W,<br>for 1-40 fixtures | Outer casing<br>(required, order<br>separately) |

Alcor\_4 | Drive-over spotlights | powerLED 1.5W 500 mA



| type  |        | color  |        | optic  |   |
|-------|--------|--------|--------|--------|---|
| Steel | CRI 80 | E97356 | 3000 K | 199 lm | W |
|       |        |        | 4000 K | 213 lm | N |


power supply options (remote only)

| ECO30W-500                                          | SOLO50W-500                                          | SOLO100W-500                                         | E84918                                          |
|-----------------------------------------------------|------------------------------------------------------|------------------------------------------------------|-------------------------------------------------|
| 0-10V EIdoLED<br>ECOdrive 30W,<br>for 1-10 fixtures | 0-10V EIdoLED<br>SOLOdrive 50W,<br>for 1-20 fixtures | 0-10VEIdoLED<br>SOLOdrive 100W,<br>for 1-40 fixtures | Outer casing<br>(required, order<br>separately) |





Alcor\_1 | Drive-over spotlights | powerLED 6.4W 500 mA




| type  |        | color  |        |        | optic |      |
|-------|--------|--------|--------|--------|-------|------|
| Steel | CRI 80 | E87603 | 3000 K | 566 lm | W     | 180° |
|       |        |        | 3500 K | 596 lm | T     |      |
|       |        |        | 4000 K | 626 lm | N     |      |

power supply options (remote only)

| ECO30W-500                                         | SOLO50W-500                                         | SOLO100W-500                                         | E84341                                          |
|----------------------------------------------------|-----------------------------------------------------|------------------------------------------------------|-------------------------------------------------|
| 0-10V EldoLED<br>ECOdrive 30W,<br>for 1-3 fixtures | 0-10V EldoLED<br>SOLOdrive 50W,<br>for 1-6 fixtures | 0-10VEldoLED<br>SOLOdrive 100W,<br>for 1-12 fixtures | Outer casing<br>(required, order<br>separately) |

Alcor\_2 | Drive-over spotlights | powerLED 6.4W 500 mA




| type  |        | color  |        |        | optic |      |
|-------|--------|--------|--------|--------|-------|------|
| Steel | CRI 80 | E87604 | 3000 K | 566 lm | W     | 180° |
|       |        |        | 3500 K | 596 lm | T     |      |
|       |        |        | 4000 K | 626 lm | N     |      |

power supply options (remote only)

| ECO30W-500                                         | SOLO50W-500                                         | SOLO100W-500                                         | E84341                                          |
|----------------------------------------------------|-----------------------------------------------------|------------------------------------------------------|-------------------------------------------------|
| 0-10V EldoLED<br>ECOdrive 30W,<br>for 1-3 fixtures | 0-10V EldoLED<br>SOLOdrive 50W,<br>for 1-6 fixtures | 0-10VEldoLED<br>SOLOdrive 100W,<br>for 1-12 fixtures | Outer casing<br>(required, order<br>separately) |

Alcor\_4 | Drive-over spotlights | powerLED 6.4W 500 mA



| type  |        | color  |        |        | optic |      |
|-------|--------|--------|--------|--------|-------|------|
| Steel | CRI 80 | E87605 | 3000 K | 566 lm | W     | 180° |
|       |        |        | 3500 K | 596 lm | T     |      |
|       |        |        | 4000 K | 626 lm | N     |      |

power supply options (remote only)

| ECO30W-500                                         | SOLO50W-500                                         | SOLO100W-500                                         | E84341                                          |
|----------------------------------------------------|-----------------------------------------------------|------------------------------------------------------|-------------------------------------------------|
| 0-10V EldoLED<br>ECOdrive 30W,<br>for 1-3 fixtures | 0-10V EldoLED<br>SOLOdrive 50W,<br>for 1-6 fixtures | 0-10VEldoLED<br>SOLOdrive 100W,<br>for 1-12 fixtures | Outer casing<br>(required, order<br>separately) |

Alcor | Outer-casing



| type | Ø in | h. in | suitable for |        |
|------|------|-------|--------------|--------|
| PVC  | 4,3  | 6.1   | Alcor        | E84341 |

# Concentrica

inter•lux

Concentric light circles or squares that create an eye-catching effect at ground level, making it an excellent, original, discreet, yet highly effective **marker** uplight.

**Passive heat dissipation**  
Anodized Aluminum casing

**Light management**  
Single or double diffuser in opaline polycarbonate; also available with central mini uplight

**Durable appearance**  
UV-resistant F.O.L.™ system to obtain a uniform brightness of the round diffusers (2.5W and 4W versions) and to effectively limit color shift over time; additionally, the Aqua-Stop system ensures higher cable protection against water and humidity



Concentrica\_R | Drive-over spotlights | topLED 1.4W 24V



| type  |        |        | color  |       |   | optic |    |
|-------|--------|--------|--------|-------|---|-------|----|
| White | CRI 80 | E95474 | 2700 K | 54 lm | M | Diff. | 00 |
| Black | CRI 80 | E95475 | 3000 K | 60 lm | W |       |    |
| Grey  | CRI 80 | E95476 | 4000 K | 63 lm | N |       |    |

power supply options (remote only)

OT96-D010  
96W 24V 0-10V dim



E98291

Concrete  
outer casing  
(one housing required,  
order separately)



E98292

Tiles  
outer casing  
(one housing required,  
order separately)

Concentrica\_R | Drive-over spotlights | topLED 2.6W 24V



| type  |        |        | color  |        |   | optic |    |
|-------|--------|--------|--------|--------|---|-------|----|
| White | CRI 80 | E95486 | 2700 K | 216 lm | M | Diff. | 00 |
| Black | CRI 80 | E95487 | 3000 K | 240 lm | W |       |    |
| Grey  | CRI 80 | E95488 | 4000 K | 252 lm | N |       |    |

power supply options (remote only)

OT96-D010  
96W 24V 0-10V dim



E98315

Concrete  
outer casing  
(one housing required,  
order separately)



E98317

Tiles  
outer casing  
(one housing required,  
order separately)

Concentrica\_R | Drive-over spotlights | topLED 4W 24V



| type  |        |        | color  |        |   | optic |    |
|-------|--------|--------|--------|--------|---|-------|----|
| White | CRI 80 | E95501 | 2700 K | 324 lm | M | Diff. | 00 |
| Black | CRI 80 | E95502 | 3000 K | 360 lm | W |       |    |
| Grey  | CRI 80 | E95503 | 4000 K | 378 lm | N |       |    |

power supply options (remote only)

OT96-D010  
96W 24V 0-10V dim



E98316


Concrete  
outer casing  
(one housing required,  
order separately)



E98318

Tiles  
outer casing  
(one housing required,  
order separately)

Concentrica\_R | Drive-over spotlights | topLED 1.5W 24V RGB



| type  |        | color |   | optic |    |
|-------|--------|-------|---|-------|----|
| White | E95477 | RGB   | Z | Diff. | 00 |
| Black | E95478 |       |   |       |    |
| Grey  | E95479 |       |   |       |    |

power supply options (remote only)

OT96-D010  
96W 24V 0-10V dim



E98291

Concrete  
outer casing  
(one housing required,  
order separately)



E98292

Tiles  
outer casing  
(one housing required,  
order separately)

Concentrica\_R | Drive-over spotlights | topLED 2.5W 24V RGB



| type  |        | color |   | optic |    |
|-------|--------|-------|---|-------|----|
| White | E95489 | RGB   | Z | Diff. | 00 |
| Black | E95490 |       |   |       |    |
| Grey  | E95491 |       |   |       |    |

power supply options (remote only)

OT96-D010  
96W 24V 0-10V dim



E98315

Concrete  
outer casing  
(one housing required,  
order separately)



E98317

Tiles  
outer casing  
(one housing required,  
order separately)

Concentrica\_R | Drive-over spotlights | topLED 4W 2 V



| type  |        | color |   | optic |    |
|-------|--------|-------|---|-------|----|
| White | E95504 | RGB   | Z | Diff. | 00 |
| Black | E95505 |       |   |       |    |
| Grey  | E95506 |       |   |       |    |

power supply options (remote only)

OT96-D010  
96W 24V 0-10V dim



E98316



Concrete  
outer casing  
(one housing required,  
order separately)



E98318

Tiles  
outer casing  
(one housing required,  
order separately)

Concentrica\_Q | Drive-over spotlights | topLED 1.5W 24V




| type  |        |        | color  |       |   | optic |    |
|-------|--------|--------|--------|-------|---|-------|----|
| White | CRI 80 | E96659 | 2700 K | 54 lm | M | Diff. | 00 |
| Black | CRI 80 | E96660 | 3000 K | 60 lm | W |       |    |
| Grey  | CRI 80 | E96661 | 4000 K | 63 lm | N |       |    |

power supply options (remote only)

OT96-D010  
96W 24V 0-10V dim

E98402  
Tiles outer casing  
(required, order  
separately)

Concentrica\_Q | Drive-over spotlights | topLED 4W 24V




| type  |        |        | color  |        |   | optic |    |
|-------|--------|--------|--------|--------|---|-------|----|
| White | CRI 80 | E94059 | 2700 K | 216 lm | M | Diff. | 00 |
| Black | CRI 80 | E94060 | 3000 K | 240 lm | W |       |    |
| Grey  | CRI 80 | E94061 | 4000 K | 252 lm | N |       |    |

power supply options (remote only)

OT96-D010  
96W 24V 0-10V dim

E98877  
Tiles outer casing  
(required, order  
separately)

Concentrica\_Q | Drive-over spotlights | topLED 4W 24V





| type  |        |        | color  |        |   | optic |    |
|-------|--------|--------|--------|--------|---|-------|----|
| White | CRI 80 | E96665 | 2700 K | 324 lm | M | Diff. | 00 |
| Black | CRI 80 | E96666 | 3000 K | 360 lm | W |       |    |
| Grey  | CRI 80 | E96667 | 4000 K | 378 lm | N |       |    |

power supply options (remote only)

OT96-D010  
96W 24V 0-10V dim

E98404  
Tiles outer casing  
(required, order  
separately)

Concentrica\_Q | Drive-over spotlights | topLED 1.5W 24V RGB




| type  |        | color |   | optic |    |
|-------|--------|-------|---|-------|----|
| White | E96668 | RGB   | Z | Diff. | 00 |
| Black | E96669 |       |   |       |    |
| Grey  | E96670 |       |   |       |    |

power supply options (remote only)

OT96-D010  
96W 24V 0-10V dim

E98402  
Tiles outer casing  
(required, order  
separately)

Concentrica\_Q | Drive-over spotlights | topLED 2.5W 24V RGB




| type  |        | color |   | optic |    |
|-------|--------|-------|---|-------|----|
| White | E94062 | RGB   | Z | Diff. | 00 |
| Black | E94063 |       |   |       |    |
| Grey  | E94064 |       |   |       |    |

power supply options (remote only)

OT96-D010  
96W 24V 0-10V dim

E98877  
Tiles outer casing  
(required, order  
separately)

Concentrica\_Q | Drive-over spotlights | topLED 4W 24V RGB



| type  |        | color |   | optic |    |
|-------|--------|-------|---|-------|----|
| White | E96674 | RGB   | Z | Diff. | 00 |
| Black | E96675 |       |   |       |    |
| Grey  | E96676 |       |   |       |    |


power supply options (remote only)

OT96-D010  
96W 24V 0-10V dim

E98404  
Tiles outer casing  
(required, order  
separately)



Concentrica\_X | Drive-over spotlights | powerLED 1 W + topLED 2. 6 W



| type  |        |        | color  |        |   | optic |    |
|-------|--------|--------|--------|--------|---|-------|----|
| White | CRI 80 | E95492 | 2700 K | 352 lm | M | 8°    | 08 |
| Black | CRI 80 | E95493 | 3000 K | 385 lm | W | 15°   | 15 |
| Grey  | CRI 80 | E95494 | 4000 K | 407 lm | N | 30°   | 30 |
|       |        |        |        |        |   | 60°   | 60 |

power supply options (remote only)

OT96-ECO30W-350-KIT



E98315


Concrete  
outer casing  
(one housing required,  
order separately)



E98317

Tiles  
outer casing  
(one housing required,  
order separately)

Concentrica\_X | Drive-over spotlights | powerLED 1 W + topLED 4 W



| type  |        |        | color  |        |   | optic |    |
|-------|--------|--------|--------|--------|---|-------|----|
| White | CRI 80 | E95507 | 2700 K | 460 lm | M | 8°    | 08 |
| Black | CRI 80 | E95508 | 3000 K | 505 lm | W | 15°   | 15 |
| Grey  | CRI 80 | E95509 | 4000 K | 533 lm | N | 30°   | 30 |
|       |        |        |        |        |   | 60°   | 60 |

power supply options (remote only)

OT96-ECO30W-350-KIT



E98316

Concrete  
outer casing  
(one housing required,  
order separately)



E98318

Tiles  
outer casing  
(one housing required,  
order separately)

“Villa San Gottardo” - Vittorio Veneto (Italy)







A path-marker recessed spotlight with tilted emission and an ultra-thin round or square shape for a **minimalistic delicate appearance**.

**Passive heat dissipation**  
Aluminum casing

**Light distribution**  
Very narrow tilted emission for a functional yet minimalistic effect

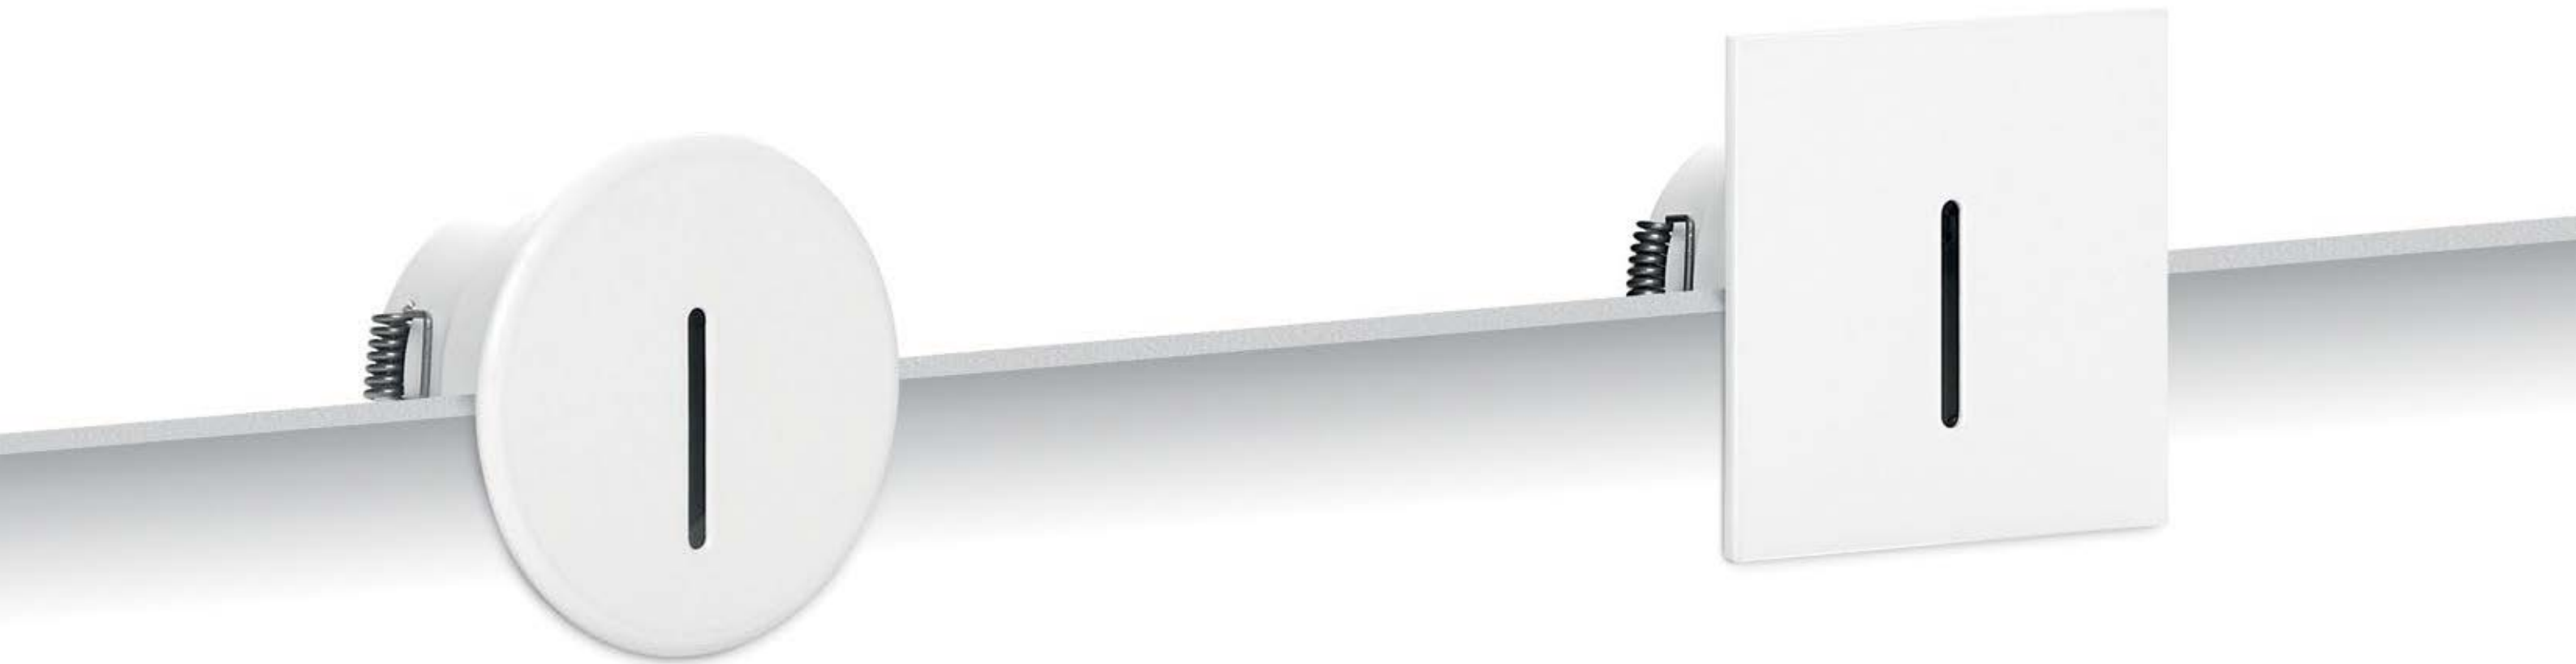

Cut\_R | Path-marker | powerLED 2W 630 mA




| type  |        |        | color  |        |   | optic |    |  |
|-------|--------|--------|--------|--------|---|-------|----|--|
| White | CRI 80 | E92513 | 3000 K | 233 lm | W | 5°    | 05 |  |
| Grey  | CRI 80 | E92514 | 4000 K | 249 lm | N |       |    |  |

power supply options (remote only)

| ECO30W-630                                          | SOLO50W-630                                          | SOLO100W-630                                         | E84338                                                   |
|-----------------------------------------------------|------------------------------------------------------|------------------------------------------------------|----------------------------------------------------------|
| 0-10V EidoLED<br>ECOdrive 30W,<br>for 1-10 fixtures | 0-10V EidoLED<br>SOLOdrive 50W,<br>for 1-16 fixtures | 0-10VEidoLED<br>SOLOdrive 100W,<br>for 1-32 fixtures | Concrete outer casing<br>(required, order<br>separately) |

Cut\_Q | Path-marker | powerLED 2W 630 mA



| type  |        |        | color  |        |   | optic |    |  |
|-------|--------|--------|--------|--------|---|-------|----|--|
| White | CRI 80 | E92558 | 3000 K | 233 lm | W | 5°    | 05 |  |
| Grey  | CRI 80 | E92559 | 4000 K | 249 lm | N |       |    |  |

power supply options (remote only)

| ECO30W-630                                          | SOLO50W-630                                          | SOLO100W-630                                         | E84338                                                   |
|-----------------------------------------------------|------------------------------------------------------|------------------------------------------------------|----------------------------------------------------------|
| 0-10V EidoLED<br>ECOdrive 30W,<br>for 1-10 fixtures | 0-10V EidoLED<br>SOLOdrive 50W,<br>for 1-16 fixtures | 0-10VEidoLED<br>SOLOdrive 100W,<br>for 1-32 fixtures | Concrete outer casing<br>(required, order<br>separately) |





# Gypsum\_WF


## inter•lux

### Invisible step light

Wall lighting cuts, available in three dimensions, to illuminate hallways. Chalk flush frame with recessed fixed optics to create fascinating light effects.

- + light cuts
- + two size options
- + LED source

Gypsum\_WF1 | Recessed lights | 1 x powerLED 1W 350 mA




|                                                                                                                                                                                                                                                                                                                                                                            |              |               |                           |                  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------|---------------------------|------------------|
| <div><div> C.C.   </div></div> |              |               |                           |                  |
| <b>type</b>                                                                                                                                                                                                                                                                                                                                                                | <b>color</b> |               |                           | <b>optics</b>    |
| <div>White</div>                                                                                                                                                                                                                                                                                                                                                           | CRI 80       | <b>E60920</b> | 3000 K    130 lm <b>W</b> | <b>70°    70</b> |
|                                                                                                                                                                                                                                                                                                                                                                            |              |               | 4000 K    140 lm <b>N</b> |                  |

power supply options (remote only)

| ECO30W-350                                          | SOL050W-350                                          | SOL0100W-350                                         |
|-----------------------------------------------------|------------------------------------------------------|------------------------------------------------------|
| 0-10V EIdoLED<br>ECOdrive 30W,<br>for 1-10 fixtures | 0-10V EIdoLED<br>SOLOdrive 50W,<br>for 1-20 fixtures | 0-10VEIdoLED<br>SOLOdrive 100W,<br>for 1-40 fixtures |

Gypsum\_WF2 | Recessed lights | 1 x powerLED 1W 350 mA



|                                                                                                                                                                                                                                                                                                                                                                            |              |               |                        |               |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------|------------------------|---------------|
| <div><div> C.C.   </div></div> |              |               |                        |               |
| <b>type</b>                                                                                                                                                                                                                                                                                                                                                                | <b>color</b> |               |                        | <b>optics</b> |
| <div>White</div>                                                                                                                                                                                                                                                                                                                                                           | CRI 80       | <b>E60930</b> | 3000 K 130 lm <b>W</b> | <b>70° 70</b> |
|                                                                                                                                                                                                                                                                                                                                                                            |              |               | 4000 K 140 lm <b>N</b> |               |

power supply options (remote only)

| ECO30W-350                                          | SOL050W-350                                          | SOL0100W-350                                         |
|-----------------------------------------------------|------------------------------------------------------|------------------------------------------------------|
| 0-10V EIdoLED<br>ECOdrive 30W,<br>for 1-10 fixtures | 0-10V EIdoLED<br>SOLOdrive 50W,<br>for 1-20 fixtures | 0-10VEIdoLED<br>SOLOdrive 100W,<br>for 1-40 fixtures |






# Gypsum\_WR

inter•lux


## Total invisibility

The invisible takes shape, becoming a light source. The invisible frame follows the contemporary architecture needs. This model represents light essence, gathered around a single point.

**+ total invisibility**  
**+ luxury finishes**  
**+ LED source**

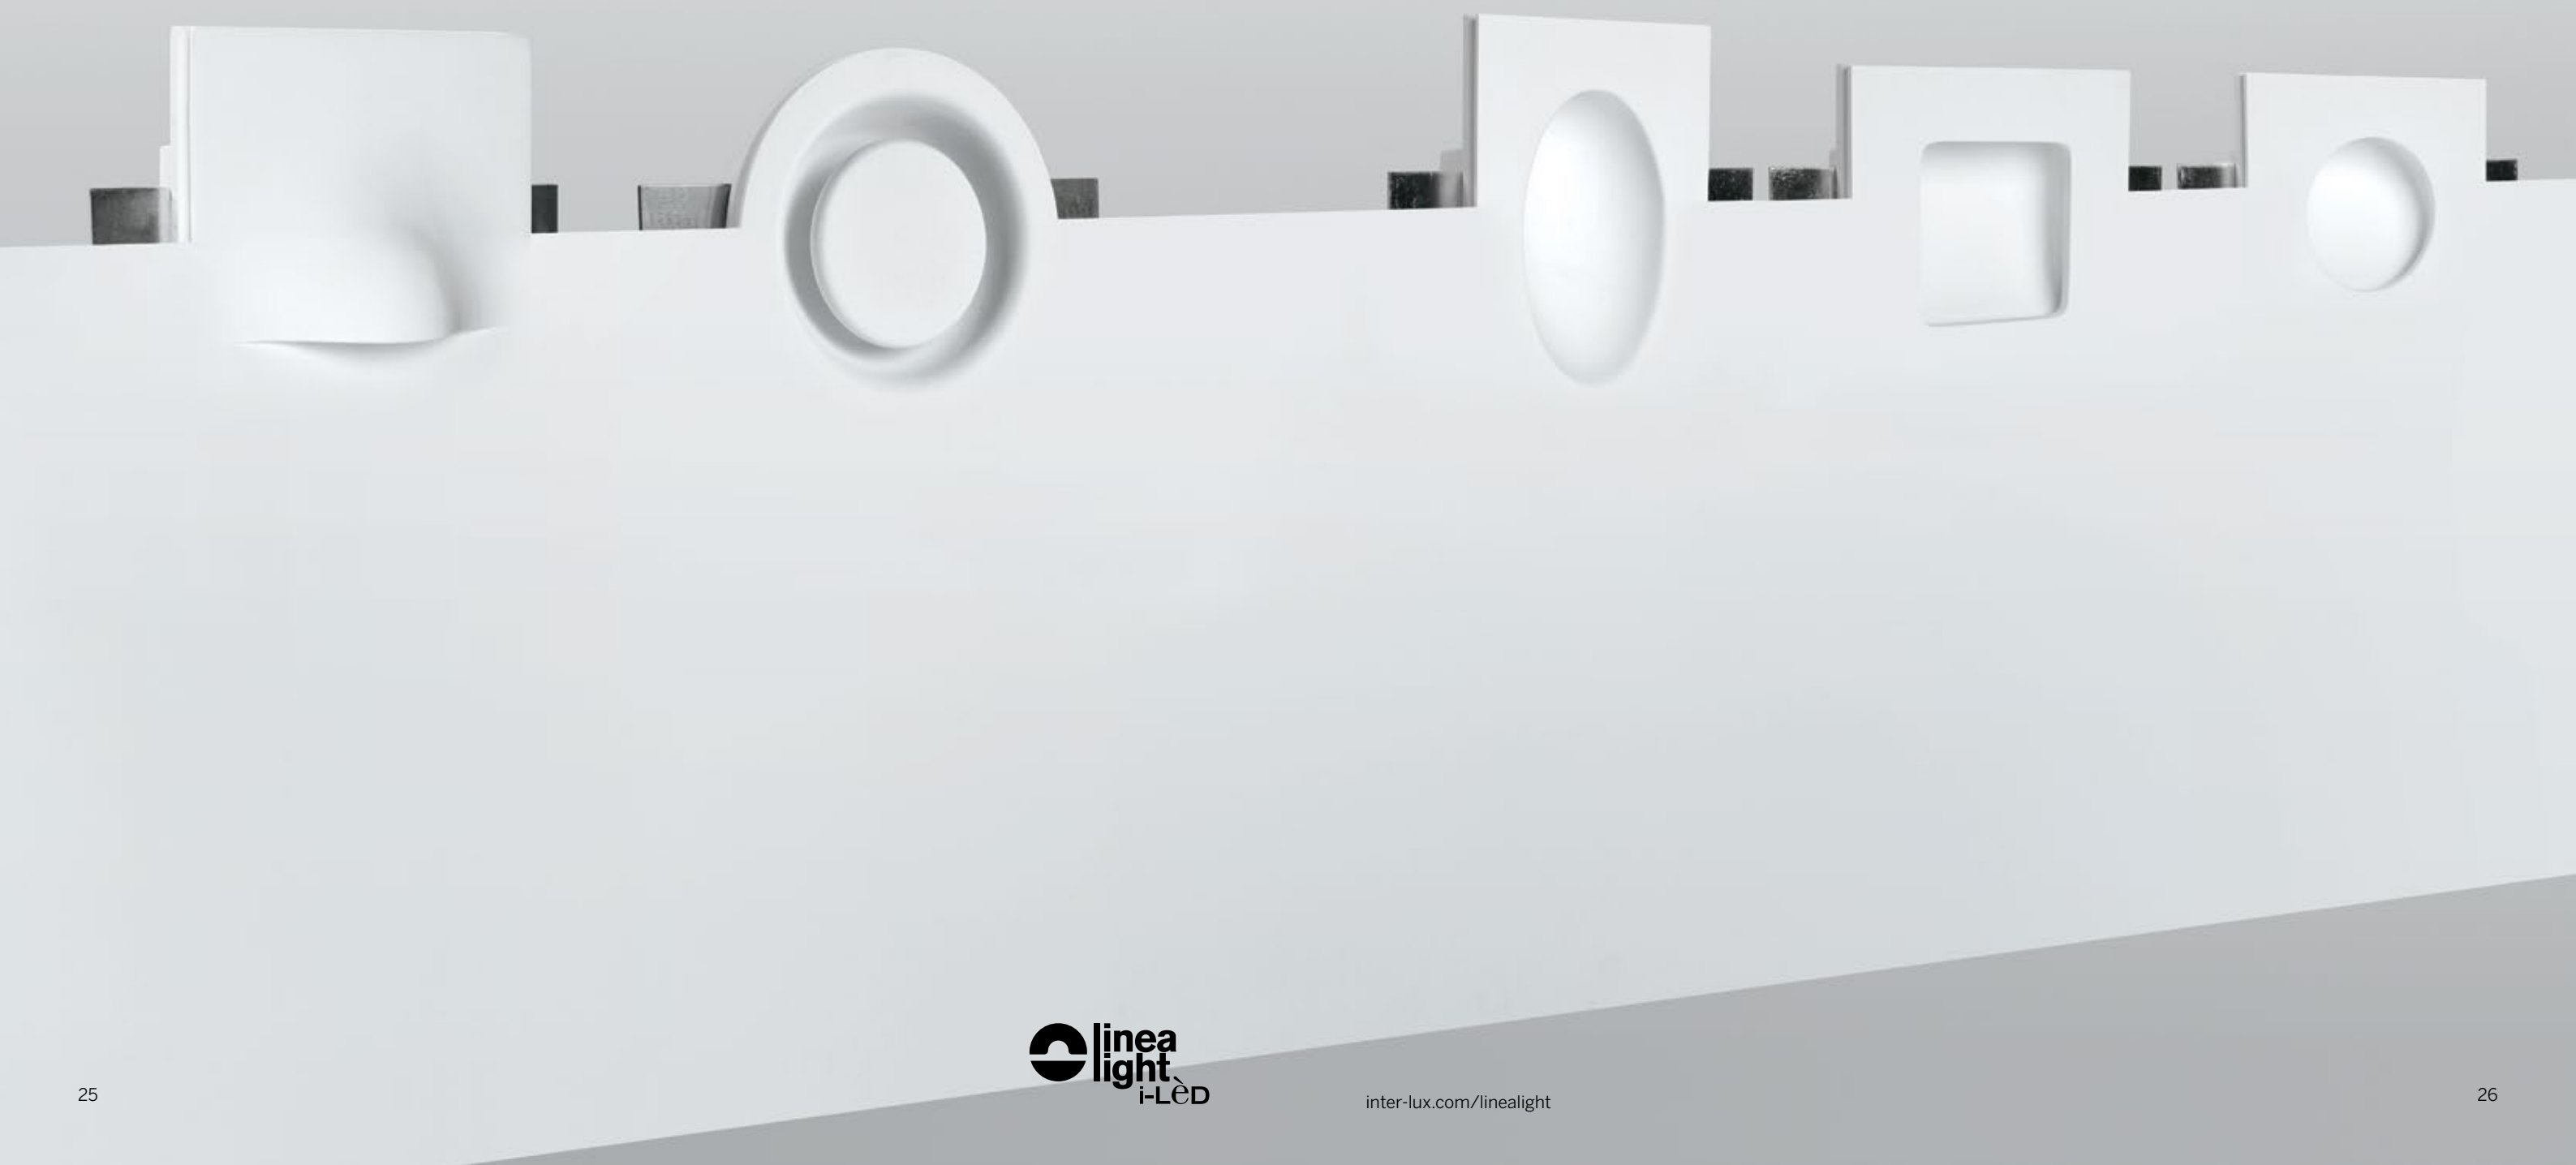

Gypsum\_WR1 | Recessed lights | 1 x powerLED 1W 350 mA




| type  |        | color  |        |        | optics |             |
|-------|--------|--------|--------|--------|--------|-------------|
| White | CRI 80 | E60813 | 3000 K | 130 lm | W      | diffused 00 |
|       |        |        | 4000 K | 140 lm | N      |             |

power supply options (remote only)

| ECO30W-350                                          | SOLO50W-350                                          | SOLO100W-350                                         |
|-----------------------------------------------------|------------------------------------------------------|------------------------------------------------------|
| 0-10V EidoLED<br>ECOdrive 30W,<br>for 1-10 fixtures | 0-10V EidoLED<br>SOLOdrive 50W,<br>for 1-20 fixtures | 0-10VEidoLED<br>SOLOdrive 100W,<br>for 1-40 fixtures |

Gypsum\_WR2 | Recessed lights | 1 x powerLED 1W 350 mA




| type  |        | color  |        |        | optics |             |
|-------|--------|--------|--------|--------|--------|-------------|
| White | CRI 80 | E60815 | 3000 K | 130 lm | W      | diffused 00 |
|       |        |        | 4000 K | 140 lm | N      |             |

power supply options (remote only)

| ECO30W-350                                          | SOLO50W-350                                          | SOLO100W-350                                         |
|-----------------------------------------------------|------------------------------------------------------|------------------------------------------------------|
| 0-10V EidoLED<br>ECOdrive 30W,<br>for 1-10 fixtures | 0-10V EidoLED<br>SOLOdrive 50W,<br>for 1-20 fixtures | 0-10VEidoLED<br>SOLOdrive 100W,<br>for 1-40 fixtures |

Gypsum\_WRQ | Recessed lights | 1 x powerLED 1W 350 mA




| type  |        | color  |        |        | optics |             |
|-------|--------|--------|--------|--------|--------|-------------|
| White | CRI 80 | E60814 | 3000 K | 130 lm | W      | diffused 00 |
|       |        |        | 4000 K | 140 lm | N      |             |

power supply options (remote only)

| ECO30W-350                                          | SOLO50W-350                                          | SOLO100W-350                                         |
|-----------------------------------------------------|------------------------------------------------------|------------------------------------------------------|
| 0-10V EidoLED<br>ECOdrive 30W,<br>for 1-10 fixtures | 0-10V EidoLED<br>SOLOdrive 50W,<br>for 1-20 fixtures | 0-10VEidoLED<br>SOLOdrive 100W,<br>for 1-40 fixtures |

Gypsum\_WRX | Recessed lights | 1 x powerLED 1W 350 mA




| type  |        | color  |        |        | optics |             |
|-------|--------|--------|--------|--------|--------|-------------|
| White | CRI 80 | E60910 | 3000 K | 130 lm | W      | diffused 00 |
|       |        |        | 4000 K | 140 lm | N      |             |

power supply options (remote only)

| ECO30W-350                                          | SOLO50W-350                                          | SOLO100W-350                                         |
|-----------------------------------------------------|------------------------------------------------------|------------------------------------------------------|
| 0-10V EidoLED<br>ECOdrive 30W,<br>for 1-10 fixtures | 0-10V EidoLED<br>SOLOdrive 50W,<br>for 1-20 fixtures | 0-10VEidoLED<br>SOLOdrive 100W,<br>for 1-40 fixtures |


Gypsum\_WR3 | Recessed lights | 1 x powerLED 1W 350 mA



| type  |        | color  |        |        | optics |             |
|-------|--------|--------|--------|--------|--------|-------------|
| White | CRI 80 | E60811 | 3000 K | 130 lm | W      | diffused 00 |
|       |        |        | 4000 K | 140 lm | N      |             |

power supply options (remote only)

| ECO30W-350                                          | SOLO50W-350                                          | SOLO100W-350                                         |
|-----------------------------------------------------|------------------------------------------------------|------------------------------------------------------|
| 0-10V EidoLED<br>ECOdrive 30W,<br>for 1-10 fixtures | 0-10V EidoLED<br>SOLOdrive 50W,<br>for 1-20 fixtures | 0-10VEidoLED<br>SOLOdrive 100W,<br>for 1-40 fixtures |

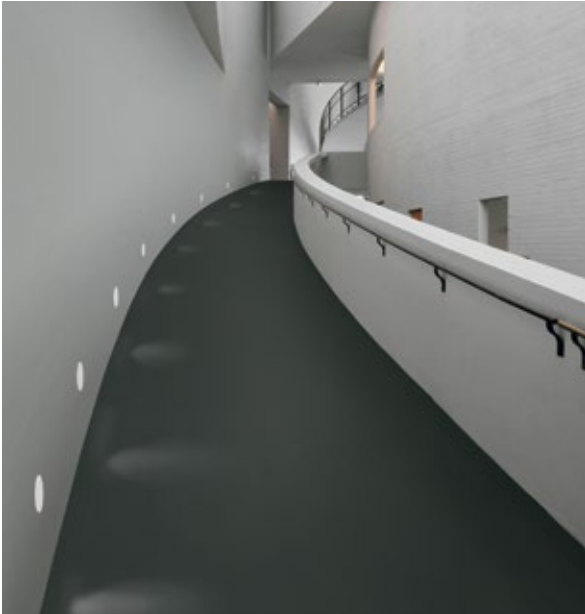





# Quara65

inter•lux


An oval path-marker recessed wall light in the shape of a **drop of light** carved out of the square or round casing, made of aluminium or steel. Installed close to the ground, it casts **light circles** onto the surface below while decorating outdoor stairs and flooring details in the dark with style.

## Passive heat dissipation

Aluminum casing or AISI 316 stainless steel casing for high salinity environments

## Customizable light

Two color temperatures and four finishes available for customizable lighting

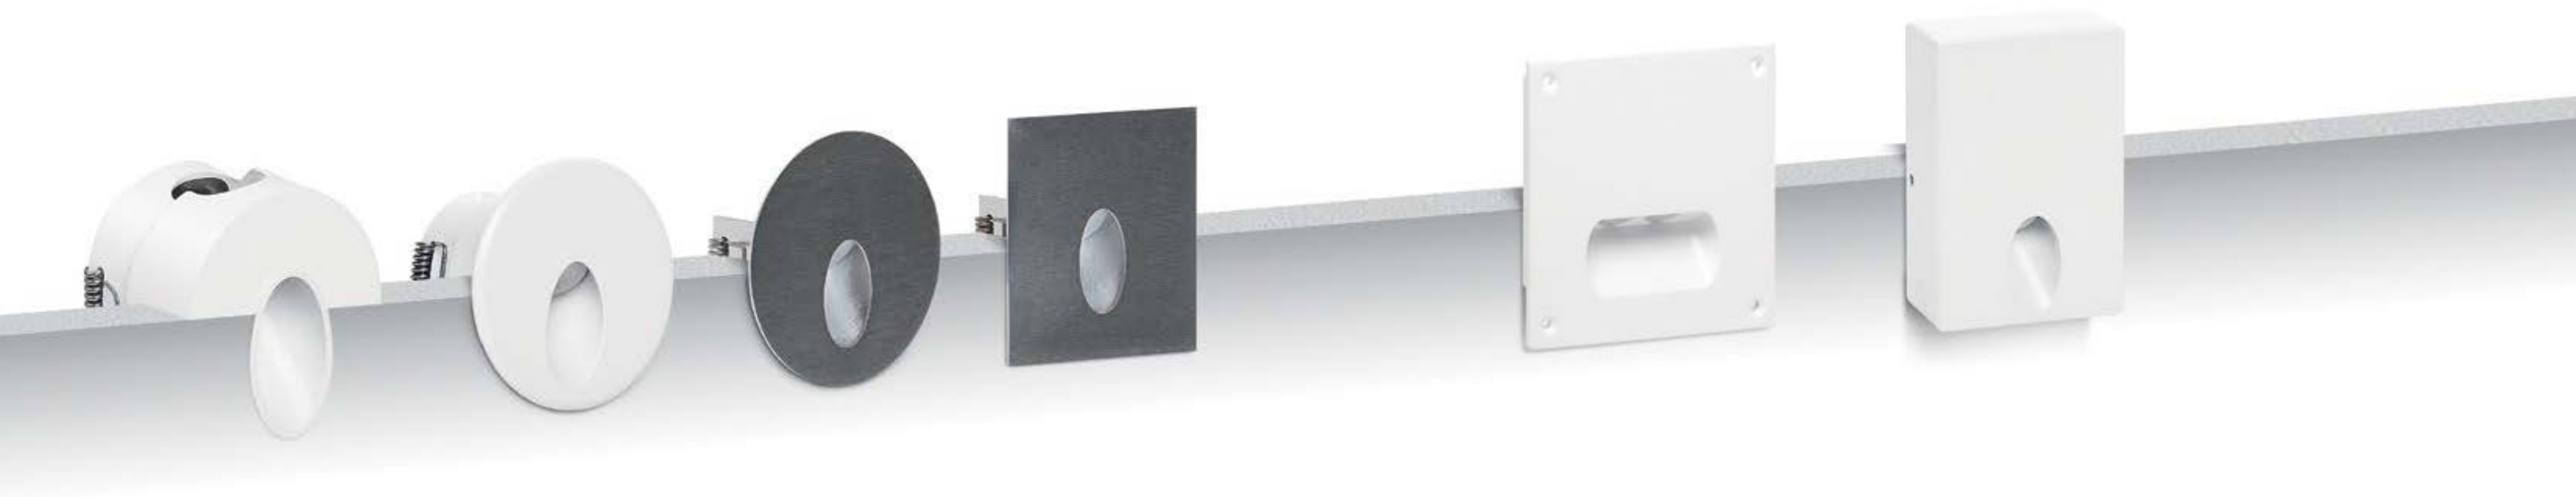

Quara65\_R | Path-marker | powerLED 2W 630 mA | bezel trim



| type    |        |        | color  |        |   | optic |    |  |
|---------|--------|--------|--------|--------|---|-------|----|--|
| White   | CRI 80 | E85543 | 3000 K | 233 lm | W | 70°   | 70 |  |
| Grey    | CRI 80 | E85542 | 4000 K | 249 lm | N |       |    |  |
| Cor-Ten | CRI 80 | E87988 |        |        |   |       |    |  |

power supply options (remote only)

| ECO30W-630                                          | SOLO50W-630                                          | SOLO100W-630                                         | E84338                                          |
|-----------------------------------------------------|------------------------------------------------------|------------------------------------------------------|-------------------------------------------------|
| 0-10V EldoLED<br>ECOdrive 30W,<br>for 1-10 fixtures | 0-10V EldoLED<br>SOLOdrive 50W,<br>for 1-16 fixtures | 0-10VEldoLED<br>SOLOdrive 100W,<br>for 1-32 fixtures | Outer casing<br>(required, order<br>separately) |

Quara65\_RI | Path-marker | powerLED 2W 630 mA | bezel trim



| type  |        |        | color  |        |   | optic |    |  |
|-------|--------|--------|--------|--------|---|-------|----|--|
| Steel | CRI 80 | E92671 | 3000 K | 233 lm | W | 70°   | 70 |  |
|       |        |        | 4000 K | 249 lm | N |       |    |  |

power supply options (remote only)

| ECO30W-630                                          | SOLO50W-630                                          | SOLO100W-630                                         | E84338                                          |
|-----------------------------------------------------|------------------------------------------------------|------------------------------------------------------|-------------------------------------------------|
| 0-10V EldoLED<br>ECOdrive 30W,<br>for 1-10 fixtures | 0-10V EldoLED<br>SOLOdrive 50W,<br>for 1-16 fixtures | 0-10VEldoLED<br>SOLOdrive 100W,<br>for 1-32 fixtures | Outer casing<br>(required, order<br>separately) |

Quara65\_F | Path-marker | powerLED 1W 350 mA | plaster in



| type  |        |        | color  |        |   | optic |    |  |
|-------|--------|--------|--------|--------|---|-------|----|--|
| White | CRI 80 | E86460 | 3000 K | 145 lm | W | 70°   | 70 |  |
|       |        |        | 4000 K | 155 lm | N |       |    |  |

power supply options (remote only)

| ECO30W-350                                          | SOLO50W-350                                          | SOLO100W-350                                         | E84338                                          |
|-----------------------------------------------------|------------------------------------------------------|------------------------------------------------------|-------------------------------------------------|
| 0-10V EldoLED<br>ECOdrive 30W,<br>for 1-10 fixtures | 0-10V EldoLED<br>SOLOdrive 50W,<br>for 1-20 fixtures | 0-10VEldoLED<br>SOLOdrive 100W,<br>for 1-40 fixtures | Outer casing<br>(required, order<br>separately) |

Quara65\_Q | Path-marker | powerLED 2W 630 mA | bezel trim



| type    |        |        | color  |        |   | optic |    |  |
|---------|--------|--------|--------|--------|---|-------|----|--|
| White   | CRI 80 | E86563 | 3000 K | 233 lm | W | 70°   | 70 |  |
| Grey    | CRI 80 | E86562 | 4000 K | 249 lm | N |       |    |  |
| Cor-Ten | CRI 80 | E87989 |        |        |   |       |    |  |

power supply options (remote only)

| ECO30W-630                                          | SOLO50W-630                                          | SOLO100W-630                                         | E84338                                          |
|-----------------------------------------------------|------------------------------------------------------|------------------------------------------------------|-------------------------------------------------|
| 0-10V EldoLED<br>ECOdrive 30W,<br>for 1-10 fixtures | 0-10V EldoLED<br>SOLOdrive 50W,<br>for 1-16 fixtures | 0-10VEldoLED<br>SOLOdrive 100W,<br>for 1-32 fixtures | Outer casing<br>(required, order<br>separately) |

Quara65\_QI | Path-marker | powerLED 2W 630 mA | bezel trim



| type  |        |        | color  |        |   | optic |    |  |
|-------|--------|--------|--------|--------|---|-------|----|--|
| Steel | CRI 80 | E92672 | 3000 K | 233 lm | W | 70°   | 70 |  |
|       |        |        | 4000 K | 249 lm | N |       |    |  |

power supply options (remote only)

| ECO30W-630                                          | SOLO50W-630                                          | SOLO100W-630                                         | E84338                                          |
|-----------------------------------------------------|------------------------------------------------------|------------------------------------------------------|-------------------------------------------------|
| 0-10V EldoLED<br>ECOdrive 30W,<br>for 1-10 fixtures | 0-10V EldoLED<br>SOLOdrive 50W,<br>for 1-16 fixtures | 0-10VEldoLED<br>SOLOdrive 100W,<br>for 1-32 fixtures | Outer casing<br>(required, order<br>separately) |

Quara65\_QI | Path-marker | powerLED 4W 630 mA | bezel trim



| type    |        |        | color  |        |   | optic |    |  |
|---------|--------|--------|--------|--------|---|-------|----|--|
| White   | CRI 80 | E92238 | 3000 K | 466 lm | W | 70°   | 70 |  |
| Grey    | CRI 80 | E92239 | 4000 K | 498 lm | N |       |    |  |
| Cor-Ten | CRI 80 | E92240 |        |        |   |       |    |  |

power supply options (remote only)

| ECO30W-630                                         | SOLO50W-630                                          | SOLO100W-630                                         | E98050                                          |
|----------------------------------------------------|------------------------------------------------------|------------------------------------------------------|-------------------------------------------------|
| 0-10V EldoLED<br>ECOdrive 30W,<br>for 1-6 fixtures | 0-10V EldoLED<br>SOLOdrive 50W,<br>for 1-10 fixtures | 0-10VEldoLED<br>SOLOdrive 100W,<br>for 1-20 fixtures | Outer casing<br>(required, order<br>separately) |

Quara65\_X | Path-marker | powerLED 2W 630 mA | surface mounted



| type    |        |        | color  |        |   | optic |    |  |
|---------|--------|--------|--------|--------|---|-------|----|--|
| White   | CRI 80 | E92214 | 3000 K | 233 lm | W | 70°   | 70 |  |
| Grey    | CRI 80 | E92215 | 4000 K | 249 lm | N |       |    |  |
| Cor-Ten | CRI 80 | E92216 |        |        |   |       |    |  |

power supply options (remote only)

| ECO30W-630                                          | SOLO50W-630                                          | SOLO100W-630                                         | Mounts to a<br>single-gang box |
|-----------------------------------------------------|------------------------------------------------------|------------------------------------------------------|--------------------------------|
| 0-10V EldoLED<br>ECOdrive 30W,<br>for 1-10 fixtures | 0-10V EldoLED<br>SOLOdrive 50W,<br>for 1-16 fixtures | 0-10VEldoLED<br>SOLOdrive 100W,<br>for 1-32 fixtures |                                |