


FINO PENDANT

Housing: Pendant light, solid Aluminum housing  
 Design: Ulrich Sattler | Michael Schmidt, Code2design

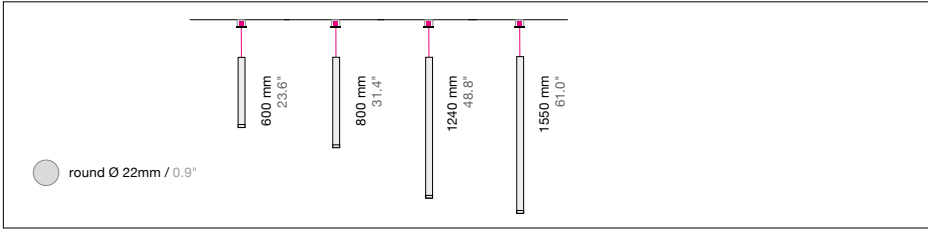

Sizes	Size: Ø / L mm	Inches	LED Watt	Lumen <sup>1)</sup>	Weight <sup>2)</sup> kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
	Ø 22 / L 600 mm	Ø 0.9 / L 23.6"	4	365	0.4 / 0.8	<b>1533.</b>	x x.	x x.	x x.	x x.	x x x.	x x
	Ø 22 / L 800 mm	Ø 0.9 / L 31.4"	4	365	0.5 / 1.1	<b>1534.</b>	x x.	x x.	x x.	x x.	x x x.	x x
	Ø 22 / L 1240 mm	Ø 0.9 / L 48.8"	4	365	0.7 / 1.5	<b>1535.</b>	x x.	x x.	x x.	x x.	x x x.	x x
	Ø 22 / L 1550 mm	Ø 0.9 / L 61.0"	4	365	0.8 / 1.7	<b>1536.</b>	x x.	x x.	x x.	x x.	x x x.	x x

<b>LED</b> Constant Current 350mA CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		<b>Standard:</b> Warm-white 3000 K	x x x.	<b>30.</b>	x x.	x x.	x x.	x x x.	x x
		<b>Optional:</b> Neutral-white 4000 K Extra warm-white 2700 K	x x x.	<b>40. 27.</b>	x x.	x x.	x x.	x x x.	x x

<b>Dimming</b>		<b>Standard:</b> 0 - 10 V	x x x.	x x.	<b>11. 00.</b>	x x.	x x x.	x x
----------------	--	---------------------------	--------	------	----------------	------	--------	-----

<b>Finish</b>		<b>Standard:</b> 66 bronze anodized brushed <b>Optional:</b> 60 silver anodized brushed, 62 black anodized brushed, 65 champ. gold anodized brushed <b>Optional (Premium):</b> 22 Aluminum polished	x x x.	x x.	x x.	x x.	---	x x x.	x x
---------------	--	---	--------	------	------	------	-----	--------	-----

<b>Power supply cable</b>		<b>Z 80</b> black matte	x x x.	x x.	x x.	x x.	x x.	<b>Z80.</b>	x x
---------------------------	--	-------------------------	--------	------	------	------	------	-------------	-----

<b>Mounting version</b>		<b>Standard:</b> Suspension with canopy DB 72/32 with remote driver and 1 power supply cable 2000mm / 78.7. <b>Optional:</b> Cover Ø 80 mm / 3.1" Ceiling cutout 68 mm / 2.7" Power supply unit in cavity box. Cover Ø 50mm / 2.0"³ Ceiling cutout 35 mm / 1.4" Power supply unit in suspended ceiling.	x x x.	x x.	x x.	x x.	x x.	x x x.	---
-------------------------	--	---	--------	------	------	------	------	--------	-----

3) an inspection flap is required for the power supply unit

Canopy:		Included with Mounting version	Protective rating
	<b>DA 50</b> Cover Ø 35mm / 1.4" Ceiling cutout 35 mm / 2.0" Power supply unit in suspended ceiling White Similar to RAL 9003 (22 polished)	<b>U3</b>	<b>IP 40</b>
	<b>DB 78/32</b> Cover Ø 78 mm / 3.0" H 32 mm / 1.2" Power supply unit in in suspended ceiling White Similar to RAL 9003 (22 polished)	<b>F</b>	<b>IP 40</b>
	<b>DA 125</b> Cover Ø 125mm / 4.9" Ceiling cutout Ø 101.6mm / 4" Power supply unit in suspended ceiling same Color as luminaire	<b>U</b>	<b>IP 40</b>

---	---	---	<b>00.</b>	---	<b>Z80.</b>	---
-----	-----	-----	------------	-----	-------------	-----

Complete order number

**Remote driver required ordered separately:**  
 Type / Size mm / inch L x W x H  
**0-10V: ECO30W-350 13.25" x 5" x 2.25"**

Input voltage for all external power supply units and canopy is 120-277 VAC 50-60 Hz