


PALITO

Housing: Pendant light, solid Aluminum housing
 Design: Ulrich Sattler | Michael Schmidt, Code2design

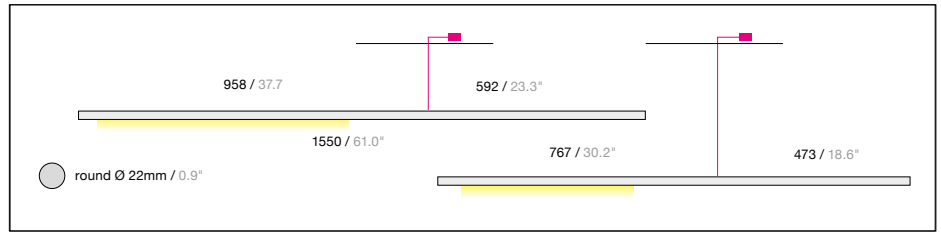



SIZE	Size: Ø / L mm	Inches	LED Watt	Lumen ¹	Weight ² kg / lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version	
	Ø 22 / L 1240 mm	Ø 0.9 / L 48.8"	10	1,385	1.4 / 3.1	1541.	x x x.	x x.	x x.	x x.	x x x.	x	
	Ø 22 / L 1550 mm	Ø 0.9 / L 61.0"	15	2,080	2.0 / 4.4	1542.	x x.	x x.	x x.	x x.	x x x.	x	
LED 24V CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		Standard: Warm-white	3000 K			x x x.	30.	x x.	x x.	x x.	x x x.	x	
		Optional:	Neutral-white	4000 K			x x x.	40.	x x.	x x.	x x.	x x x.	x
			Extra warm-white	2700 K			x x x.	27.	x x.	x x.	x x.	x x x.	x
		Tunable white	2700 - 6500 K*			x x x.	80.	x x.	x x.	x x.	x x x.	x	
	*(only with gesture control)												
Dimming		Standard: 0 - 10 V				x x x.	x x.	51.	00.	x x.	x x x.	x	
		Optional: DALI dimming				x x x.	x x.	61.	00.	x x.	x x x.	x	
Finish		Standard: 66	Optional: 60										
		bronze anodized brushed	silver anodized brushed	62 black anodized brushed	65 champ. gold anodized brushed		x x x.	x x.	x x.	x x.	.	x x x.	x
Power supply cable		Z 80	black matte								Z80.	x	
Mounting version		F	Height adjustable on canopy										
		R	Ceiling cutout Ø 68 mm / 2.7"										
		Suspension with canopy DB 90/94, 1 power supply cable 2000mm/78.7", and power supply in remote power supply unit.	Suspension with 1 power supply cable 2000 mm / 78.7" and cavity ceiling box, and power supply in remote power supply unit.			x x x.	x x.	x x.	x x.	x x.	x x x.	.	

Canopy:

Type	Size mm / inch
DB 90/94	Mounting version F (Standard) Ø 90 / H 94 mm / 3.5 x 2.0" Color black (10), white on request
DA 80	Mounting version R, Ceiling cutout Ø 68 mm / 2.7" Cover Ø 80 mm 3.1" , installation depth 80 mm / 3.1" Color white (12), similar RAL 9003

Power supply units:

Type / Size mm / inch	Included with Mounting version	Protective rating
DE 1F 360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	F, R	IP 20



Luminaire can be broadly adjusted to the desired position by means of a knurled screw with a counter Weight.

Due to the asymmetrical single point suspension, the luminaire has a desired freedom of movement which may include short-term rotation of the luminaire body by up to 15 - 20 degrees in horizontal and vertical direction caused by external influences such as strong draughts and light touches.

Input voltage for all external power supply units and canopy is **120-277 VAC 50-60 Hz**