


PALITO

Housing: Pendant light, aluminum housing

Design: Ulrich Sattler | Michael Schmidt, Code2design



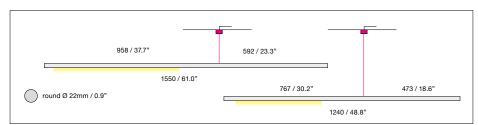

	Size: Ø / L mm	Inches	LED Watt	Lumen ¹	Weight ² kg / lbs	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
SIZE	Ø 22 / L 1240	Ø 0.9 / L 48.8	" 15	1760	1.4 / 3.1	1541.	x x.	x x.	x x.	x x.	x x x.	х
	Ø 22 / L 1550	Ø 0.9 / L 61.0	" 22	2640	2 / 4.4	1542.	x x.	x x.	x x.	x x.	x x x.	Х
LED	(LED)	Warm-white		3000 K	` ,	x x x.	30.	x x.	x x.	x x.	x x x.	х
36V CRI > 90	LED	Neutral-white Extra warm-w		4000 K 2700 K	(- 1)	XXX.	40. 27.	XX. XX.	XX.	X X.	XXX.	X
	54°				,							
Dimming		Without Dimn	ner		(Standard)	x x x.	x x.	01.	00.	x x.	x x x.	х
Finishes	Optional											
Standard	66 brushed anodized bronze	60 62 silver brus anodized anod brushed blac	dized anod	shed dized mp. gold		x x x.	x x.	x x.	x x.		x x x.	Х
Power Supply Cable												
(Standard)	Z 80 Black					x x x.	x x.	x x.	x x.	x x.	Z80.	Х
Mounting Version	R	eiling cutout 68 mm / 2.7"				x x x.	x x.	x x.	x x.	x x.	x x x.	R
	1-point straight suspension (2000 mm / 78.7" max.) with DA80 and remote mounted driver.	canopy										

mm mm

Dimensions of canopy

Type Size mm / inch

DA 80 Mounting version R, Ceiling cutout Ø 68 mm / 2.7"

Cover \emptyset 80 mm 3.1", installation depth 80 mm / 3.1"

Color white 9003

Driver to be placed to a 5" junction box.



xxx. xx. 01. 00. xx. 280. x

Complete order number

Input voltage for all external power supply units and canopy is $\,120\,/\,277\,\,VAC\,\,50/60\,\,Hz$



Luminaire can be tilted to the desired position by adjusting the counterweight knurled-screw.











Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08

PALITO