


Quara IP65


ROUND

QR65-RWH-F-...-WFL...		
Delivered Lumens - Wide Flood		
Diameter [Wattage]		
26 [2 CC]		
CCT	27-	110
	30-	117
	35-	-
	40-	126
Polar Plot / Cone Of Light Multiplier		
26 [2 CC]		
1.00		

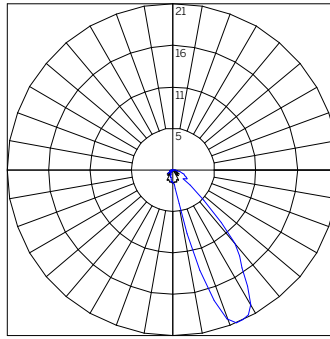

Beam Angle (0-180) = Asymmetric
Beam Angle (90-270) = Asymmetric

ISOILLUMINANCE DIAGRAM - 2W 3000K Wide Flood¹ QR65-RWH-F-26-2-CC-30-WFL²

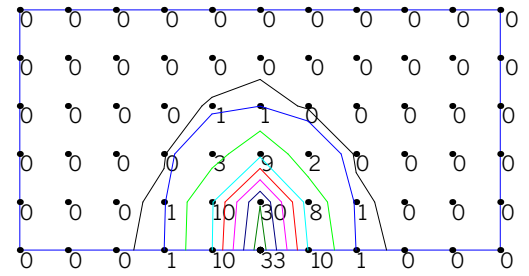

Value [Fc]	Color	Value [Fc]	Color
0.5	Black	15	Red
1	Blue	20	Magenta
5	Green	25	Dark Blue
10	Cyan	30	Dark Green

- 1 Illuminance values in foot-candles for the fixture part number noted. Illuminance points spaced 1'-0" on center.
- 2 Fixture is mounted 1'-0" above the illuminated surface.