


SLIM DELTA  
DIRECT

Housing: Aluminum profile with integrated opal diffuser  
Design: SATTLER

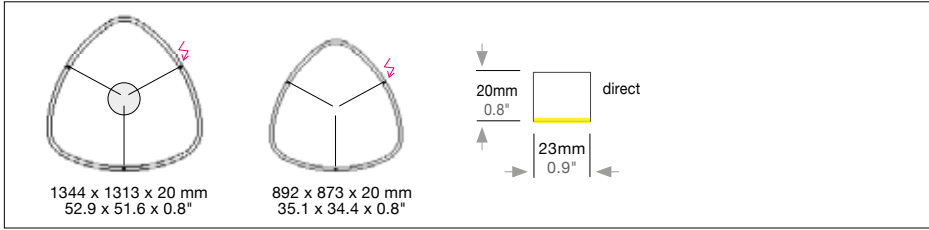


	Size: L x W x H mm	Inches	LED Watt	Lumen <sup>1)</sup>	Weight <sup>2)</sup> kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
<b>Sizes</b>	1344 x 1313 x 20	52.9 x 51.6 x 0.8"	75	4390	5.5 / 12.1	<b>1575.</b>	x x .	x x .	x x .	x x .	x x x .	x
	892 x 873 x 20	35.1 x 34.4 x 0.8"	50	2574	2.8 / 6.1	<b>1577.</b>	x x .	x x .	x x .	x x .	x x x .	x
<b>LED</b> 24V  CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		<b>Standard:</b> Warm-white	<b>3000 K</b>			x x x .	<b>30.</b>	x x .	x x .	x x .	x x x .	x
		<b>Optional:</b> Neutral-white	4000 K			x x x .	<b>40.</b>	x x .	x x .	x x .	x x x .	x
		Extra warm-white	2700 K			x x x .	<b>27.</b>	x x .	x x .	x x .	x x x .	x
		Tunable white*	2700 - 6500 K			x x x .	<b>80.</b>	x x .	x x .	x x .	x x x .	x
		*Only available with DMX.										
<b>Dimming</b>		<b>Standard:</b> 0 - 10 V				x x x .	x x .	<b>51.</b>	<b>00.</b>	x x .	x x x .	x
		<b>Optional:</b> Lutron EcoSystem <sup>A,G,R,K</sup> DMX				x x x .	x x .	<b>91.</b>	<b>00.</b>	x x .	x x x .	x
<b>Finish</b>		<b>Standard:</b> 12 white, powder coated, similar to RAL 9003										
		<b>Optional (Powder coated):</b>	10 black fine textured	11 white, similar to RAL 9010	30 anthracite fine textured	33 sand silver fine textured	34 bronze satined					
			35 gold	36 brass	37 bronze fine textured	38 copper						
		<b>Optional (Premium):</b>	22 aluminum polished	27 brush-finished aluminum								
<b>Power supply cable</b>		<b>Standard:</b> 000 current-carrying F, R, T, K										
		<b>Standard:</b> Z 70 silver Mounting Versions A, B, E, S, G										


7.2024 SLIM DELTA DIRECT

SLIM DELTA  
DIRECT


Housing: Aluminum profile with integrated opal diffuser  
Design: SATTLER

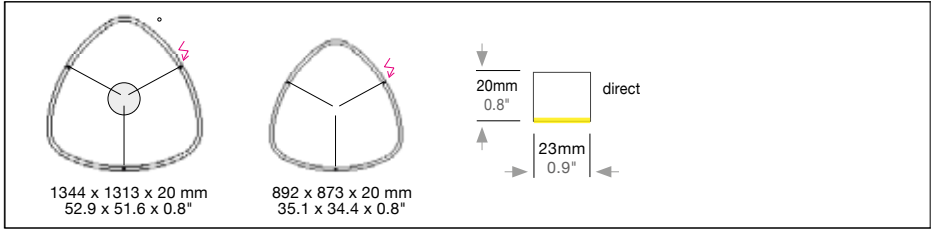


Mounting version




3-point suspension with external power supply unit in suspended ceiling.




3-point suspension with external power supply unit in separate canopy.




Suspension through canopy.




3 current-carrying steel cables.




Suspension with current-carrying steel cables and cavity wall box.




Suspension with pendant canopy PB 375 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1". 25' ceiling height recommended.



Suspension with pendant canopy PB 375 and current-carrying steel cables. (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1". 25' ceiling height recommended.



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling.



Suspension point as clamping unit with 4 cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-

---	---	---	---	---	---	---
-----	-----	-----	-----	-----	-----	-----

Complete order number

A, B, G, R, K = Distance of external power supply unit to light fixture max. 10m / 394".

S, T, K, E, F = Minimum suspension height 670 mm, 450 mm / 26.3", 17.7"

Including steel cable suspension 3000mm/118" and/or power supply cable 3000mm/118" version S,T 5000 + 3000mm / 197"+118"

**Power supply unit:**

Type / Size mm / inch	Included with Mounting version	Protective rating
DE 1F 360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A, G, R, K	IP 20


Input voltage for all external power supply units and canopy is 120-277 VAC 50-60 Hz

**Canopy:**

Type / Size mm / inch	Included with Mounting version	Protective rating
DB 290 Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F	IP 20
PB 375 Ø 90 H 375 mm / 3.5 x 14.8"	S, T	IP 20
DB 145 Ø 145 / 133 / 55 mm / 5.7 x 5.2 / 2.2"	K	IP 20

Color: 12 white, similar RAL 9003, contact factory for other finishes  
Canopy mounts to 4" octagonal junction box.

Optional



Power cable cover plate for mounting version A, G

200. 00. 00. 00. 12. (white)

Consisting of a cavity ceiling box with 3.1" (80mm) round metal cover. Included with mounting version A, G.