


2.4" General Downlight

Round Wall Wash




WG-60RGDL-...-RSRWW-RSC-RWW-W-W				
Delivered Lumens				
		POWER		
		L [5.7W]	M [8.4W]	H [12.0W]
CRI-CCT	92-27	359	495	657
	92-30	386	533	707
	92-35	386	533	707
	92-40	413	570	757
UGR²				
		L [5.7W]	M [8.4W]	H [12.0W]
		38.3	39.4	40.4



Beam Angle (0-180) = 63.3
 Beam Angle (90-270) = 59.0

ISOILLUMINANCE DIAGRAM - HIGH POWER 3500K
 WG-60RGDL-...-H-935-...-RSRWW-RSC-RWW-W-W¹

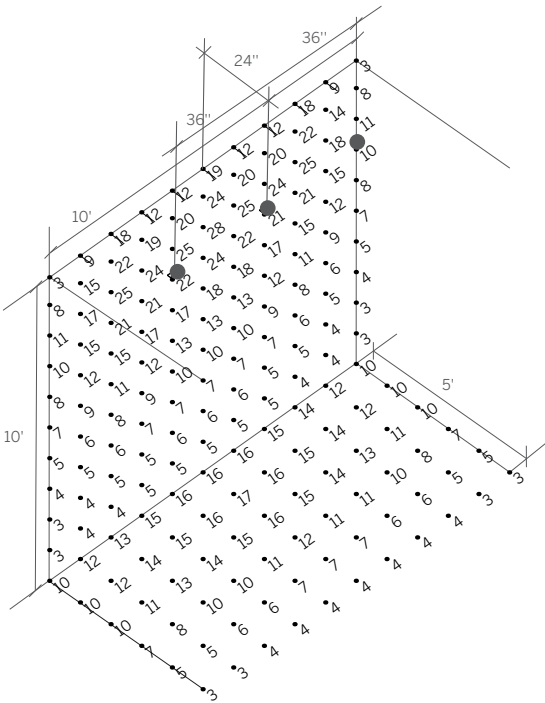

CRI-CCT MULTIPLIER			
927	930	935	940
0.93	1.00	1.00	1.07

POWER MULTIPLIER		
L [5.7W]	M [8.4W]	H [12.0W]
0.55	0.75	1.00

1 Polar Plot and Cone of Light are applicable to part number noted; use Multiplication Factor table to approximate other models or refer to online photometry.
 2 UGR value noted is the maximum UGR (crosswise) with 935 LEDs at noted Power level.