


## 4" ProTools Adjustable Round Recessed




4" round aperture adjustable downlight for general and accent illumination. Available with round recessed cone, regressed pinhole or asymmetric cone with 0.5" regressed 2" round light aperture. Tilt 40°, rotation 365°, 144 step.


<b>Housing</b>	Die-cast aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Trimless housing with Multiple Luminaire Configuration feature allows endless multiple combinations without specialized housings
<b>Covers</b>	RRC - Round Recessed Cone for low brightness, general illumination RRP - Round Regressed Pinhole for smallest aperture, maximum glare control RAC - Round Asymmetric Cone for minimal ceiling interruption and maximum tilt
<b>LED</b>	Constant Current, 92+ CRI (standard), 98+ CRI (optional), 2-Step MacAdam Low/Mid/High/Extra High output choices (delivers up to 74 lumens per watt) 2700K, 3000K, 3500K, 4000K Tunable White (1800 - 4000K) Warm Dim (1800 - 3000K) L70 (TM21 Projected 85°C) Static White = 55,400 hours TW + WD = 55,000 hours 8° (Narrow) = 109,000 hours
<b>Beam</b>	16°, 32°, 41° beam spreads 8° Narrow beam spread (TIR Optic) 18-36° Adjustable (Zoom) beam spread (TIR Optic)
<b>Driver</b>	Integral drivers for all dimming and non-dimming applications Non-Dim, 0-10V, Phase, Lutron and DALI driver options. Through-wire integral driver enclosure installed from Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
<b>Installation Housing</b>	Not required when using the Driver Enclosure LP - Landing Pan NC - New Construction IC - Insulated Ceiling CP - Chicago Plenum
<b>Warranty</b>	5-year Limited (see complete company warranty information)
<b>Certifications</b>	ETL and ETL-C for dry and damp location, CE

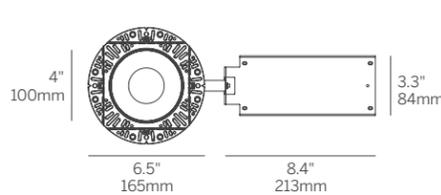


RPT / RRC

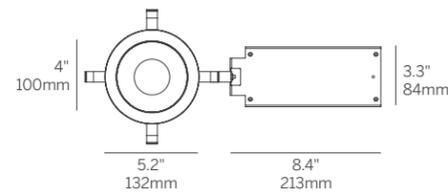

RBT / RRP

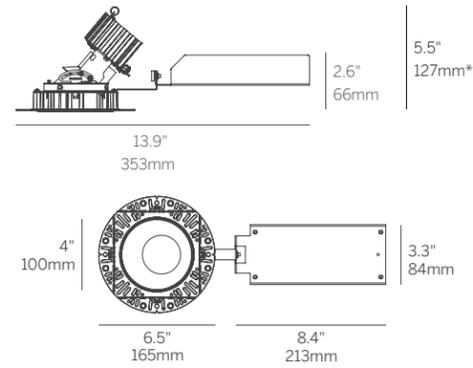

RPT / RAC

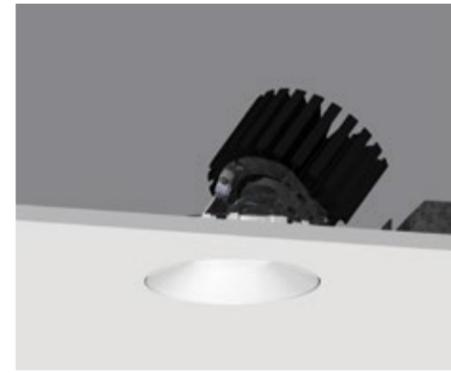

RPT / RRC / MPL



RBT / RRP / MPL



RPT / RAC / MPL

## 4" ProTools Adjustable Round Recessed

Model	Fixation	Power <sup>1</sup>	CRI	CCT <sup>2</sup>	Driver <sup>3</sup>	Cover	Lens	Beam	Trim Finish	Cover Finish	Housing <sup>4</sup>	Options	
WG-100RPTDLX	RPT RBT	L	92	27	S010	RRC	OA	16	W	W	LP	SOL	
		M	98	30	D010	RRP	MPL	32	B	B	NC	LSL	
		H		35	SPH	RAC	RSC	41	S	S	IC	HL	
		XH		40	PEQO			8 (Narrow)	F	F	CP	TC	
		TW	92	TW	D2S			18-36 (Zoom)			X	MLC	
		WD	95	WD	D2T							AS	
												ASL	
												EM	

### Model

- WG-100RPTDLX = 4" ProTools Adjustable Round Recessed

### Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

### Power<sup>1</sup>

- L = Low Power, 5.7W @ 350mA (3.9W for 8° Narrow)
- M = Mid Power, 8.4W @ 500mA (5.8W for 8° Narrow)
- H = High Power, 12W @ 700mA (8.3W for 8° Narrow)
- XH = Extra High Power, 18.6W @ 1050mA (13.1W for 8° Narrow)
- TW = 9W @ 500mA
- WD = 0.4 - 11.8W @ 350mA

### CRI

- 92 = 92 CRI (Static White, TW only)
- 98 = 98 CRI (Static White)
- 95 = 95 CRI (WD only)

### CCT<sup>2</sup>

- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K
- TW = Tunable White 1800 - 4000K
- WD = Warm Dimming 1800 - 3000K

### Driver<sup>3</sup>

- S010 = eldoLED 0-10V 1% dimming, 120-277V (30W)
- D010 = eldoLED 0-10V 0.1% dimming, 120-277V (30W)
- SPH = Phase (2-wire) 3% dimming, 120V only (20W)
- PEQO = Lutron Hi-Lume Premier 0.1% EcoSystem dimming, 120-277V (20W)
- D2S = DALI-2 (DT6) for Static White 0.1% dimming, 120-277V (30W)
- D2T = DALI-2 (DT8) for Tunable White 0.1% dimming, 120-277V (30W)

### Cover

- RRC = Round Recessed Cone
- RRP = Round Regressed Pinhole
- RAC = Round Asymmetric Cone

### Lens

- OA = Open Aperture
- MPL = Micro-prismatic Lens
- RSC = Recessed Satin Clear Lens

### Beam

- 16 = 16° Beam Angle
- 32 = 32° Beam Angle
- 41 = 41° Beam Angle
- 8 = 8° Beam Angle (Narrow) (TIR Optic) (N/A for TW / WD)
- 18-36 = 18-36° Beam Angle (Zoom) (TIR Optic) (OA only) (N/A for TW / WD)

### Trim / Cover Finish

- W = White, 15% gloss, RAL 9003 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finish, specify RAL code

### Housing (optional)<sup>4</sup>

- LP = Landing Pan
- NC = New Construction Housing
- IC = Insulated Ceiling Housing
- CP = Chicago Plenum Housing
- X = No Housing

### Options

- SOL = Solite Lens
- LSL = Linear Spread Lens
- HL = Honeycomb Louver
- TC = Thick Ceiling Clip (see detail page)
- MLC = Multiple luminaire configurations (see detail page)
- AS = Aim stick
- ASL = Aim Stick w/ Laser
- EM = Emergency (remote only)

Whitegoods reserves the right to change any information without prior notice.

### Notes

- Wattage shown does not include power supplies/drivers.
- See photometric data sheet for delivered lumens.
- See driver information for details.
- See housings pages for details.